



# SOLUTIONS

DISPLAYS | TOUCH | EMBEDDED

## TFT-Display Datasheet

# P850QVN02.1 | AUO

### Features

|                         |                             |
|-------------------------|-----------------------------|
| ■ 4K Resolution         |                             |
| ■ Active Screen Area    | 1872.0 x 1053.0 [mm]        |
| ■ Diagonal   Format     | 85“   16:9                  |
| ■ Resolution            | 3840 x 2160                 |
| ■ Colors                | 1,07B   8Bit                |
| ■ Backlight             | LED                         |
| ■ Brightness            | 700 cd/m <sup>2</sup>       |
| ■ LED Life Time         | 60k (h)                     |
| ■ Interface             | V-by-one                    |
| ■ Viewing Angle         | 89/89 L / R 89/89           |
| ■ Touchscreen           | no                          |
| ■ Power Supply          | 12V [Typ.]                  |
| ■ Module Outline        | 1910.0 x 1091.0 x 61.4 [mm] |
| ■ Operation Temperature | 0... + 50°C                 |
| ■ Storage Temperature   | -20... + 60°C               |

### Contact

HY-LINE Computer Components  
Vertriebs GmbH  
Inselkammerstr. 10  
82008 Unterhaching  
Germany

#### Support

**Tel.: +49 (0) 89 / 614 503 40**  
**Fax. +49 (0) 89 / 614 503 50**

#### Send us an email

[computer@hy-line.de](mailto:computer@hy-line.de)

# Model Name: P850QVN02.1

Issue Date : 2018/12/18

( )Preliminary Specifications  
(\*)Final Specifications

| Customer Signature | Date | AUO  | Date |
|--------------------|------|--|------|
| Approved By        |      | Approval By PM Director<br><b>CT Wu</b><br>         |      |
| Note               |      | Reviewed By RD Director<br><b>Jack SC Hsu</b><br>   |      |
|                    |      | Reviewed By Project Leader<br><b>Ming Yu Wu</b><br> |      |
|                    |      | Prepared By PM<br><b>Bryan Chu</b><br>              |      |

## Contents

|       |  |    |
|-------|--|----|
| 1.    | General Description .....                                | 4  |
| 2.    | Absolute Maximum Ratings .....                           | 6  |
| 3.    | Optical Specification .....                              | 7  |
| 4.    | Interface Specification.....                             | 10 |
| 4.1   | Input power.....   | 10 |
| 4.2   | Input Connection.....                                    | 11 |
| 4.3   | Input Data Format.....                                   | 13 |
| 4.3.1 | V by one Data mapping .....                              | 13 |
| 4.3.2 | Color Input Data Reference .....                         | 14 |
| 5.    | Signal Timing Specification .....                        | 15 |
| 5.1   | Input Timing.....  | 15 |
| 5.1.1 | Timing table .....                                       | 15 |
| 5.2   | Input interface characteristics .....                    | 17 |
| 5.2.1 | V by one .....   | 17 |
| 5.3   | Power Sequence for LCD .....                             | 20 |
| 6.    | Backlight Specification.....                             | 21 |
| 6.1   | Electrical specification .....                           | 21 |
| 6.2   | Input Pin Assignment.....                                | 22 |
| 6.3   | Power Sequence for Backlight.....                        | 25 |
| 7.    | Mechanical Characteristics.....                          | 26 |
| 8.    | Reliability Test Items .....                             | 30 |
| 9.    | International Standard .....                             | 31 |
| 9.1   | Safety .....   | 31 |
| 9.2   | EMC .....  | 31 |
| 10.   | Packing .....  | 32 |
| 10.1  | Definition of Label .....                                | 32 |
| 10.2  | Packing Methods .....                                    | 33 |
| 10.3  | Pallet and Shipment Information .....                    | 34 |
| 11.   | Precautions .....  | 35 |
| 11.1. | Mounting Precautions.....                                | 35 |
| 11.2. | Operating Precautions .....                              | 35 |
| 11.3. | Operating Condition for Public Information Display ..... | 36 |
| 11.4. | Electrostatic Discharge Control .....                    | 36 |
| 11.5. | Precautions for Strong Light Exposure.....               | 37 |
| 11.6. | Storage .....  | 37 |
| 11.7. | Handling Precautions for Protection Film .....           | 37 |
| 11.8. | Dust Resistance .....                                    | 37 |

## Record of Revision

| Version | Date       | Page | Description  |
|---------|------------|------|--|
| 0.0     | 2018/05/23 |      | First Released   |
| 0.1     | 2018/06/01 | 21   | Modify External PWM Frequency: Min120, Max 960 kHz                               |
| 0.2     | 2018/07/18 | 10   | Modify input power   |
| 0.3     | 2018/10/09 | 4    | Remove note “8 bit/10 bit selectable”  |
|         |            | 10   | Modify input power   |
| 0.4     | 2018/11/29 | 4    | Correct general description: “10 bits 2 channel LVDS” to “10-bit 8 lanes V-by-1” |
|         |            | 39   | Add Figure 2   |
| 1.0     | 2018/12/18 | 1    | Final Specifications   |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |
|         |            |      |  |

## 1. General Description

This specification applies to the 85 inch Color TFT-LCD Module P850QVN02.1. This LCD module has a TFT active matrix type liquid crystal panel 3840 x 2160 pixels, and diagonal size of 85 inch. This module supports 3840 x 2160 mode. Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 10-bit gray scale signal for each dot.

P850QVN02.1 has been designed to apply the 10-bit 8 Lanes V-by-1 interface method. It is intended to support displays where high brightness, wide viewing angle, high color saturation, and high color depth are very important.

### \* General Information


| Items                  | Specification                   | Unit   | Note                          |
|------------------------|---------------------------------|--------|-------------------------------|
| Active Screen Size     | 85                              | inch   |                               |
| Display Area           | 1872.0(H) x 1053.0(V)           | mm     |                               |
| Outline Dimension      | 1910.0(H) x 1091.0(V) x 61.4(D) | mm     | D: front bezel to T-con cover |
| Driver Element         | a-Si TFT active matrix          |        |                               |
| Bezel Opening          | 1876(H) x 1057(V)               | mm     |                               |
| Display Colors         | 8bit + FRC (1.07 billion)       | Colors |                               |
| Number of Pixels       | 3840x2160                       | Pixel  |                               |
| Pixel Pitch            | 0.4875 (H) x 0.4875 (W)         | mm     |                               |
| Pixel Arrangement      | RGB vertical stripe             |        |                               |
| Display Operation Mode | Normally Black                  |        |                               |
| Surface Treatment      | Anti-glare, 3H                  |        | Reflectance $\leq$ 1.45%      |
| Rotate Function        | Unachievable                    |        | Note 1                        |
| Display Orientation    | Portrait/Landscape Enabled      |        | Note 2                        |

Note 1: Rotate Function refers to LCD display could be able to rotate. This function does not work in this model.


Note 2:

- (1) **Landscape Mode:** The default placement is T-Con Side on the lower side and the image is shown upright via viewing from the front.
- (2) **Portrait Mode:** The default placement is that T-Con side has to be placed on the left side via viewing from the front.

**Landscape (Front view)**

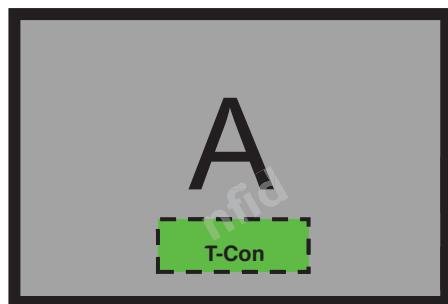

**Portrait (Front view)**

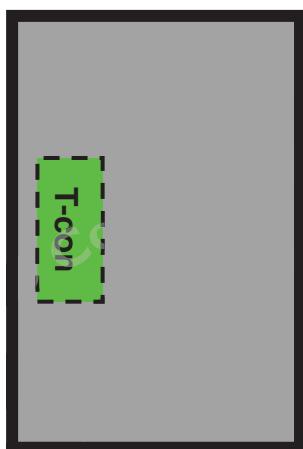

## 2. Absolute Maximum Ratings

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit


| Item                      | Symbol          | Min  | Max | Unit   | Conditions |
|---------------------------|-----------------|------|-----|--------|------------|
| Logic/LCD Drive Voltage   | V <sub>DD</sub> | -0.3 | 14  | [Volt] | Note 1     |
| Input Voltage of Signal   | V <sub>in</sub> | -0.3 | 4   | [Volt] | Note 1     |
| Operating Temperature     | T <sub>OP</sub> | 0    | +50 | [°C]   | Note 2     |
| Operating Humidity        | H <sub>OP</sub> | 10   | 90  | [%RH]  | Note 2     |
| Storage Temperature       | T <sub>ST</sub> | -20  | +60 | [°C]   | Note 2     |
| Storage Humidity          | H <sub>ST</sub> | 10   | 90  | [%RH]  | Note 2     |
| Panel Surface Temperature | P <sub>ST</sub> |      | 65  | [°C]   | Note 3     |

Note 1: Duration:50 msec.

Note 2 : Maximum Wet-Bulb should be 39°C and No condensation.

The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less. At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C


Note 3: Surface temperature is measured at 50°C Dry condition

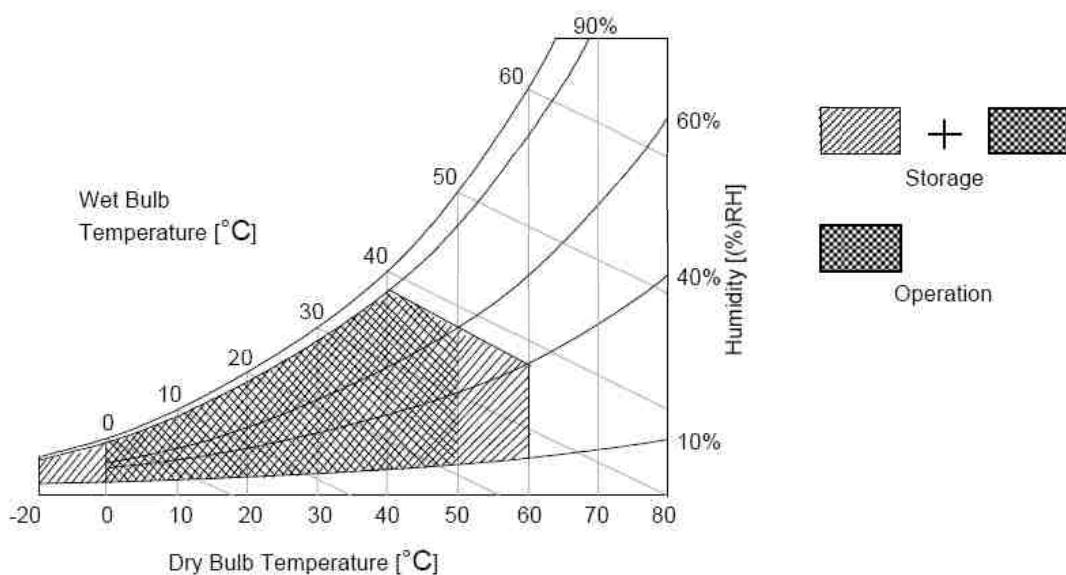

### 3. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 45 minutes in a dark environment at 25°C. The values specified are at an approximate distance 500 mm from the LCD surface at a viewing angle of  $\phi$  and  $\theta$  equal to 0°.

Fig.1 presents additional information concerning the measurement equipment and method.

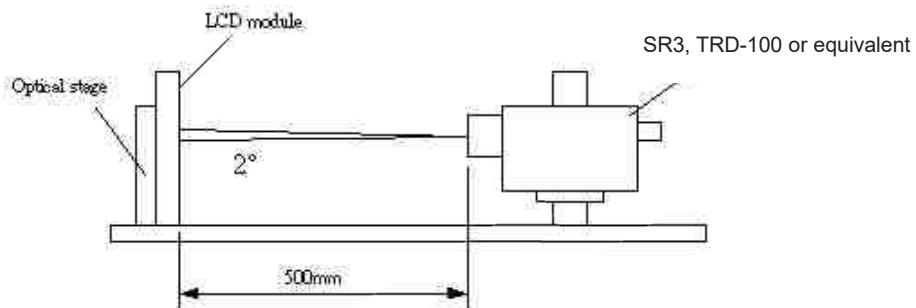

| Parameter                         | Symbol                  | Values    |       |           | Unit              | Notes |
|-----------------------------------|-------------------------|-----------|-------|-----------|-------------------|-------|
|                                   |                         | Min.      | Typ.  | Max       |                   |       |
| Contrast Ratio                    | CR                      | 3200      | 4000  | --        |                   | 1     |
| Surface Luminance (White)         | L <sub>WH</sub>         | 560       | 700   | --        | cd/m <sup>2</sup> | 2     |
| Luminance Variation               | ΔL <sub>WHITE(9P)</sub> | --        | --    | 1.33      |                   | 3     |
| Response Time (G to G)            | T <sub>γ</sub>          | --        | 8.5   | 16        | ms                | 4     |
| Color Gamut                       | NTSC                    |           | 88    |           | %                 |       |
| Color Coordinates                 |                         |           |       |           |                   |       |
| Red                               | R <sub>x</sub>          | Typ.-0.03 | 0.670 | Typ.+0.03 |                   |       |
|                                   | R <sub>y</sub>          |           | 0.313 |           |                   |       |
| Green                             | G <sub>x</sub>          |           | 0.267 |           |                   |       |
|                                   | G <sub>y</sub>          |           | 0.655 |           |                   |       |
| Blue                              | B <sub>x</sub>          |           | 0.152 |           |                   |       |
|                                   | B <sub>y</sub>          |           | 0.056 |           |                   |       |
| White                             | W <sub>x</sub>          |           | 0.280 |           |                   |       |
|                                   | W <sub>y</sub>          |           | 0.290 |           |                   |       |
| Viewing Angle                     |                         |           |       |           |                   | 5     |
| x axis, right( $\phi=0^\circ$ )   | θ <sub>r</sub>          | --        | 89    | --        | degree            |       |
| x axis, left( $\phi=180^\circ$ )  | θ <sub>l</sub>          | --        | 89    | --        | degree            |       |
| y axis, up( $\phi=90^\circ$ )     | θ <sub>u</sub>          | --        | 89    | --        | degree            |       |
| y axis, down ( $\phi=270^\circ$ ) | θ <sub>d</sub>          | --        | 89    | --        | degree            |       |

Note:

1. Contrast Ratio (CR) is defined mathematically as:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance of } L_{on5}}{\text{Surface Luminance of } L_{off5}}$$

2. Surface luminance is luminance value at point 5 across the LCD surface 50cm from the surface with all pixels displaying white. From more information see FIG 2. LED current  $I_F$  = typical value (without driver board), LED input  $V_{DDB} = 24V$ ,  $I_{DDB}$  = Typical value (with driver board),  $L_{WH} = L_{on5}$  where  $L_{on5}$  is the luminance with all pixels displaying white at center 5 location.
3. The variation in surface luminance,  $\delta_{WHITE}$  is defined (center of Screen) as:  


$$\delta_{WHITE(9P)} = \text{Maximum}(L_{on1}, L_{on2}, \dots, L_{on9}) / \text{Minimum}(L_{on1}, L_{on2}, \dots, L_{on9})$$
4. Response time  $T_\gamma$  is the average time required for display transition by switching the input signal for five luminance ratio (0%, 25%, 50%, 75%, 100% brightness matrix) and is based on Frame rate = 60Hz to optimize.



| Measured Response Time |      | Target     |             |             |             |           |             |             |
|------------------------|------|------------|-------------|-------------|-------------|-----------|-------------|-------------|
|                        |      | 0%         | 25%         | 50%         | 75%         | 100%      |             |             |
| Start                  | 0%   | 0% to 25%  |             |             |             | 0% to 50% | 0% to 75%   | 0% to 100%  |
|                        | 25%  | 25% to 0%  | 25% to 50%  |             |             |           | 25% to 75%  | 25% to 100% |
|                        | 50%  | 50% to 0%  | 50% to 25%  | 50% to 75%  |             |           | 50% to 100% |             |
|                        | 75%  | 75% to 0%  | 75% to 25%  | 75% to 50%  | 75% to 100% |           |             |             |
|                        | 100% | 100% to 0% | 100% to 25% | 100% to 50% | 100% to 75% |           |             |             |

$T_\gamma$  is determined by 10% to 90% brightness difference of rising or falling period. (As illustrated)


The response time is defined as the following figure and shall be measured by switching the input signal for "any level of gray(bright)" and "any level of gray(dark)".

**Any level of gray (Bright)**      **Any level of gray (Dark)**      **Any level of gray (Bright)**

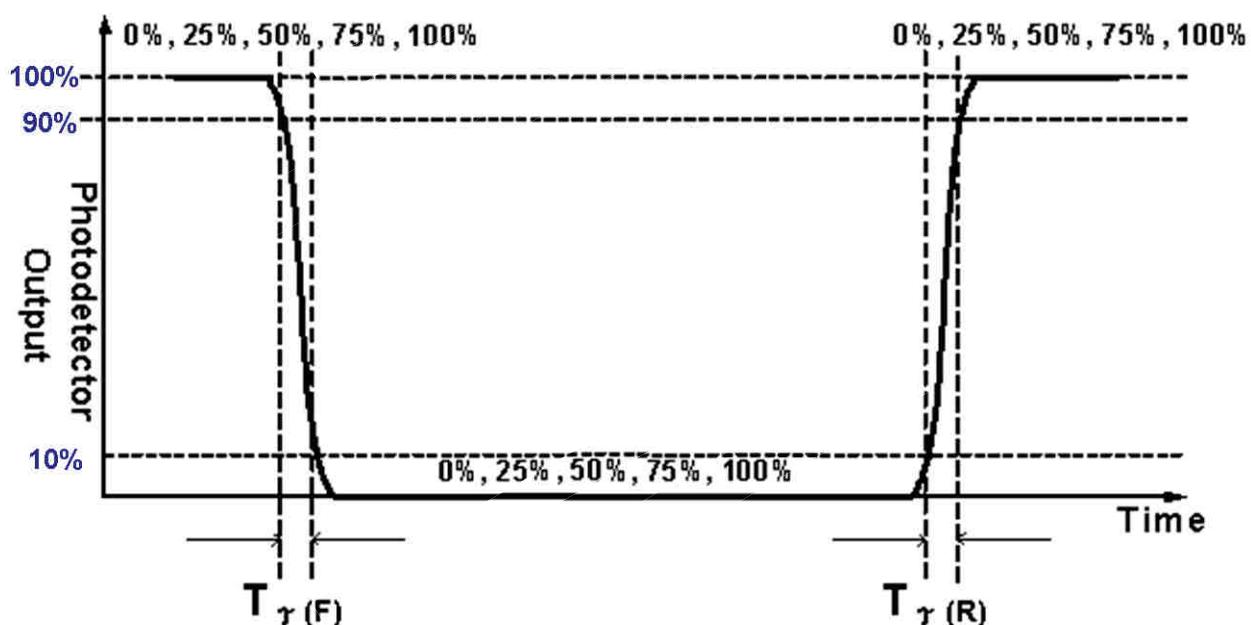

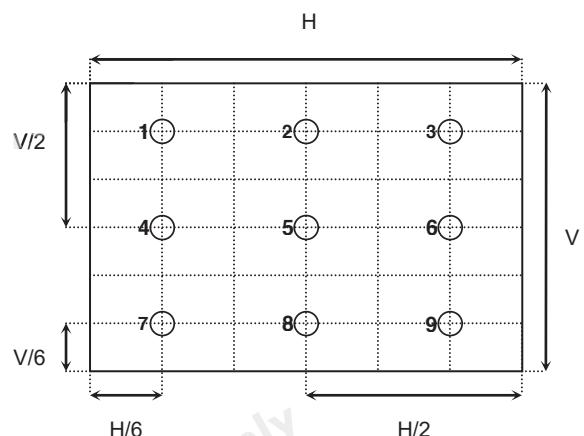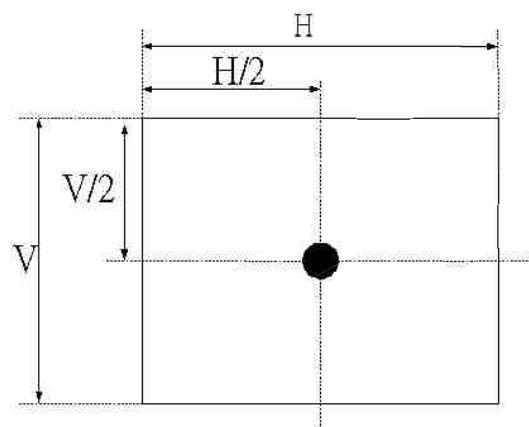**FIG. 2 Luminance**


5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG3.

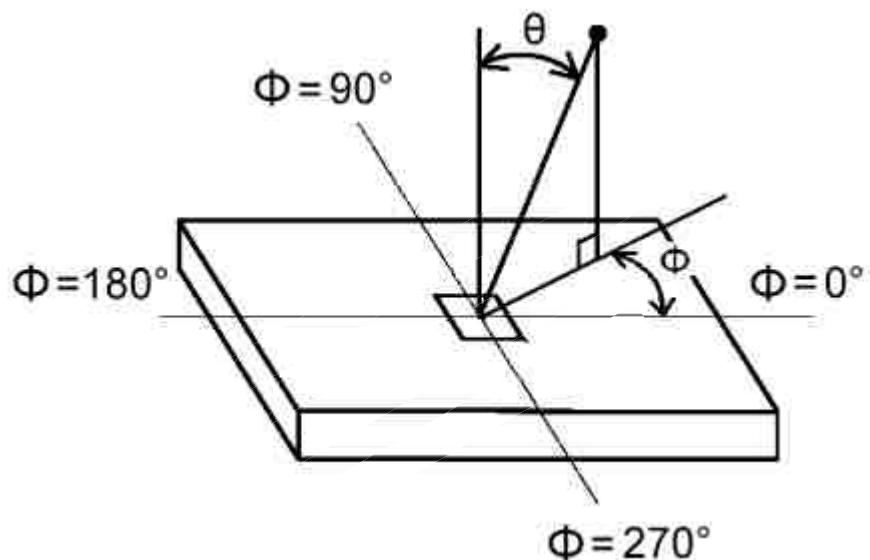**FIG.3 Viewing Angle**


## 4. Interface Specification

### 4.1 Input power

The P850QVN02.1 module requires 2 power inputs(12-pin & 14-pin) which are employed to power the LCD electronics and to drive the TFT array and liquid crystal.

| Item                       | Symbol        | Min.     | Typ. | Max  | Unit  | Note |
|----------------------------|---------------|----------|------|------|-------|------|
| Power Supply Input Voltage | $V_{DD}$      | 10.8     | 12   | 13.2 | V     | 1    |
| Power Supply Input Current | Black pattern | $I_{DD}$ | -    | 1.4  | 1.7   | A    |
|                            | White pattern |          | -    | 4.4  | 5.3   | A    |
| Power Consumption          | Black pattern | $P_c$    | -    | 16.8 | 20.16 | Watt |
|                            | White pattern |          | -    | 52.8 | 63.4  | Watt |
| Inrush Current             | $I_{RUSH}$    | --       | --   | 11   | A     | 3    |

**Note1.** The ripple voltage should be fewer than 5% of  $V_{DD}$ .

**Note2.** Test Condition:

- (1)  $V_{DD} = 12.0V$ , (2)  $F_v = 60Hz$ , (3)  $F_{Clk} = 74.25MHz$ , (4) Temperature =  $25^{\circ}C$
- (5) Power dissipation check pattern. (Only for power design)


a. Black pattern



b. White pattern



**Note3.** Measurement condition : Rising time = 400us

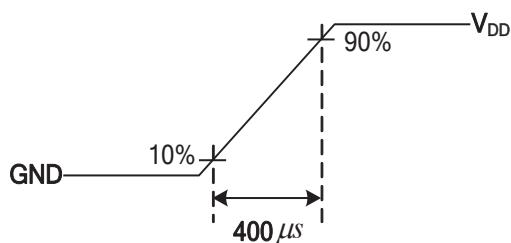


## 4.2 Input Connection

- LCD connector: (JAE) SJ11346-FI-RTE51SZ-HF

| PIN | Symbol          | Description  | Note | PIN | Symbol | Description | Note |
|-----|-----------------|--|------|-----|--------|-------------|------|
| 1   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 26  | LOCKN  | Vx1 LOCK    |      |
| 2   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 27  | GND    | Ground      |      |
| 3   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 28  | RXON   | Vx1 lane 0  |      |
| 4   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 29  | RXOP   | Vx1 lane 0  |      |
| 5   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 30  | GND    | Ground      |      |
| 6   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 31  | RX1N   | Vx1 lane 1  |      |
| 7   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 32  | Rx1P   | Vx1 lane 1  |      |
| 8   | V <sub>DD</sub> | Power Supply Input Voltage   |      | 33  | GND    | Ground      |      |
| 9   | N.C.            | No connection  | 2    | 34  | RX2N   | Vx1 lane 2  |      |
| 10  | GND             | Ground   |      | 35  | RX2P   | Vx1 lane2   |      |
| 11  | GND             | Ground   |      | 36  | GND    | Ground      |      |
| 12  | GND             | Ground   |      | 37  | RX3N   | Vx1 lane 3  |      |
| 13  | GND             | Ground   |      | 38  | RX3P   | Vx1 lane 3  |      |
| 14  | GND             | Ground   |      | 39  | GND    | Ground      |      |
| 15  | LDC             | Local Dimming Control<br>Open / High(3.3v): enable<br>Low: disable | 3    | 40  | RX4N   | Vx1 lane 4  |      |
| 16  | N.C.            | No connection  | 2    | 41  | RX4P   | Vx1 lane 4  |      |
| 17  | N.C.            | No connection  | 2    | 42  | GND    | Ground      |      |
| 18  | N.C.            | No connection  | 2    | 43  | RX5N   | Vx1 lane 5  |      |
| 19  | N.C.            | No connection  | 2    | 44  | RX5P   | Vx1 lane 5  |      |
| 20  | N.C.            | No connection  | 2    | 45  | GND    | Ground      |      |
| 21  | N.C.            | No connection  | 2    | 46  | RX6N   | Vx1 lane 6  |      |
| 22  | N.C.            | No connection  | 2    | 47  | RX6P   | Vx1 lane 6  |      |
| 23  | N.C.            | No connection  | 2    | 48  | GND    | Ground      |      |
| 24  | GND             | Ground   |      | 49  | RX7N   | Vx1 lane 7  |      |
| 25  | HTPDN           | Vx1 HTPDN  |      | 50  | RX7P   | Vx1 lane 7  |      |
|     |                 |  |      | 51  | GND    | Ground      |      |

Note1. Pin number start from the left side as the following figure.

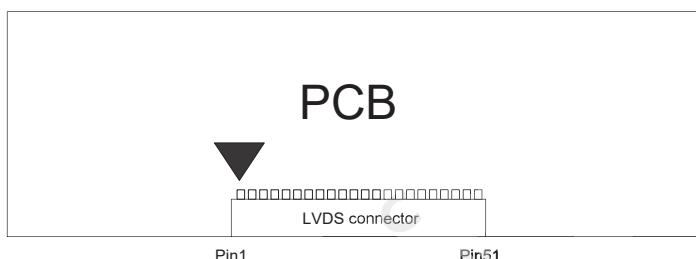


Note2. Please leave this pin unoccupied. It can not be connected by any signal (Low/GND/High).

## Note3. Input control signal threshold voltage definition

| Item                         | Symbol | Min. | Typ. | Max. | Unit |
|------------------------------|--------|------|------|------|------|
| Input High Threshold Voltage | VIH    | 2.7  | -    | 3.6  | V    |
| Input Low Threshold Voltage  | VIL    | 0    | -    | 0.6  | V    |

## Open/High(3.3V)

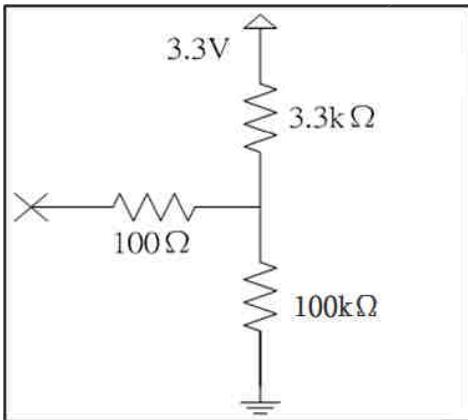

## 4.3 Input Data Format

### 4.3.1 V by one Data mapping

| Mode       | Packer input & Unpacker output |       | 30bpp RGB /YCbCr444 (10bit) |
|------------|--------------------------------|-------|-----------------------------|
| 4byte mode | Byte0                          | D[0]  | R/Cr[2]                     |
|            |                                | D[1]  | R/Cr[3]                     |
|            |                                | D[2]  | R/Cr[4]                     |
|            |                                | D[3]  | R/Cr[5]                     |
|            |                                | D[4]  | R/Cr[6]                     |
|            |                                | D[5]  | R/Cr[7]                     |
|            |                                | D[6]  | R/Cr[8]                     |
|            |                                | D[7]  | R/Cr[9]                     |
| Byte1      | Byte1                          | D[8]  | G/Y[2]                      |
|            |                                | D[9]  | G/Y[3]                      |
|            |                                | D[10] | G/Y[4]                      |
|            |                                | D[11] | G/Y[5]                      |
|            |                                | D[12] | G/Y[6]                      |
|            |                                | D[13] | G/Y[7]                      |
|            |                                | D[14] | G/Y[8]                      |
|            |                                | D[15] | G/Y[9]                      |
| Byte2      | Byte2                          | D[16] | B/Cb[2]                     |
|            |                                | D[17] | B/Cb[3]                     |
|            |                                | D[18] | B/Cb[4]                     |
|            |                                | D[19] | B/Cb[5]                     |
|            |                                | D[20] | B/Cb[6]                     |
|            |                                | D[21] | B/Cb[7]                     |
|            |                                | D[22] | B/Cb[8]                     |
|            |                                | D[23] | B/Cb[9]                     |
| Byte3      | Byte3                          | D[24] | --                          |
|            |                                | D[25] | --                          |
|            |                                | D[26] | B/Cb[0]                     |
|            |                                | D[27] | B/Cb[1]                     |
|            |                                | D[28] | G/Y[0]                      |
|            |                                | D[29] | G/Y[1]                      |
|            |                                | D[30] | R/Cr[0]                     |
|            |                                | D[31] | R/Cr[1]                     |

### 4.3.2 Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 10 bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

**COLOR DATA REFERENCE**

| Color       |             | Input Color Data |   |   |   |   |     |   |   |   |   |       |   |   |   |   |     |   |   |   |   |      |   |   |   |   |     |   |   |   |   |
|-------------|-------------|------------------|---|---|---|---|-----|---|---|---|---|-------|---|---|---|---|-----|---|---|---|---|------|---|---|---|---|-----|---|---|---|---|
|             |             | RED              |   |   |   |   |     |   |   |   |   | GREEN |   |   |   |   |     |   |   |   |   | BLUE |   |   |   |   |     |   |   |   |   |
|             |             | MSB              |   |   |   |   | LSB |   |   |   |   | MSB   |   |   |   |   | LSB |   |   |   |   | MSB  |   |   |   |   | LSB |   |   |   |   |
| Basic Color | Black       | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | Red(1023)   | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | Green(1023) | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 1     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | Blue(1023)  | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 1    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 |
|             | Cyan        | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 1    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 |
|             | Magenta     | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 1    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 |
|             | Yellow      | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 1     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | White       | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 1     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 1    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 |
| R           | RED(000)    | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | RED(001)    | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 1 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | ---         |                  |   |   |   |   |     |   |   |   |   |       |   |   |   |   |     |   |   |   |   |      |   |   |   |   |     |   |   |   |   |
|             | RED(1022)   | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | RED(1023)   | 1                | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
| G           | GREEN(000)  | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | GREEN(001)  | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 1 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | ---         |                  |   |   |   |   |     |   |   |   |   |       |   |   |   |   |     |   |   |   |   |      |   |   |   |   |     |   |   |   |   |
|             | GREEN(1022) | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 1     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | GREEN(1023) | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 1     | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
| B           | BLUE(000)   | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 |
|             | BLUE(001)   | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 1 |
|             | ---         |                  |   |   |   |   |     |   |   |   |   |       |   |   |   |   |     |   |   |   |   |      |   |   |   |   |     |   |   |   |   |
|             | BLUE(1022)  | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 0 |
|             | BLUE(1023)  | 0                | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0     | 0 | 0 | 0 | 0 | 0   | 0 | 0 | 0 | 0 | 0    | 1 | 1 | 1 | 1 | 1   | 1 | 1 | 1 | 1 |

## 5. Signal Timing Specification

This is the signal timing required at the input of the user connector. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

### 5.1 Input Timing

#### 5.1.1 Timing table

**Timing Table (DE only Mode)**

| Signal               | Item      | Symbol      | Min. | Typ.  | Max   | Unit |
|----------------------|-----------|-------------|------|-------|-------|------|
| Vertical Section     | Period    | Tv          | 2230 | 2250  | 2715  | Th   |
|                      | Active    | Tdisp (v)   | 2160 |       | 2160  |      |
|                      | Blanking  | Tblk (v)    | 70   | 90    | 555   | Th   |
| Horizontal Section   | Period    | Th          | 538  | 550   | 600   | Tclk |
|                      | Active    | Tdisp (h)   | 480  |       |       |      |
|                      | Blanking  | Tblk (h)    | 58   | 70    | 120   | Tclk |
| Clock                | Frequency | Fclk=1/Tclk | 66   | 74.25 | 77    | MHz  |
| Vertical Frequency   | Frequency | Fv          | 47   | 60    | 63    | Hz   |
| Horizontal Frequency | Frequency | Fh          | 120  | 135   | 139.2 | KHz  |

Notes:

(1) Display position is specific by the rise of DE signal only.


Horizontal display position is specified by the rising edge of 1<sup>st</sup> DCLK after the rise of 1<sup>st</sup> DE, is displayed on the left edge of the screen.

(2) Vertical display position is specified by the rise of DE after a “Low” level period equivalent to eight times of horizontal period. The 1<sup>st</sup> data corresponding to one horizontal line after the rise of 1<sup>st</sup> DE is displayed at the top line of screen.

(3) If a period of DE “High” is less than 1920 DCLK or less than 1080 lines, the rest of the screen displays black.

(4) The display position does not fit to the screen if a period of DE “High” and the effective data period do not synchronize with each other.

## 5.1.2 Signal Timing Waveform

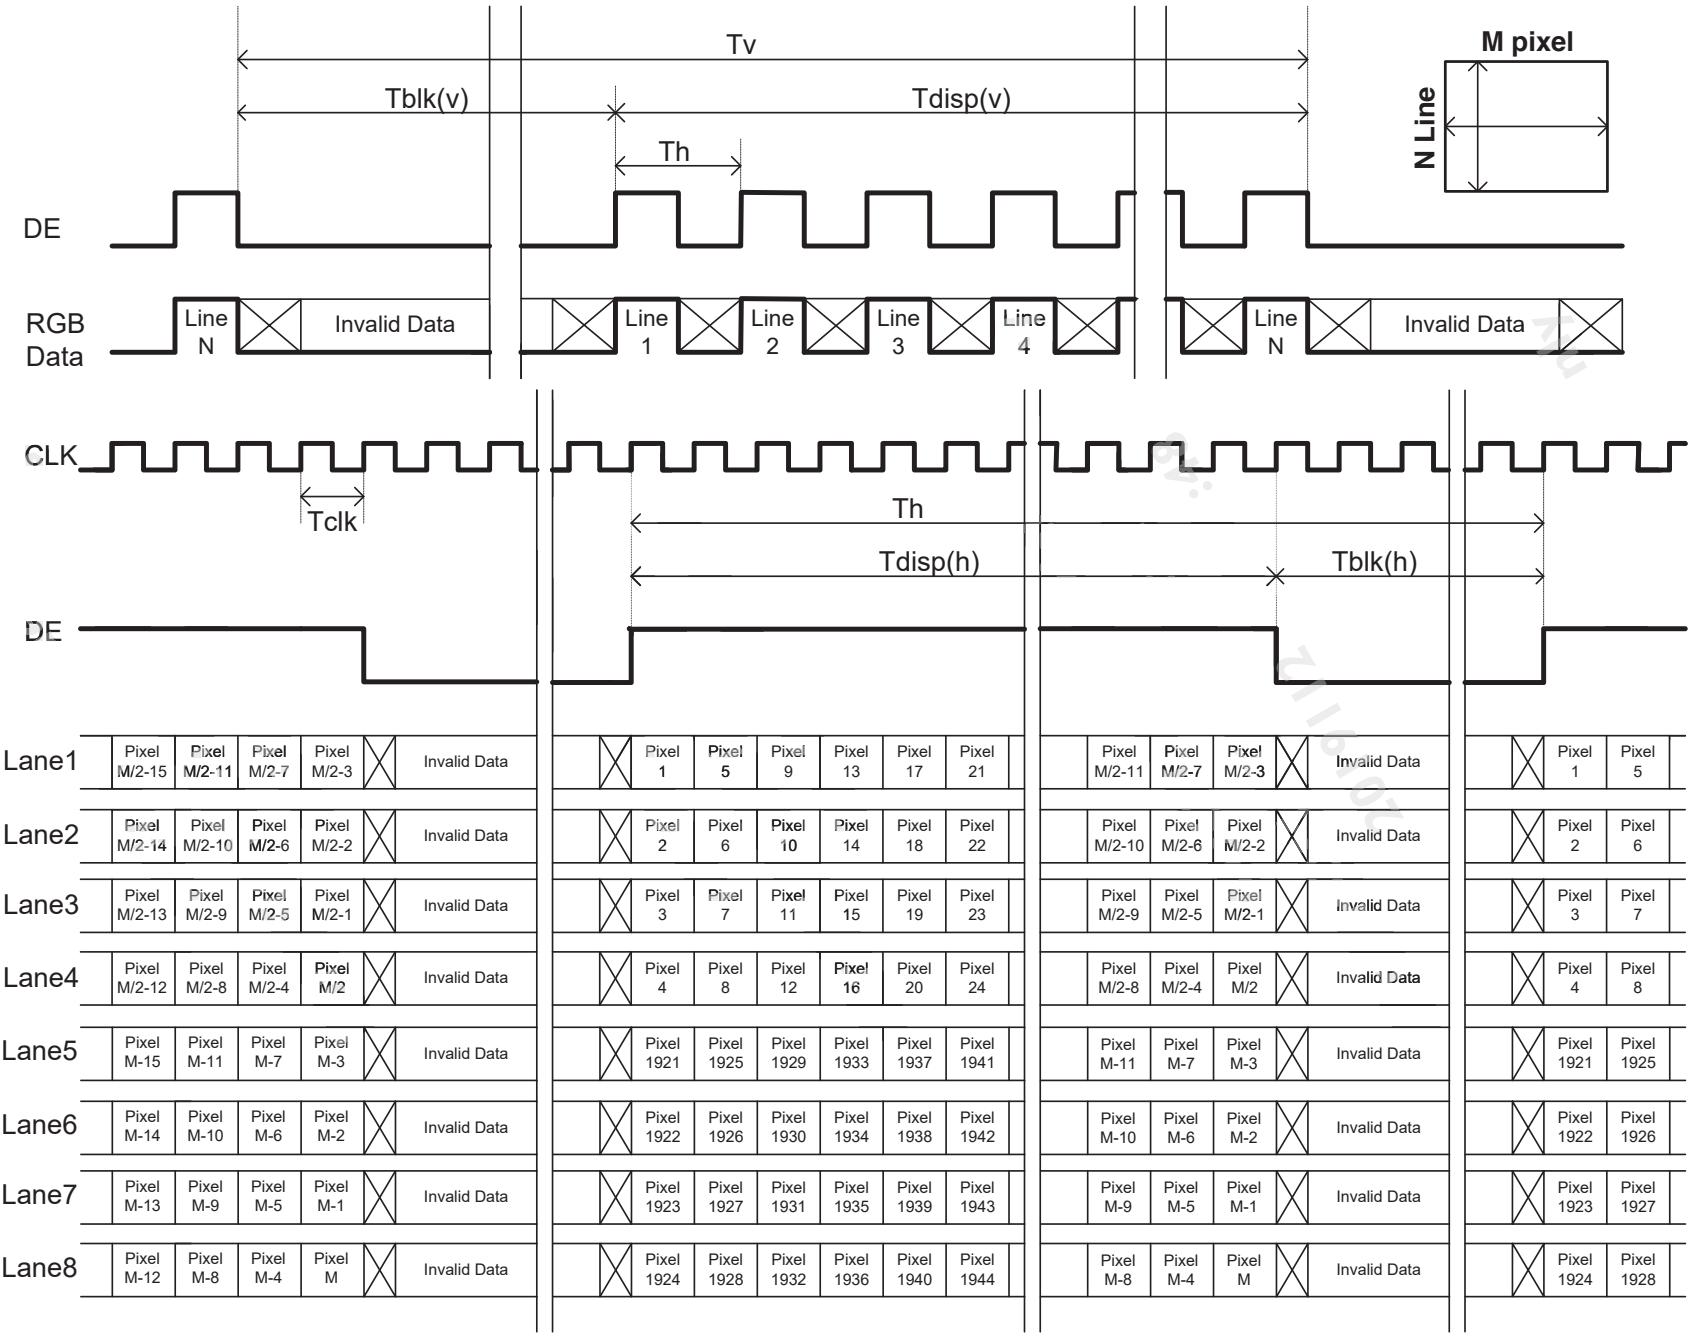


## 5.2 Input interface characteristics

### 5.2.1 V by one


| Item               | Symbol  | Min.               | Typ.          | Max  | Unit          | Note             |
|--------------------|---|--------------------|---------------|------|---------------|------------------|
| V-by-one Interface | VRXINP/N input each bit Period                        | $T_{RRIP}$<br>(UI) | 310           | --   | 379           | ps<br>1          |
|                    | Receiver Clock : Spread Spectrum Modulation range     | Fclk_ss            | Fclk<br>-0.5% | --   | Fclk<br>+0.5% | MHz<br>2         |
|                    | Receiver Clock : Spread Spectrum Modulation frequency | Fss                | 30            |      |               | KHz<br>2         |
|                    | CDR training pattern time                             | $T_{LOCK}$         | --            | 500  | --            | us<br>1          |
|                    | Latency from LOCKN 'HIGH' to clock training pattern   | L1                 | 0             | --   | --            | us<br>1          |
|                    | Latency from LOCKN 'LOW' to normal 8b10b data         | L2                 | --            | --   | 70            | us<br>1          |
|                    | CML Differential Input High Threshold                 | $V_{RTH}$          | +50           | --   | --            | mV <sub>DC</sub> |
|                    | CML Differential Input Low Threshold                  | $V_{RTL}$          | --            | --   | -50           | mV <sub>DC</sub> |
|                    | CML Common mode Bias Voltage                          | $V_{RCT}$          | 0.8           | 0.9  | 1.0           | mV <sub>DC</sub> |
|                    | Intra-pair skew                                       | $T_{INTRA}$        | --            | --   | 0.3           | UI<br>3          |
|                    | Inter-pair skew                                       | $T_{INTER}$        | --            | --   | 5             | UI<br>4          |
|                    | Eye diagram at receiver                               | A_X                | --            | 0.25 | --            | UI               |
|                    |   | A_Y                | --            | 0    | --            | mV               |
|                    |   | B_X                | --            | 0.3  | --            | UI               |
|                    |   | B_Y                | --            | 50   | --            | mV               |
|                    |   | C_X                | --            | 0.7  | --            | UI               |
|                    |   | C_Y                | --            | 50   | --            | mV               |
|                    |   | D_X                | --            | 0.75 | --            | UI               |
|                    |   | D_Y                | --            | 0    | --            | mV               |
|                    |   | E_X                | --            | 0.7  | --            | UI               |
|                    |   | E_Y                | --            | -50  | --            | mV               |
|                    |   | F_X                | --            | 0.3  | --            | UI               |
|                    |   | F_Y                | --            | -50  | --            | mV               |

Note :


#### 1. V-by-one Signal diagram

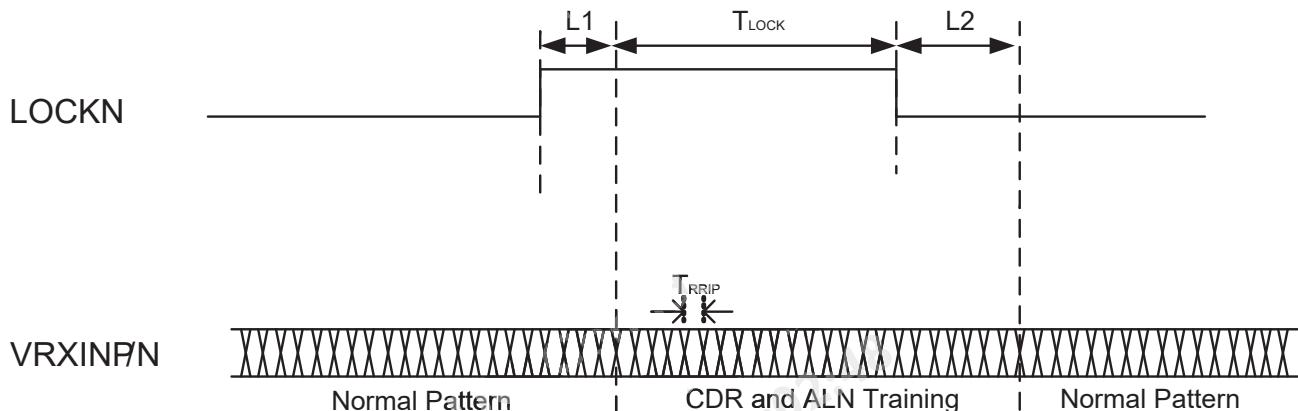


2. Receiver Clock SSCG (Spread spectrum clock generator) is defined as below figures.

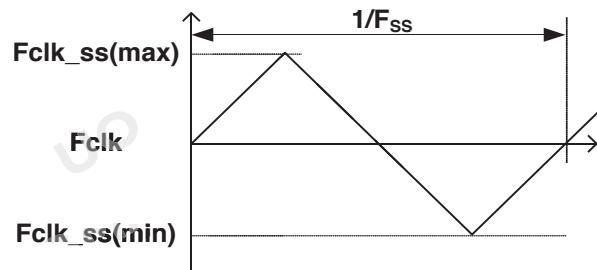

3. V-by-one Intra-pair Skew

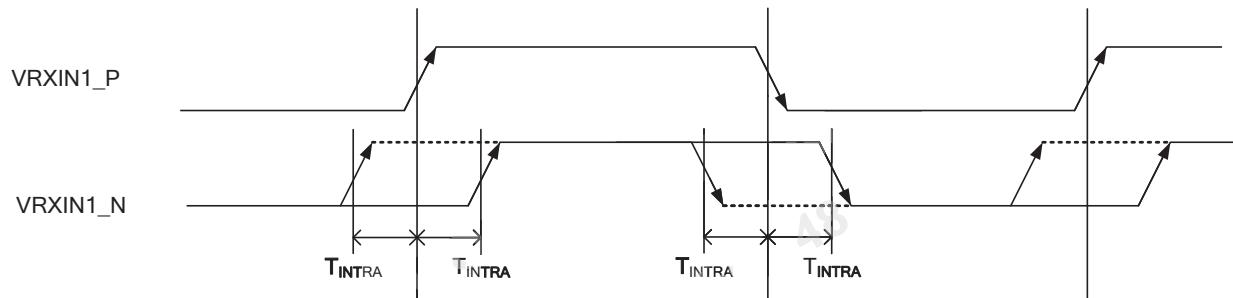


4. V-by-one Inter-pair Skew

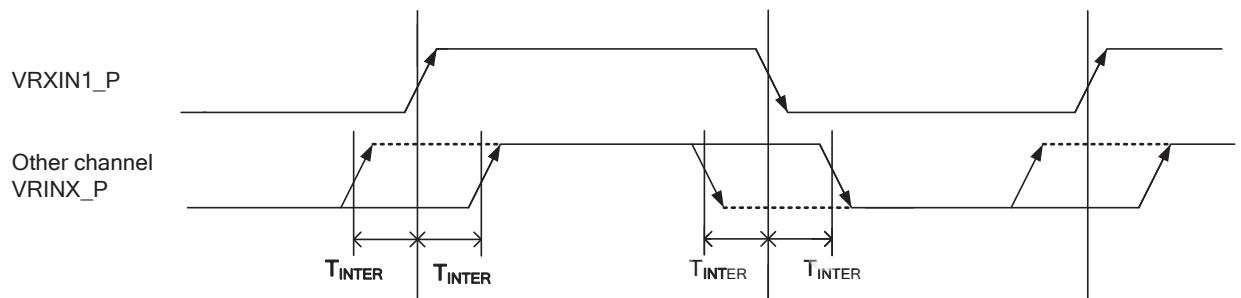

## 5. Eye diagram at receiver


### Eye Mask

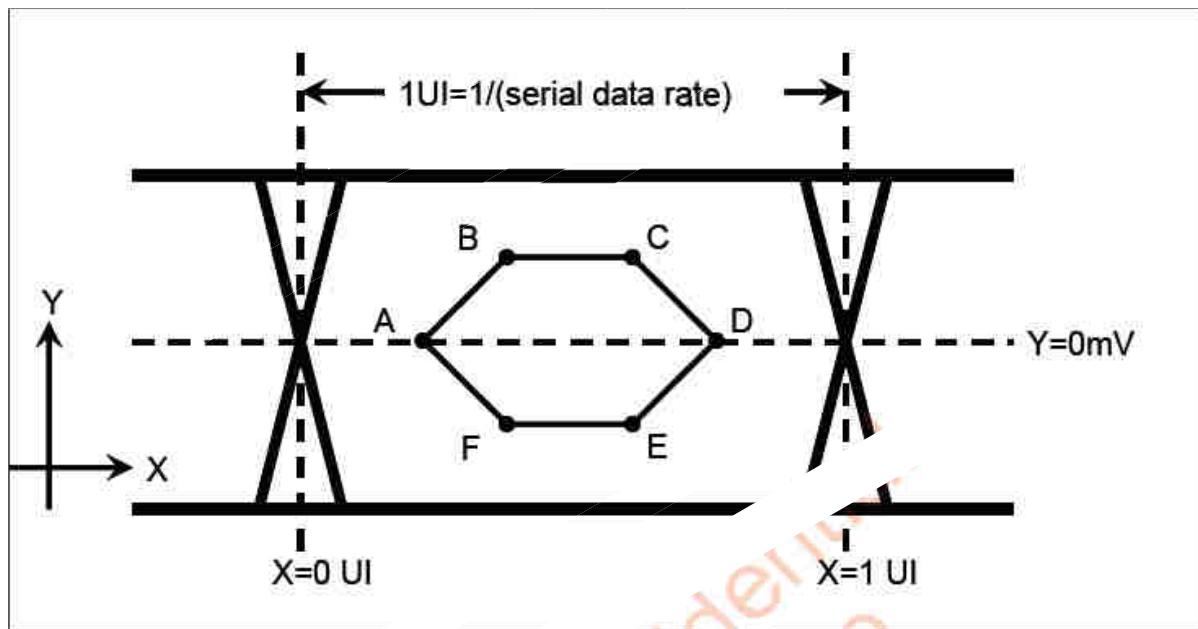

### Example of Eye diagram



### 5.3 Power Sequence for LCD

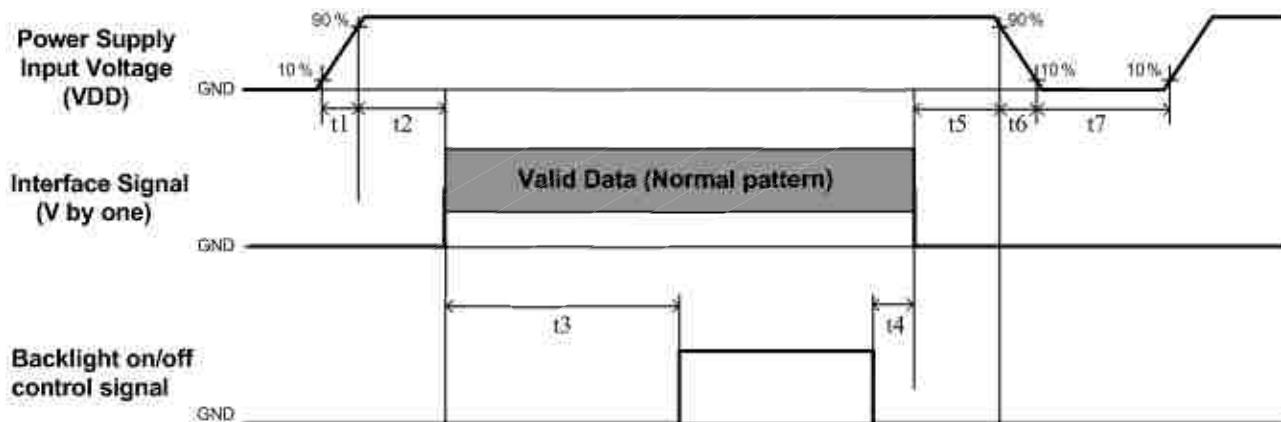

| Parameter | Values |       |      | Unit |
|-----------|--------|-------|------|------|
|           | Min.   | Type. | Max. |      |
| t1        | 0.4    | ---   | 30   | ms   |
| t2        | 40     | ---   | ---  | ms   |
| t3        | 2400   | ---   | ---  | ms   |
| t4        | 0*     | ---   | ---  | ms   |
| t5        | 0      | ---   | ---  | ms   |
| t6        | ---    | ---   | ---  | ms   |
| t7        | 1000   | ---   | ---  | ms   |

Note :

- (1) t4=0 : concern for residual pattern before BLU turn off.
- (2) t6 : voltage of VDD must decay smoothly after power-off. (customer system decide this value)
- (3) When the power supply input voltage(VDD) is off, be sure to pull down the valid and the invalid data to 0V.


## 6. Backlight Specification

### 6.1 Electrical specification

|    | Item  | Symbol              |     | Condition             | Min            | Typ    | Max   | Unit | Note |
|----|---|---------------------|-----|-----------------------|----------------|--------|-------|------|------|
| 1  | Power Supply Input Voltage                    | V <sub>DDB</sub>    |     | -                     | 22.8           | 24     | 25.2  | V    | -    |
| 2  | Power Supply Input Current                    | I <sub>DDB</sub>    |     | V <sub>DDB</sub> =24V |                | 11.6   | 12.6  | A    | 1    |
| 3  | Power Consumption                             | P <sub>DDB</sub>    |     | V <sub>DDB</sub> =24V |                | 277    | 301.8 | Watt | 1    |
| 4  | Inrush Current                                | I <sub>RUSH</sub>   |     | V <sub>DDB</sub> =24V |                |        | 21    | A    | 2    |
| 5  | Control signal voltage                        | V <sub>Signal</sub> | Hi  | V <sub>DDB</sub> =24V | 2              | -      | 3.3   | V    | -    |
|    |   |                     | Low |                       | -0.3           | -      | 0.8   |      | 3    |
| 6  | Control signal current                        | I <sub>Signal</sub> |     | V <sub>DDB</sub> =24V | -              | -      | 1.5   | mA   | -    |
| 7  | External PWM Duty ratio<br>(input duty ratio) | D <sub>EPWM</sub>   |     | V <sub>DDB</sub> =24V | 5              | -      | 100   | %    | 4    |
| 8  | External PWM Frequency                        | F <sub>EPWM</sub>   |     | V <sub>DDB</sub> =24V | 120            | -      | 960   | Hz   | 4    |
| 9  | DET status signal                             | DET                 | Hi  | V <sub>DDB</sub> =24V | Open Collector |        |       | V    | 5    |
|    |   |                     | Lo  |                       | 0              | -      | 0.8   | V    | 5    |
| 10 | Input Impedance                               | R <sub>in</sub>     |     | V <sub>DDB</sub> =24V | 300            |        |       | Kohm | -    |
| 11 | LED lifetime                                  | LTLED               |     | -                     | 50,000         | 60,000 |       | Hr   | 6    |

Note 1: Dimming ratio= 100%, ( Ta=25±5°C, Turn on for 45minutes )

Note 2: MAX input current while DB turn on, measurement condition V<sub>DDB</sub> rising time=20ms(V<sub>DDB</sub>: 10%~90%)

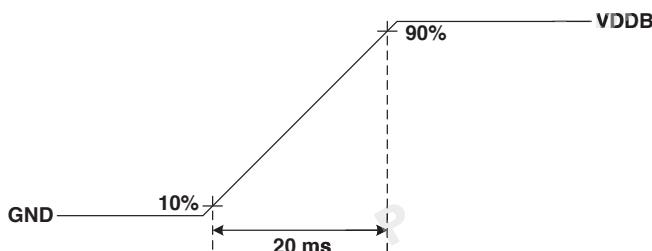

Note 3: When BLU off ( V<sub>DDB</sub> = 24V , VBLON = 0V ) , I<sub>DDB</sub> (max) = 0.1A

Note 4: Less than 5% dimming control is functional well and no backlight shutdown happened

Note 5: Normal: 0~0.8V ; Abnormal : Open collector

Note 6: The lifetime (MTTF) is defined as the time which luminance of LED is 50% compared to its original value.

[Operating condition: Continuous operating at Ta = 25±2°C , for single LED only]

## 6.2 Input Pin Assignment

LED DB connector: CI0114M1HRL-NH(CviLux) or equivalent

CI0112M1HRL-NH(CviLux) or equivalent

| Pin | Symbol | Description                | Note |
|-----|--------|----------------------------|------|
| 1   | VDDB   | Power Supply Input Voltage |      |
| 2   | VDDB   | Power Supply Input Voltage |      |
| 3   | VDDB   | Power Supply Input Voltage |      |
| 4   | VDDB   | Power Supply Input Voltage |      |
| 5   | VDDB   | Power Supply Input Voltage |      |
| 6   | GND    | Ground                     |      |
| 7   | GND    | Ground                     |      |
| 8   | GND    | Ground                     |      |
| 9   | GND    | Ground                     |      |
| 10  | GND    | Ground                     |      |
| 11  | DET    | BLU status detection:      | 1    |
| 12  | VBLON  | BLU On-Off control:        | 2,3  |
| 13  | NC     | NC                         | 4    |
| 14  | PDIM   | External PWM               | 2, 5 |

| Pin | Symbol | Description                | Note |
|-----|--------|----------------------------|------|
| 1   | VDDB   | Power Supply Input Voltage |      |
| 2   | VDDB   | Power Supply Input Voltage |      |
| 3   | VDDB   | Power Supply Input Voltage |      |
| 4   | VDDB   | Power Supply Input Voltage |      |
| 5   | VDDB   | Power Supply Input Voltage |      |
| 6   | GND    | Ground                     |      |
| 7   | GND    | Ground                     |      |
| 8   | GND    | Ground                     |      |
| 9   | GND    | Ground                     |      |
| 10  | GND    | Ground                     |      |
| 11  | NC     | NC                         | 4    |
| 12  | NC     | NC                         | 4    |

**Note1. DET status**

| DET            | BLU status |
|----------------|------------|
| 0 ~ 0.8V       | Normal     |
| Open collector | Abnormal   |

Recommend pull high R > 10K ohm, pull high voltage VDD = 3.3V

**Note2. input control signal threshold voltage definition**

| Item                         | Symbol | Min. | Typ. | Max. | Unit |
|------------------------------|--------|------|------|------|------|
| Input High Threshold Voltage | VIH    | 2    | -    | 5.5  | V    |
| Input Low Threshold Voltage  | VIL    | 0    | -    | 0.8  | V    |

**Note3. VBLON**

Mode selection

| VBLON     | Note   |
|-----------|--------|
| H or OPEN | BL On  |
| L         | BL Off |

**Note4. Please leave this pin unoccupied. It cannot be connected by any signal (Low/GND/High).**

**Note5. PDIM**



PWM Dimming range:



IF External PWM function less than 5% dimming ratio, Judge condition as below:

- (1)Backlight module must be lighted ON normally.
- (2)All protection function must work normally.
- (3)Uniformity and flicker could not be guaranteed

### 6.3 Power Sequence for Backlight

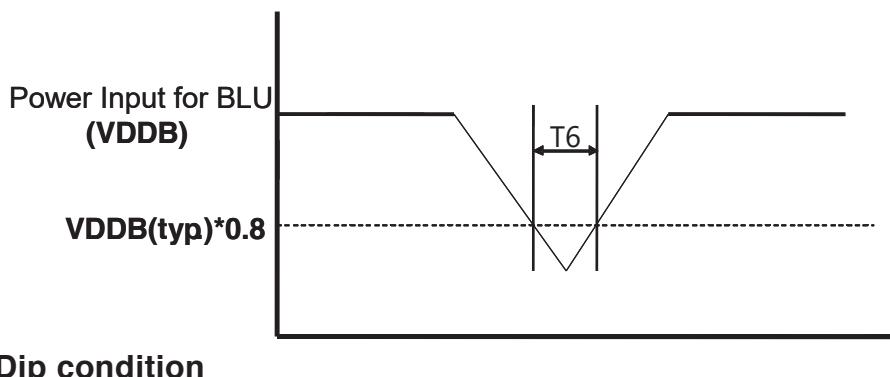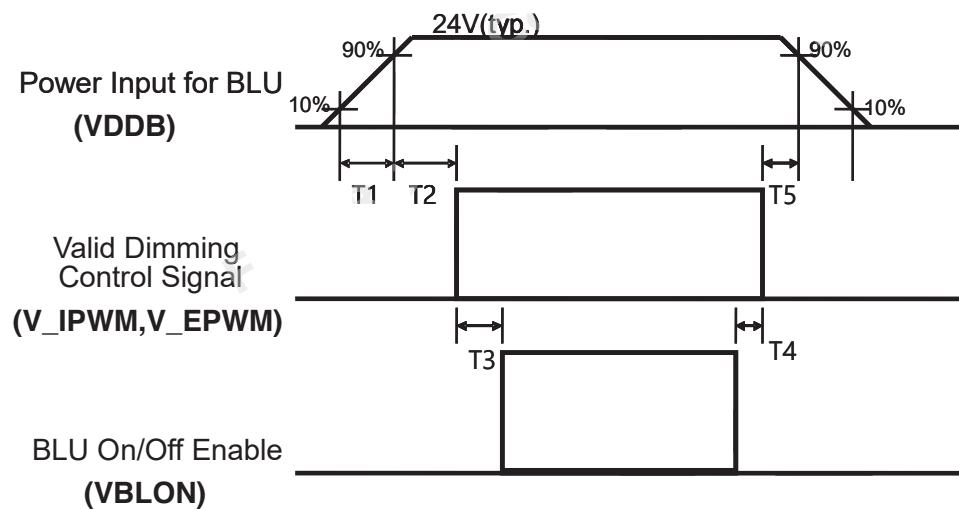

| Parameter | Min  | Typ | Max  | Units |
|-----------|------|-----|------|-------|
| T1        | 20   | -   | -    | ms *1 |
| T2        | 250  | -   | -    | ms    |
| T3        | 2200 |     |      | ms    |
| T4        | 0    | -   | -    | ms    |
| T5        | 0    | -   | -    | ms    |
| T6        |      | -   | 1000 | ms *2 |


Note:1. T6 describes VDDB dip condition and VDDB couldn't lower than 10% VDDB.

## 7. Mechanical Characteristics


The contents provide general mechanical characteristics for the model P850QVN02.1. In addition the figures in the next page are detailed mechanical drawing of the LCD.


| Item              | Dimension    | Unit   | Note                          |
|-------------------|--------------|--------|-------------------------------|
| Outline Dimension | Horizontal   | 1910.0 | mm                            |
|                   | Vertical     | 1091.0 | mm                            |
|                   | Depth (Dmin) | 61.4   | mm<br>front bezel to DB Cover |
|                   | Depth (Dmax) | 69.7   | mm<br>to wall mount           |
| Weight            | 34           | Kg     |                               |

## Front View

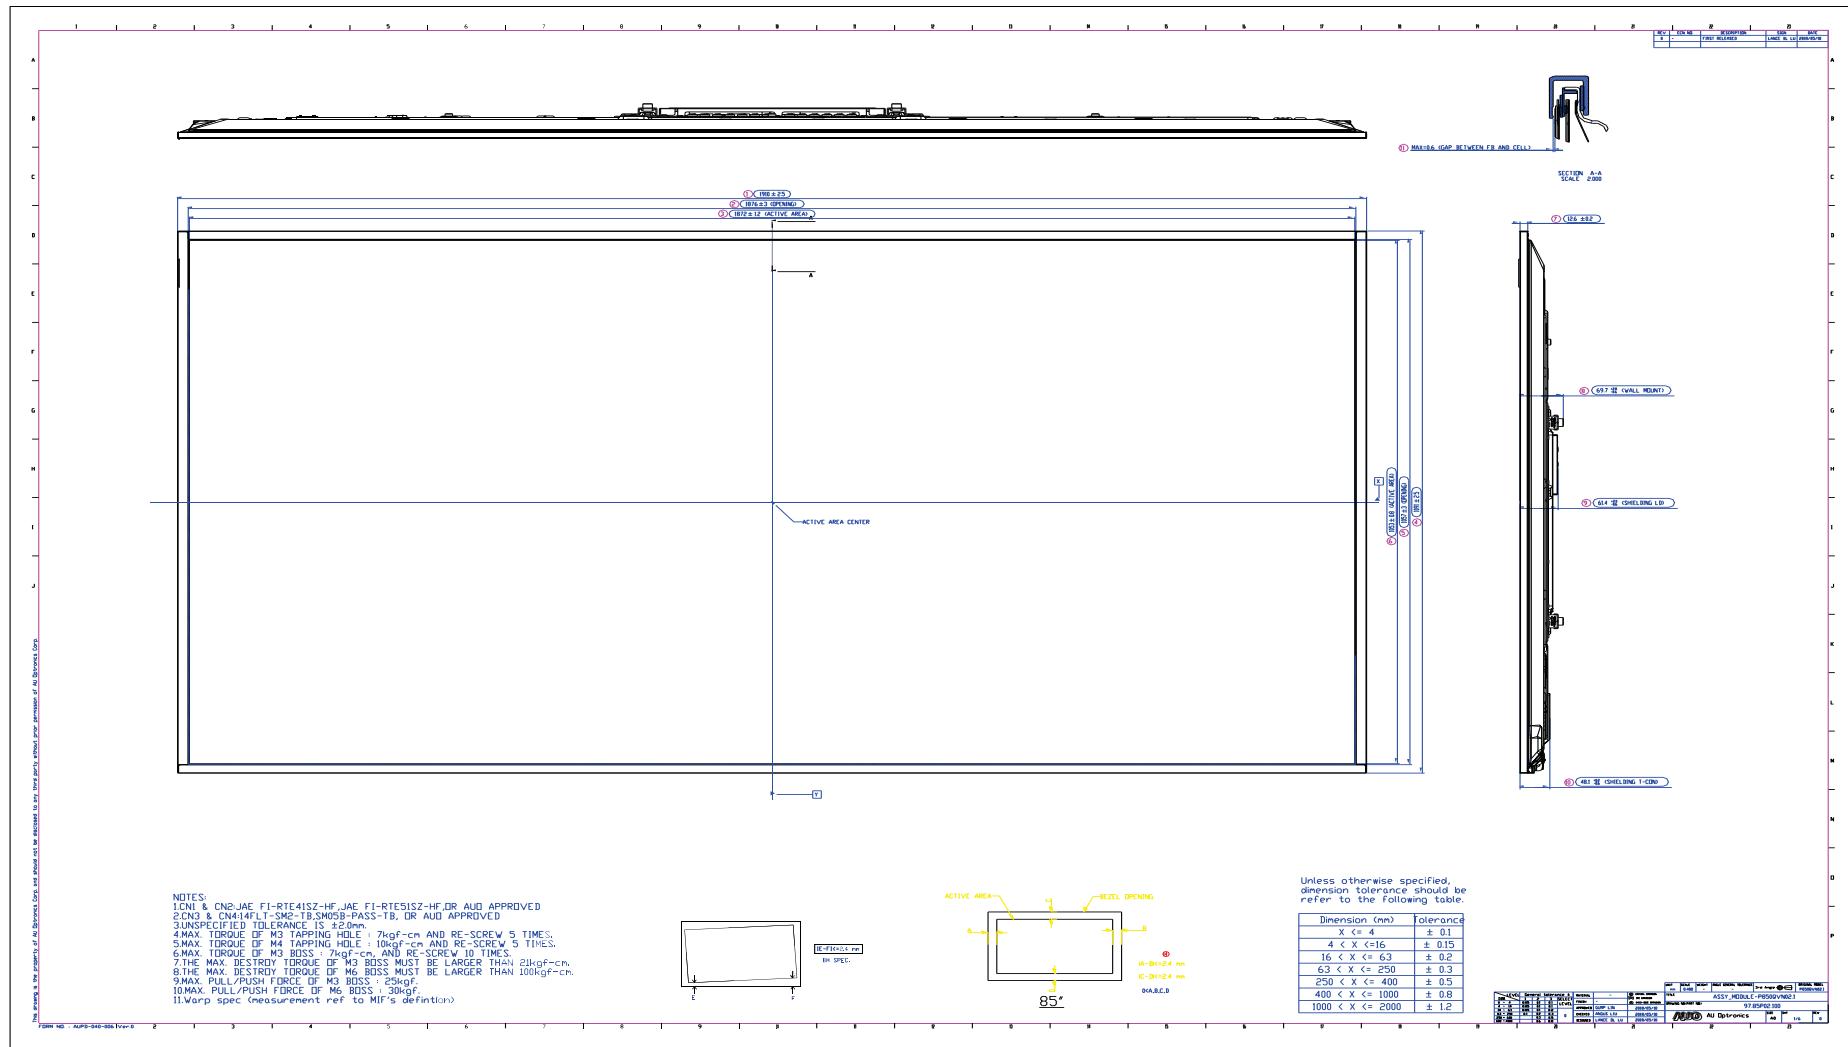

## Back View

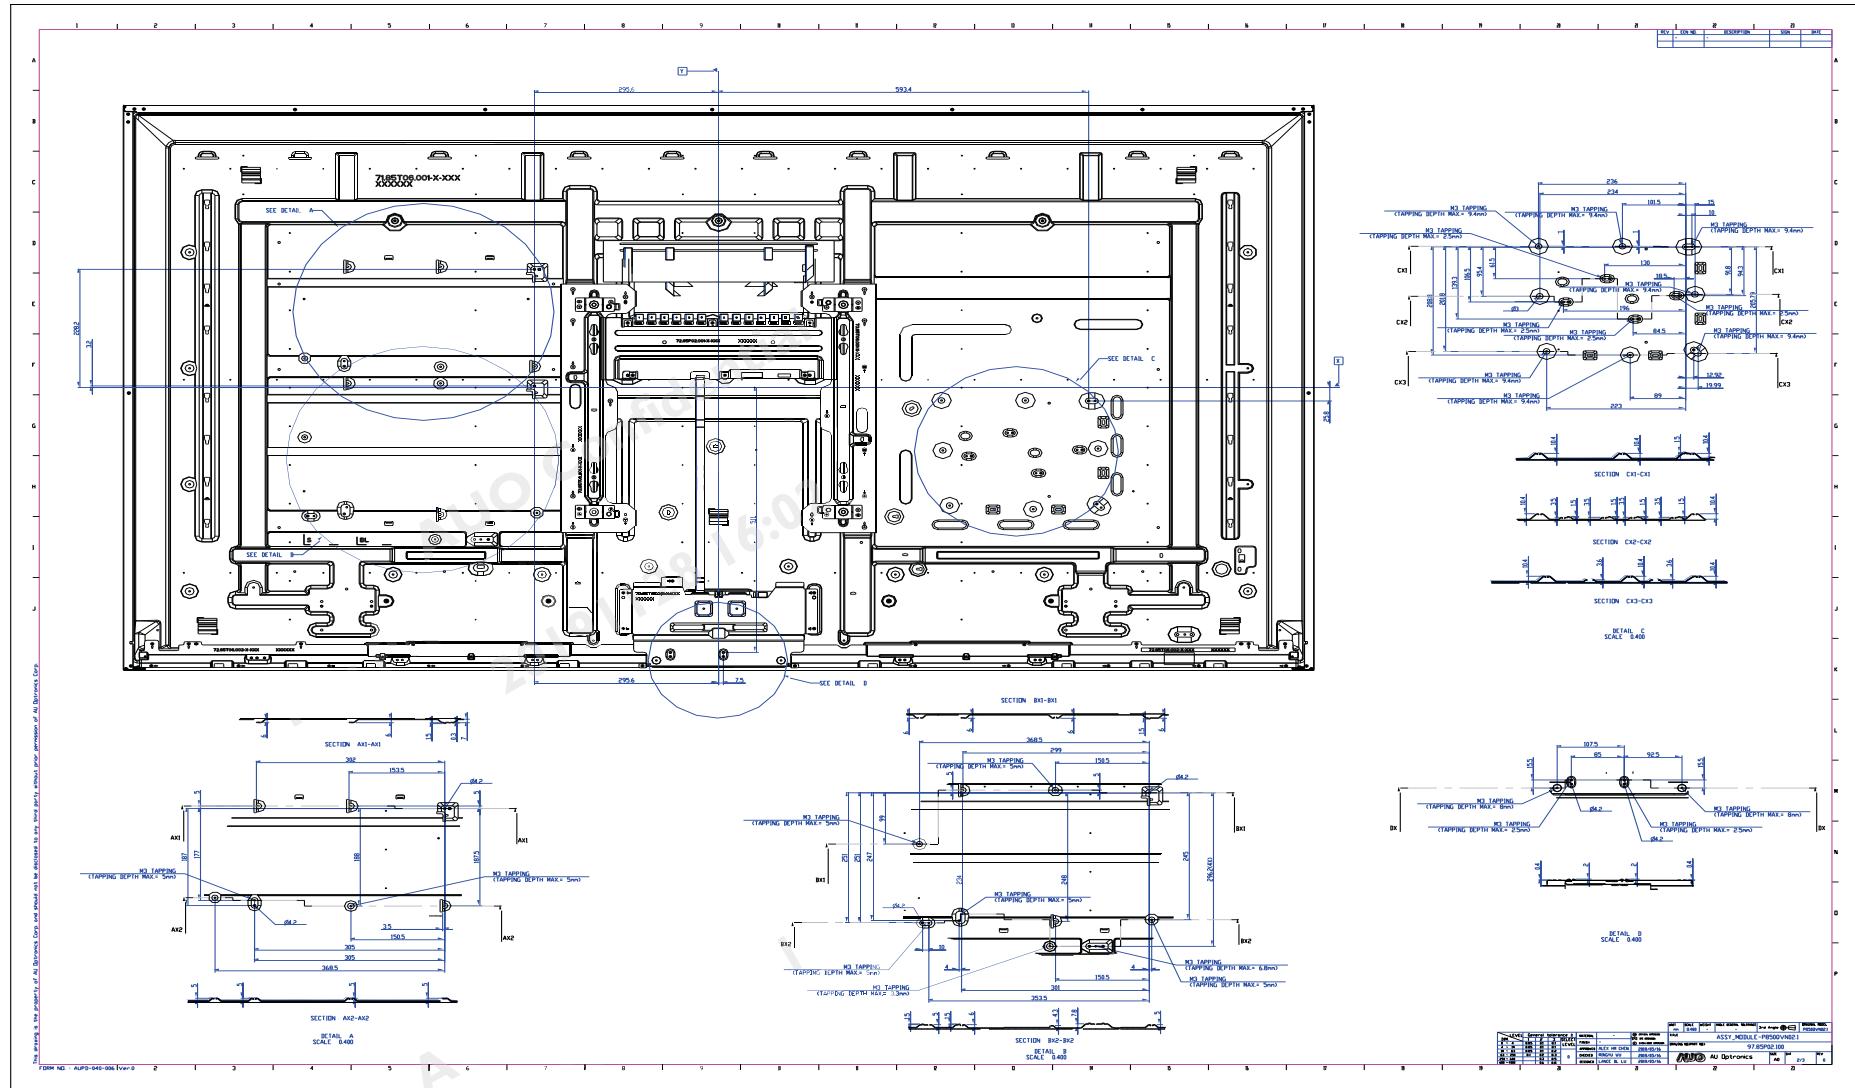

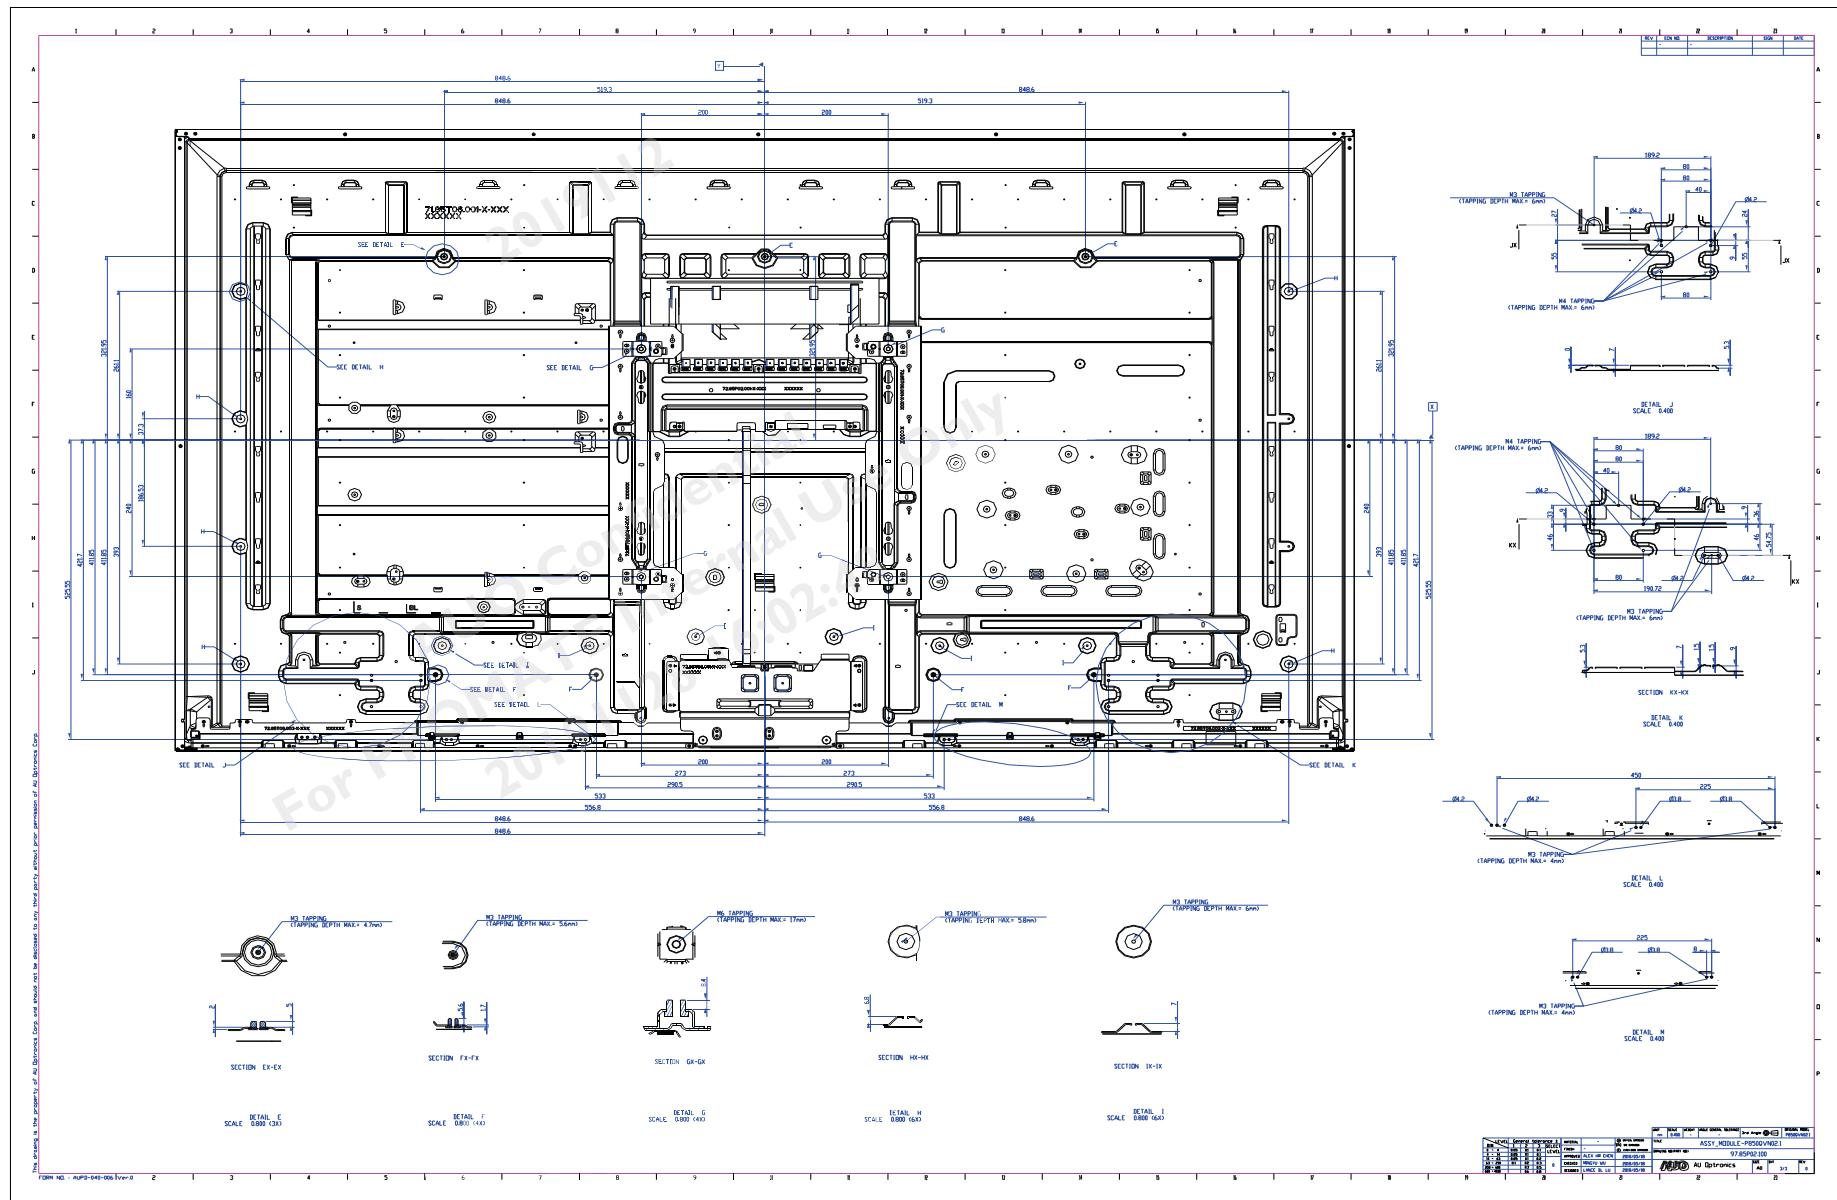

## 8. Reliability Test Items

|   | Test Item                       | Q'ty    | Condition   |
|---|---------------------------------|---------|---|
| 1 | High temperature storage test   | 3       | 60°C, 500hrs  |
| 2 | Low temperature storage test    | 3       | -20°C, 500hrs   |
| 3 | High temperature operation test | 3       | 50°C, 500hrs  |
| 4 | Low temperature operation test  | 3       | -5°C, 500hrs  |
| 5 | Vibration test (With carton)    | 1( PKG) | Random wave (1.04Grms 2~200Hz)<br>Duration : X,Y,Z 20min per axes     |
| 6 | Drop test (With carton)         | 1( PKG) | Height: 25.4 cm<br>Direction: Only bottom flat twice<br>(ASTMD4169-I) |

## 9. International Standard

### **9.1 Safety**

- (1) UL 60950-1; Standard for Safety of Information Technology Equipment Including electrical Business Equipment.
- (2) IEC 60950-1; Standard for Safety of International Electrotechnical Commission
- (3) EN 60950-1; European Committee for Electrotechnical Standardization (CENELEC), EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.


### **9.2 EMC**

- (1) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz." American National standards Institute(ANSI), 1992
- (2) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special committee on Radio Interference.
- (3) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization. (CENELEC), 1998

## 10. Packing

### 10.1 Definition of Label

#### A. Panel Label:

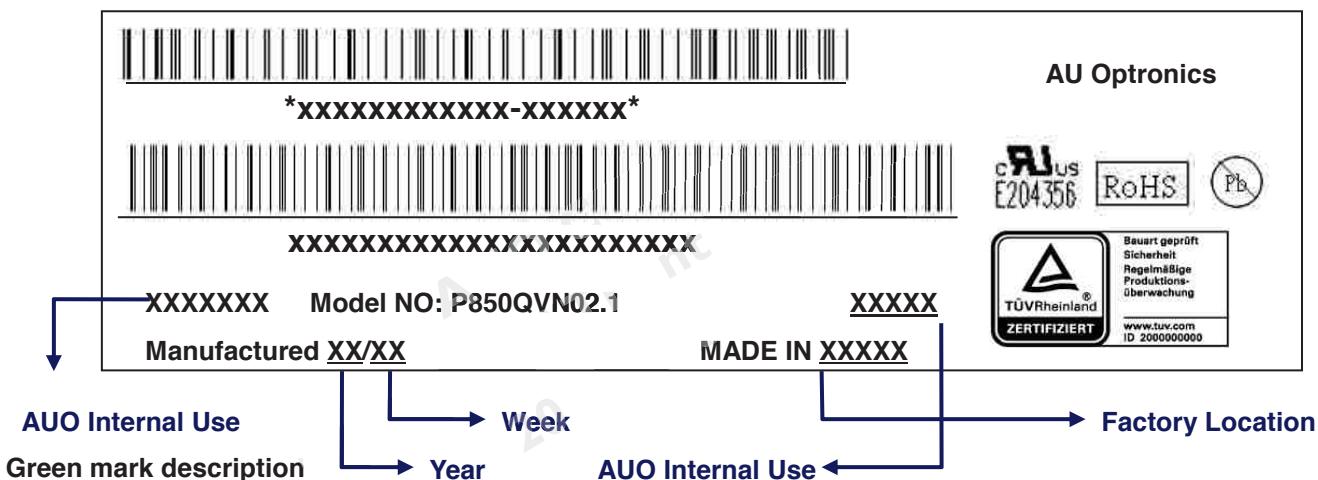


(1) For Pb Free Product, AUO will add  for identification.


(2) For RoHs compatible products, AUO will add  for identification.

Note: The green Mark will be present only when the green documents have been ready by AUO internal green team. (definition of green design follows the AUO green design checklist.)

#### B. Carton Label:

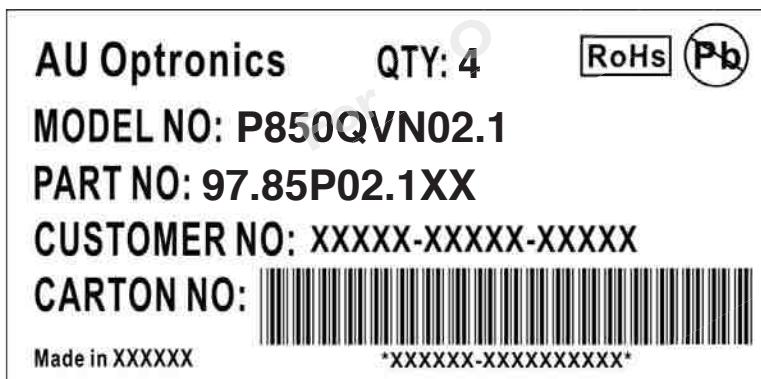


## 10.2 Packing Methods

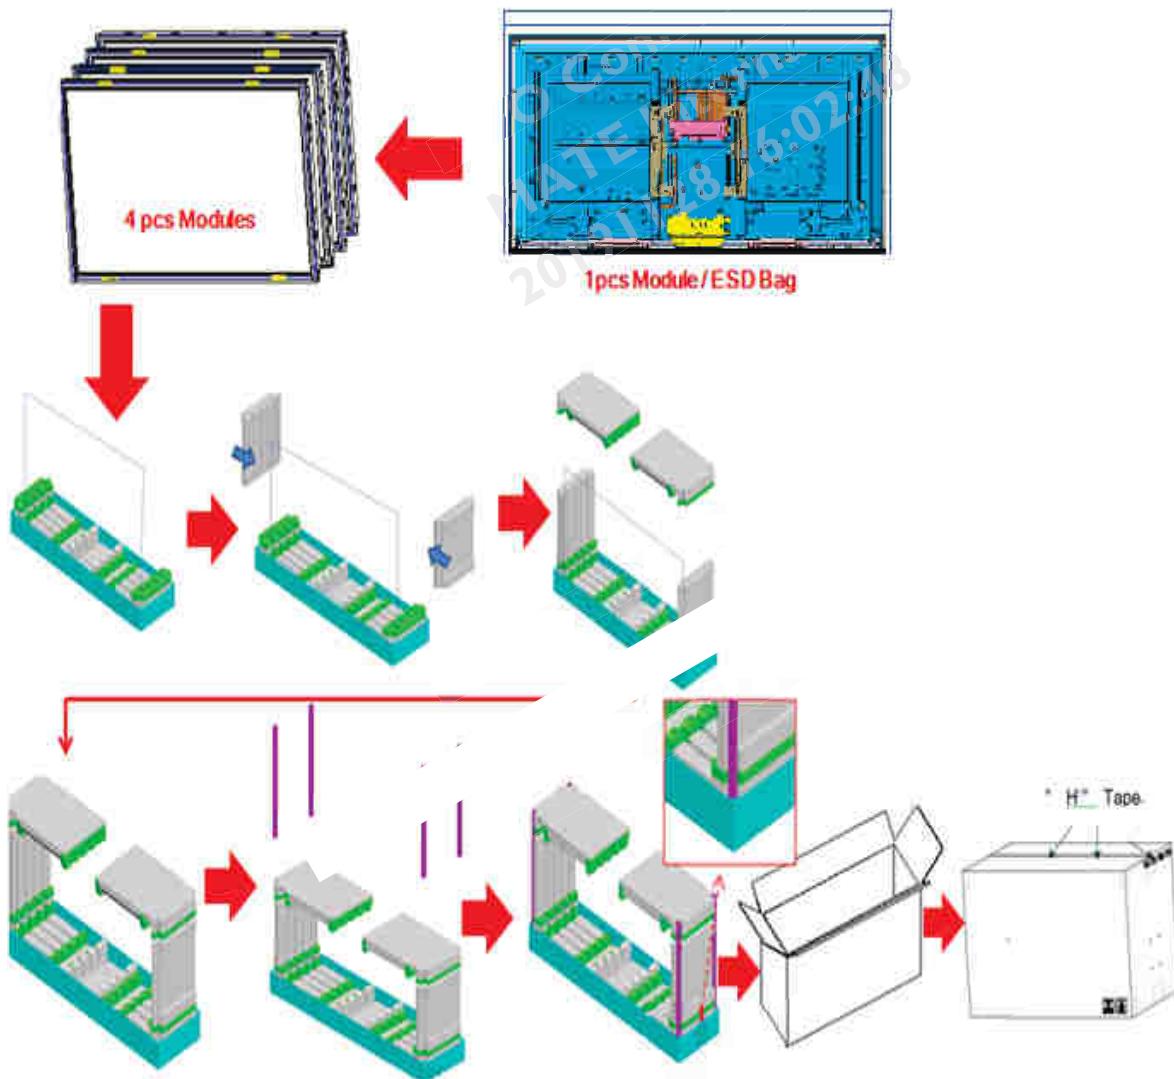

### 10.3 Pallet and Shipment Information

| Item                      | Specification                                     |   |                                  | Packing Remark |
|---------------------------|---|---|----------------------------------|----------------|
|                           | Qty.  | Dimension   | Weight (kg)                      |                |
| 1 Packing Box             | 4pcs/box  | 2073(L)mm*560 (W)mm*1257(H)mm                                   | 158.04                           | Panel 34.0kg   |
| 2 Pallet                  | 1   | 2150(L)mm*1180(W)mm*150(H)mm                                    | 46                               |                |
| 3 Boxes per Pallet        | 2 boxes/Pallet (By Air) ; 2 Boxes/Pallet (By Sea) |   |                                  |                |
| 4 Panels per Pallet       | 8 pcs/pallet(By Air) ; 8 pcs/Pallet (By Sea)      |   |                                  |                |
| 5 Pallet<br>after packing | 8(by Air)<br>8 (by Sea)                           | 2150(L)mm*1180(W)mm*1407 (H)mm<br>2150(L)mm*1180(W)mm*1407(H)mm | 362.08(by Air)<br>362.08(by Sea) |                |

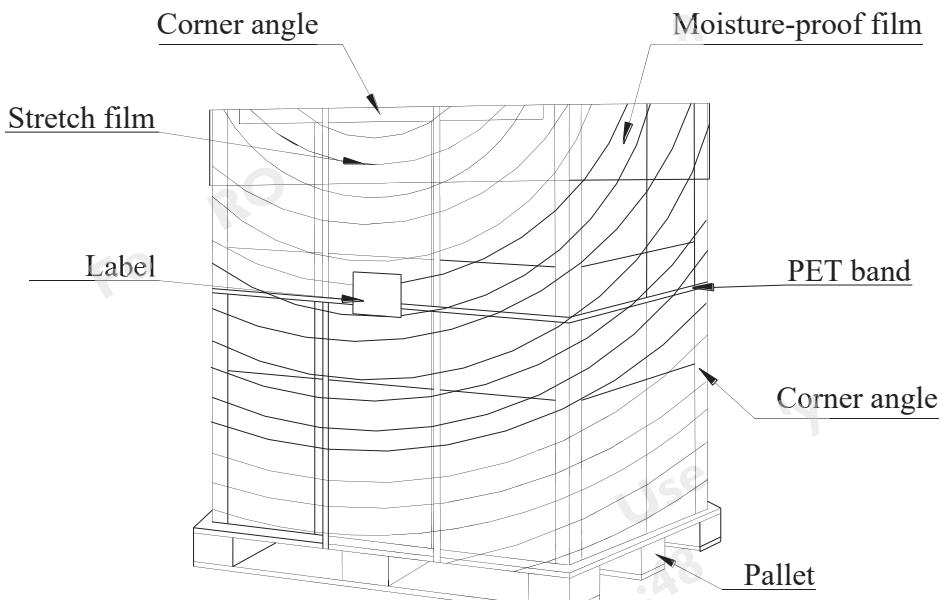

## **11. Precautions**

Please pay attention to the followings when you use this TFT LCD module.

### **11.1. Mounting Precautions**

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter cause circuit broken by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizer with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front/ rear polarizer. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

### **11.2. Operating Precautions**

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage:  $V=\pm 200mV$  (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it may become lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic

interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interface.

- (7) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

### **11.3. Operating Condition for Public Information Display**

The device listed in the product specification is designed and manufactured for PID (Public Information Display) application. To optimize module's lifetime and function, below operating usages are required.

**(1) Normal operating condition**

- A. Operating temperature: 0~50°C
- B. Operating humidity: 10~90%
- C. Display pattern: dynamic pattern (Real display).

Note) Long-term static display would cause image sticking.

**(2) Operation usage to protect against image sticking due to long-term static display.**

- A. Suitable operating time: under 24 hours a day
  - (\* The moving picture can be allowed for 24 hours a day)
- B. Liquid Crystal refresh time is required. Cycling display between 5 minutes' information (static) display and 10 seconds' moving image.
- C. Periodically change background and character (image) color.
- D. Avoid combination of background and character with large different luminance.

**(3) Periodically adopt one of the following actions after long time display.**

- A. Running the screen saver (motion picture or black pattern)
- B. Power off the system for a while

**(4) LCD system is required to place in well-ventilated environment. Adapting active cooling system is highly recommended.**

**(5) Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions, such as high temperature/humidity, display stationary patterns, or long operation time etc..., it is strongly recommended to contact AUO for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.**

### **11.4. Electrostatic Discharge Control**

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.

## **11.5. Precautions for Strong Light Exposure**

- (1) Strong light exposure causes degradation of polarizer and color filter.
- (2) To keep display function well as a digital signage application, especially the component of TFT is very sensitive to sunlight, it is necessary to set up blocking device protecting panel from radiation of ambient environment.

## **11.6. Storage**

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

## **11.7. Handling Precautions for Protection Film**

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

## **11.8. Dust Resistance**

- (1) AUO module dust test is conducted with marked holes (see Figure 1) sealed to comply with JIS D0207 .
- (2) Module users should design set with these holes used/sealed(if not used) or covered by set mechanism to prevent dust from entering(see Figure 2). The AUO testing procedure cannot replicate all different real world scenarios, module users should apply set dust resistance solution to meet users' requirement.



- M3 BURRING TAP 43 PCS
- M4 BURRING TAP 10 PCS
- [■] M6 BURRING TAP 4PCS

Figure 1

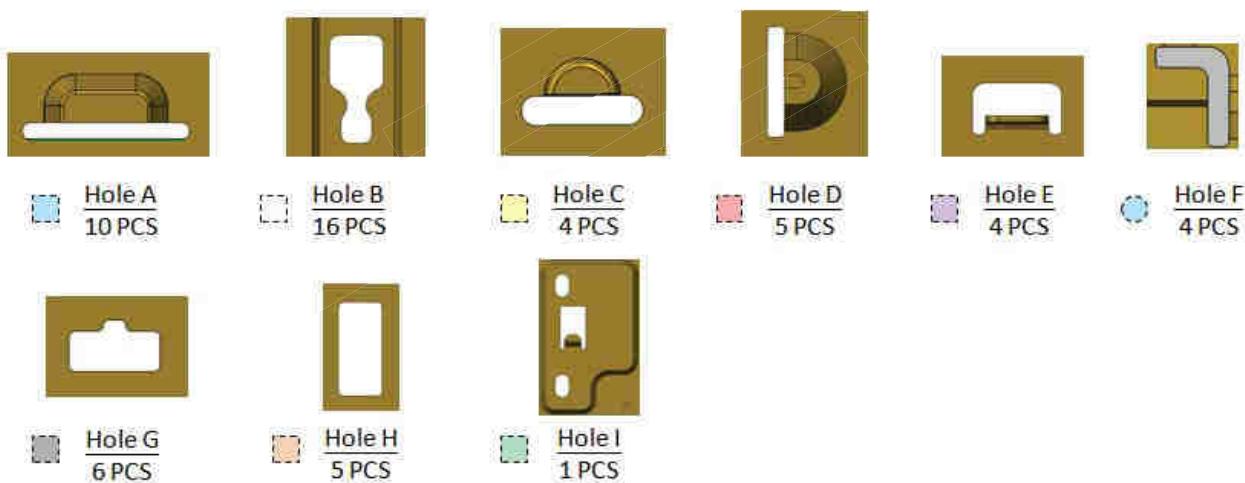
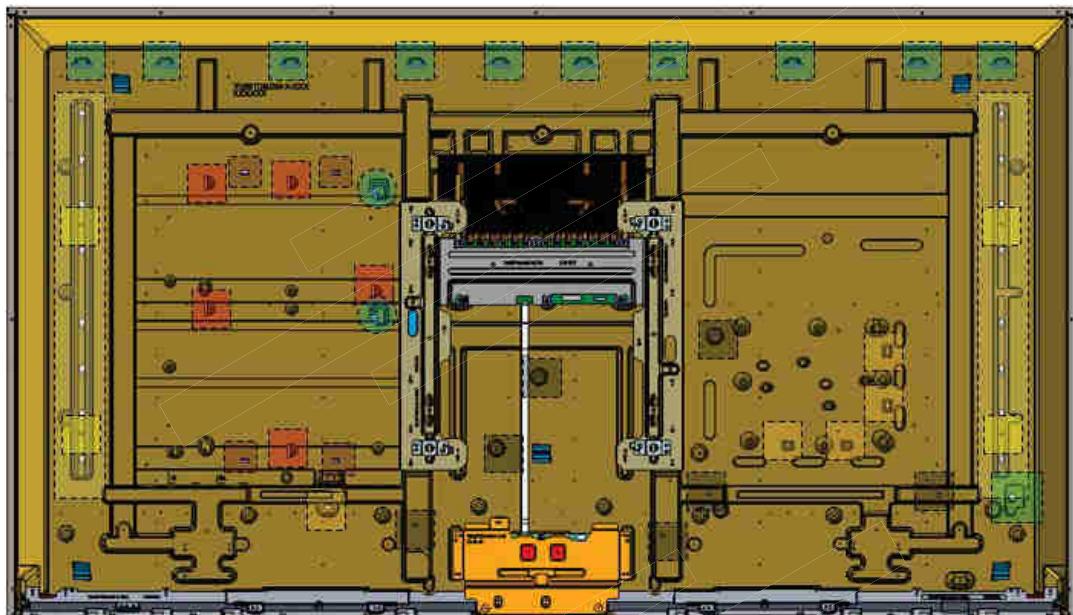


Figure 2