



# CLUX-3D12S1A

1 × 2 HDMI Splitter with 3D Audio to Amplifier



## Operation Manual

Vertrieb durch  
Distribution by

**HY-LINE**<sup>®</sup>  
COMPUTER COMPONENTS

Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)

Vertrieb durch  
Distribution by **HY-LINE®**  
COMPUTER COMPONENTS  
Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)

## DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

## COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.1 August 2011

## TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

---

Vertrieb durch  
Distribution by

**HY-LINE**<sup>®</sup>  
COMPUTER COMPONENTS

Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)



## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
VS1	23/02/12	First Release
VR2	02/04/12	Add HDMI Cable Distance

Vertrieb durch  
Distribution by

**HY-LINE**<sup>®</sup>  
COMPUTER COMPONENTS  
Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
www.hy-line.de

## CONTENTS

<b>1. Introduction</b> .....	<b>1</b>
<b>2. Applications</b> .....	<b>1</b>
<b>3. Package Contents</b> .....	<b>1</b>
<b>4. System Requirements</b> .....	<b>1</b>
<b>5. Features</b> .....	<b>2</b>
<b>6. Operation Controls and Functions</b> .....	<b>3</b>
6.1 Front Panel.....	3
6.2 Rear Panel.....	4
<b>7. Connection Diagram</b> .....	<b>5</b>
<b>8. Specifications</b> .....	<b>6</b>
<b>9. Acronyms</b> .....	<b>7</b>

---

Vertrieb durch  
Distribution by

**HY-LINE**<sup>®</sup>  
COMPUTER COMPONENTS

Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)



## 1. INTRODUCTION

The 1 x 2 HDMI Splitter with audio is fully compliant with HDMI and allows the output from any HDMI equipped device to be split and allow connection to up to two HDTV displays e.g. an LCD TV and a projector in the same room. The third HDMI output is an audio with blue screen output, which means it can be connected to an AV Receiver that does not support 3D signal.

## 2. APPLICATIONS

- Showroom environment
- Education demo
- Installation usage
- Home entertainment

## 3. PACKAGE CONTENTS

- 1 x 2 HDMI Splitter with audio
- 5V/1 A DC power supply adaptor
- Operation Manual

## 4. SYSTEM REQUIREMENTS

Input source equipment with HDMI outputs and HDMI equipped displays and/or AV Receivers.


## 5. FEATURES

- HDMI, HDCP1.1 and DVI 1.0 compliant Receiver
- Deep Color video up to 12-bit, 1080p@24/60Hz
- One HDMI source to connect up to two HDMI displays simultaneously
- One audio-only HDMI output connected to AVR
- Splits a HDMI source to two outputs without signal loss
- Supports DVI source and DVI display by using HDMI to/from DVI adaptor cable
- Supports LPCM 7.1CH, Dolby Digital and Dolby Digital Plus Audio transmission (32–192 kHz Fs sample rate)
- Supports a wide range of PC and HDTV resolutions from VGA to WUXGA and 480i to 1080p
- HDMI cable distance test with 1080p/8-bit or 12-bit resolution, the Input/Output distance can run up to 15 meters
- Supports EDID functionality. This device will detect the video's EDID information based on HDMI OUT 1 and the audio's EDID based on HDMI OUT 3.

**Note:** *If both HDMI OUT 1 & HDMI OUT 2 are connected and HDMI OUT 1 is unplugged, the device will retain the EDID information for that device.*

## 6. OPERATION CONTROLS AND FUNCTIONS

### 6.1 Front Panel

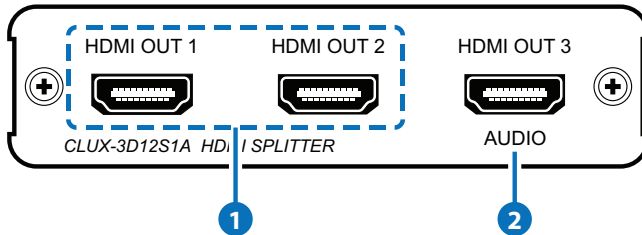

#### 1 HDMI OUT 1 & 2

Connect each of the output ports to a HDMI equipped video display such as TV or projector. HDMI OUT 1 is the master video port and the device will send the video content according to that connected display's EDID information. If more than one output is connected, both HDMI OUT 1 and HDMI OUT 2 output identical video signals simultaneously based on the EDID information of the display connected to HDMI OUT 1.

#### 2 HDMI OUT 3


Connect the HDMI audio output port to the AV Receiver. HDMI OUT 3 is the master audio port and the device will send the audio content according to the connected device's EDID information to all HDMI outputs. Meanwhile, the display will show a blank BLUE screen.

**Note:** A master port will replicate the highest resolution settings of the connected device. Any device connected to a non-master port that does not meet the master device's EDID settings there may be no output from that port. For example, when the device connected to HDMI OUT 3 supports 7.1CH audio but OUT 1 & 2 supports only 2CH, then there will be no audio output from the HDMI OUT 1 and HDMI OUT 2 ports.

Similarly, when a 3D capable display is connected to HDMI OUT 1 and a non-3D capable display is connected to HDMI OUT 2 there may be no video displayed on the device connected to HDMI OUT 2 when 3D video is playing.



## 6.2 Rear Panel

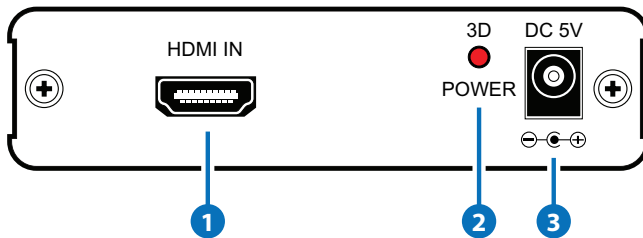

### 1 HDMI IN

Connect the HDMI or DVI output of your source equipment such as 3D Blu-ray player or set-top box.


### 2 POWER/3D INDICATOR

When the system is ON the RED LED will illuminate when the system detects a 3D formatted video signal the GREEN LED will illuminate.

### 3 DC POWER JACK

Plug the DC 5V power supply into the splitter and connect the adaptor to AC wall outlet.

## 7. CONNECTION DIAGRAM

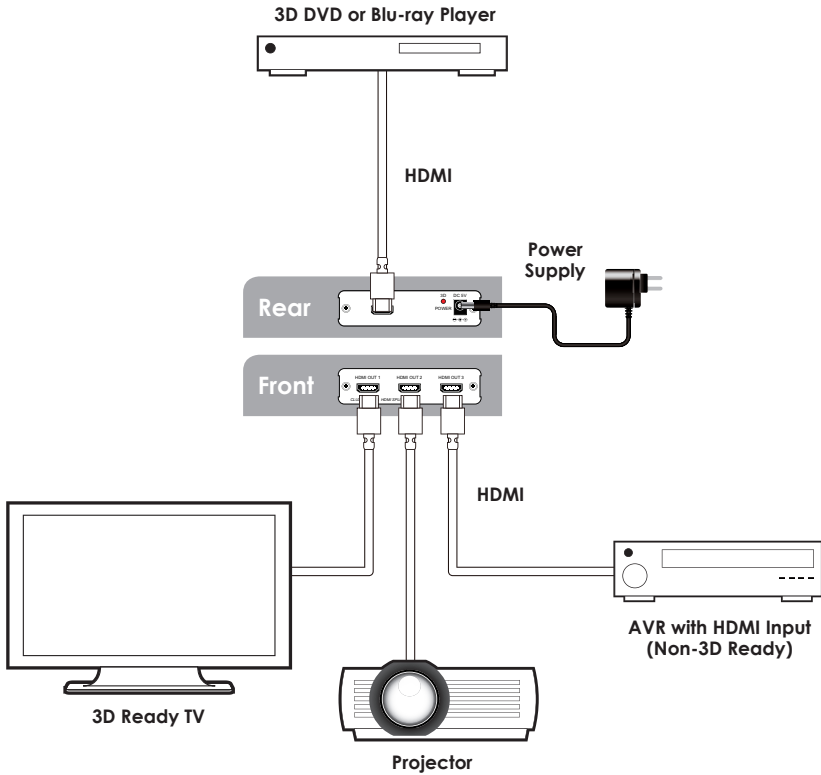

In this example, when the input signal is of 3D format, only HDMI OUT 1 will have picture, while HDMI OUT 2 won't because the projector is non 3D-ready. When the input signal is of 2D format, both HDMI output port 1 and 2 will have picture.

## 8. SPECIFICATIONS

<b>Input Port</b>	1×HDMI
<b>Output Port</b>	2×HDMI 1×HDMI (For audio only with Blue Screen)
<b>Input Resolution</b>	480i ~1080p 50/60, VGA~WUXGA
<b>Output Resolution</b>	480i ~1080p 50/60, VGA~WUXGA
<b>HDMI Cable In/Out Distance</b>	Up to 15M with 8 or 12 bits
<b>Audio output</b>	Up to 192kHz
<b>ESD Protection</b>	Human Body model: ±8kV (air-gap discharge) ±4kV (contact discharge)
<b>Power Supply</b>	5V DC/1A (US/EU standards, CE/FCC/UL certified)
<b>Dimensions</b>	100mm (W)×147mm (D)×25mm (H)
<b>Weight</b>	300g
<b>Chassis Material</b>	Aluminum
<b>Silkscreen Color</b>	Black
<b>Operating Temperature</b>	0 °C~40 °C/32 °F~104 °F
<b>Storage temperature</b>	-20 °C~60 °C/-4 °F~140 °F
<b>Relative Humidity</b>	20~90 % RH (no condensation)
<b>Power Consumption</b>	4.1 W(Max)

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>HDMI</b>	High Definition Multimedia Interface
<b>AVR</b>	Audio Video Receiver

Vertrieb durch  
Distribution by **HY-LINE®**  
COMPUTER COMPONENTS  
Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)

Vertrieb durch  
Distribution by **HY-LINE**<sup>®</sup>  
COMPUTER COMPONENTS  
Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)

Vertrieb durch  
Distribution by **HY-LINE®**  
COMPUTER COMPONENTS  
Inselkammerstr. 10  
D-82008 Unterhaching  
Tel.: +49 89 614 503 40  
[www.hy-line.de](http://www.hy-line.de)



**CYPRESS TECHNOLOGY CO., LTD**

Home page: <http://www.cypress.com.tw>