

TFT-DISPLAY DATASHEET

AUO
Model: A035QN05 V1

BRIEF SPEC.:

Main Feature

Landscape Type

White LED Backlight

Active Screen Area	70.32 x 52.74 [mm]
Diagonal Format	3,5" 4:3
Resolution	320 x 240
Colors	16.7M (8-bit)
Backlight	LED, White
Brightness	300 cd/m ²
LED Life Time	N/A
Interface	RGB
Viewing Angle	-60~60H), -50~55(V)
Touchscreen	No
Power Supply	3.3V [Typ.]
Module Outline	76.9 x 63.9 x 3.12 [mm]
Operation Temperature	-10... +70 °C
Storage Temperature	-40... +80 °C
Surface Treatment	Antiglare Hard Coating



Doc. version :	0.4
Total pages :	39
Date :	2011/05/06

Product Specification 3.5" COLOR TFT-LCD MODULE

Model Name : A035QN05 V1

Planned Lifetime:

Phase-out Control:

EOL Schedule:

< >Preliminary Specification
< >Final Specification

Note: The content of this specification is subject to change.

© 2013 AU Optronics
All Rights Reserved,
Do Not Copy.

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

Record of Revision

Version	Revise Date	Page	Content
0.0	2010/12/15		1 st release
0.1	2011/01/20	6	modify Dot pitch unit : (mm)
		27	Update Chromaticity spec
		29	Update Low Temperature Operation -10℃
0.2	2011/4/14	6	Update General Information format
0.3	2011/4/28	6	Modify pixel pitch unit: mm→ μ m
		7,8	Add I/O Structure

Contents

A. General Information	6
B. Electrical Specifications	7
1. Pin Assignment	7
2. Absolute Maximum Ratings	9
3. Electrical Characteristics	10
a. TFT- LCD Panel (GND=0V)	10
b. Backlight driving conditions	10
4. AC Timing	11
a. Display General Information	11
b. 8-bit Serial Interface	12
c. YUV Interface	14
d. SPI Timing Diagram	16
e. SPI Timing Specification	17
5. Command Register Settings	18
a. Serial setting map	18
b. Description of serial control data	19
I. R0 Register	19
II. R1 Register	20
III. R2 Register	21
IV. R3 Register	21
V. R4 Register	22
VI. R5 Register	22
VII. R6 Register	23
VIII. R7 Register	23
IX. R8 Register	24
X. R9 Register	25
XI. R10 Register	25
XII. R11~14 Register	26
C. Optical Specification (Note1, Note 2 and Note 3)	27
D. Reliability Test Items	30
E. Packing Form	32
F. Outline dimension	33
G. Application note	34
1. Recommended Register Settings	34
a. 8-bit Serial Interface HV Sync. Mode without Dummy	34
b. 8-bit Serial Interface HV Sync. Mode with Dummy	35
c. YUV640 Mode	36
d. YUV720 Mode	37
2. Power on/off sequence	38
e. Power on (Standby Disabling)	38
f. Power off (Standby Enabling)	38



3. Suggested Circuit	39
4. Input Data Timing	40

A. General Information

NO.	Item	Unit	Specification	Remark
1	Screen Size	inch	3.5(Diagonal)	
2	Display Resolution	dot	320RGB(H)×240(V)	
3	Overall Dimension	mm	76.90(H) × 63.90(V) × 2.92(T)	Note 1
4	Active Area	mm	70.32(H)×52.74(V)	
5	Pixel Pitch	μm	73.25(R.G.B)×219.75(V)	
6	Color Configuration	--	R. G. B. Stripe	
7	Color Depth	--	16.7M Colors	
8	NTSC Ratio	%	45	
9	Display Mode	--	Normally White	
10	Weight	--	30.8	
11	Viewing direction	--	6 o'clock (gray inversion)	
12	Panel surface treatment	--	Hard Coating	

Note 1: Refer to F. Outline Dimension

B. Electrical Specifications

1. Pin Assignment





No.	Pin Name	I/O	I/O Structure	Description	Remarks
1	VLED+	P		Backlight LED anode	
2	VLED-	P		Backlight LED cathode	
3	Dummy	I/O		Touch panel right electrode (R)	Reserve for TP
4	Dummy	I/O		Touch panel bottom electrode (B)	Reserve for TP
5	Dummy	I/O		Touch panel left electrode (L)	Reserve for TP
6	Dummy	I/O		Touch panel top electrode (U)	Reserve for TP
7	VCOM	I		Common electrode driving voltage	
8	GND	G		Power Grounding	
9	DOTCLK	I	Type1	Data clock Input	
10	GND	G		Power Grounding	
11	VSYNC	I	Type1	Vertical sync input	
12	HSYNC	I	Type1	Horizontal sync input	
13	DATA0	I	Type1	Serial data	
14	DATA 1	I	Type1	Serial data	
15	DATA 2	I	Type1	Serial data	
16	DATA 3	I	Type1	Serial data	
17	DATA 4	I	Type1	Serial data	
18	DATA 5	I	Type1	Serial data	
19	DATA 6	I	Type1	Serial data	
20	DATA 7	I	Type1	Serial data (MSB)	
21	VDDIO	P		Voltage input pin for logic I/O	
22	RESET	I	Type3	System reset pin	Fixed to VDDIO if not used.
23	SCL	I	Type3	Clock input pin in serial mode	
24	CSB	I	Type3	Chip select pin of serial interface	
25	SDA	I	Type2	Data input pin in serial mode	
26	GND	G		Power Grounding	
27	VDD	P		Booster input voltage pin	
28	VCC	C		Stabilizing capacitor	
29	C4M	C		Pins to connect capacitance for power circuitry	
30	C4P	C		Pins to connect capacitance for power circuitry	
31	VINT3	C		Intermediate voltage for charge pump	

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

32	VDD	P	Booster input voltage pin	
33	VINT1	C	Intermediate voltage for charge pump	
34	C2P	C	Pins to connect capacitance for power circuitry	
35	C2M	C	Pins to connect capacitance for power circuitry	
36	C1P	C	Pins to connect capacitance for power circuitry	
37	C1M	C	Pins to connect capacitance for power circuitry	
38	GND	G	Power Grounding	
39	C3P	C	Pins to connect capacitance for power circuitry	
40	C3M	C	Pins to connect capacitance for power circuitry	
41	VINT2	C	Intermediate voltage for charge pump	
42	C5P	C	Pins to connect capacitance for power circuitry	
43	C5M	C	Pins to connect capacitance for power circuitry	
44	VGH	C	Pins to connect capacitance for power circuitry	
45	C6P	C	Pins to connect capacitance for power circuitry	
46	C6M	C	Pins to connect capacitance for power circuitry	
47	VGL	C	Pins to connect capacitance for power circuitry	
48	VCOMH	C	Power setting capacitor for VCOM	
49	VCOML	C	Power setting capacitor for VCOM	
50	VCOM	I	Common electrode driving voltage	

I : Input, O : Output, C : Capacitor, P : Power, D : Dummy

Note: Definition of scanning direction, Refer to figure as below :

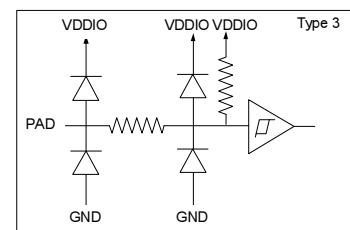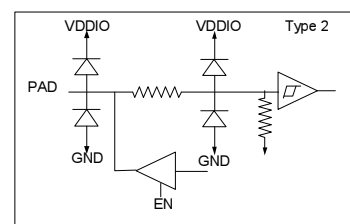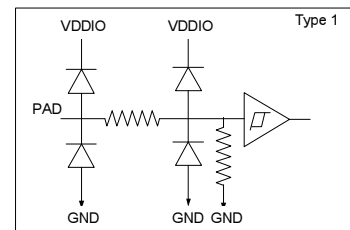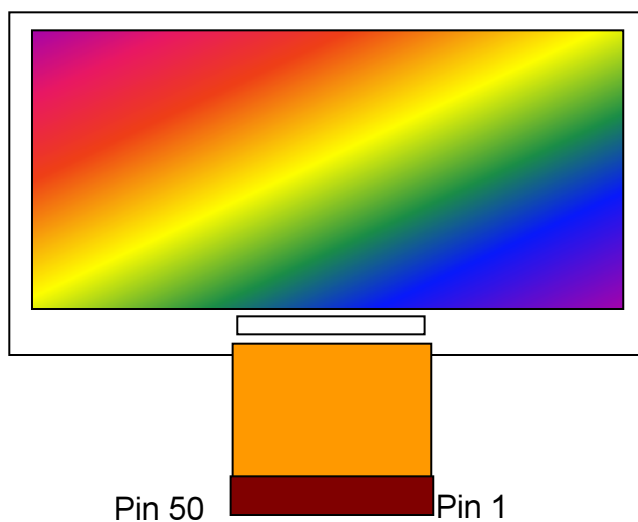


ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTONICS CORP.

2.Absolute Maximum Ratings

Items	Symbol	Values		Unit	Condition
		Min.	Max.		
Power Voltage	VCI / VDDIO	-0.3	4	V	
LED Reverse Voltage	Vr		5	V	One LED
LED Forward Current	If		22	mA	One LED, Note 2

Note 1.If the operating condition exceeds the absolute maximum ratings, the TFT-LCD module may be damaged permanently. Also, if the module operated with the absolute maximum ratings for a long time, its reliability may drop.

Note 2. If LED current exceeds the limit curve, the lifetime will drop dramatically.

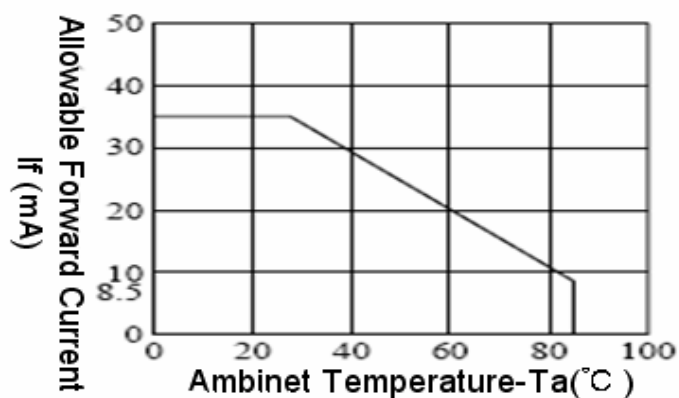


3. Electrical Characteristics

The following items are measured under stable condition and suggested application circuit.

a. TFT- LCD Panel (GND=0V)

Parameter		Symbol	Min	Typ	Max	Unit	Notes
Power Supply		VDD	3.0	3.3	3.6	V	
		VDDIO	1.65	3.3	3.6	V	
Frame Frequency		f _{Frame}		60		Hz	
Dot Data Clock	8 bits serial without dummy	DCLK		27		MHz	
	8 bits serial with dummy			24.53			
Input Signal Voltage		V _i	0		0.3 x VDDIO	V	
		V _I	0.7 x VDDIO		VDDIO	V	
Current Consumption		IVDD		15		mA	

Note 1: Frame rate is 60Hz. Test pattern is the following picture.




b. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.[Note1]	Unit	Remark
Backlight Current			20	22	mA	
Backlight voltage	V _L		(19.2)	21	V	

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

4. AC Timing

a. Display General Information

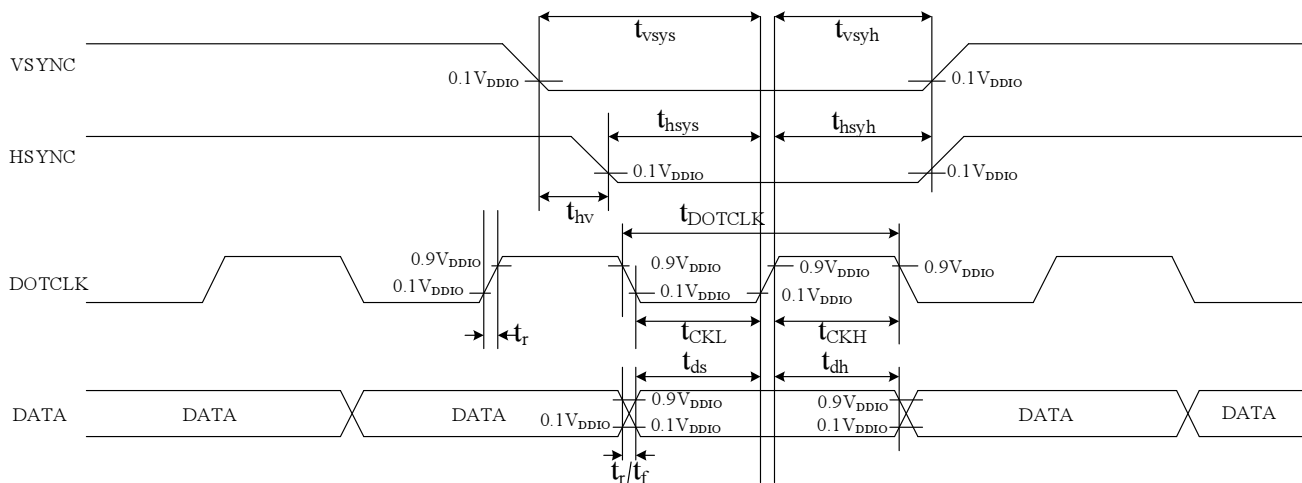

Characteristics	Symbol	Target Min	Target Typ	Target Max	Units
Vertical Sync. Setup Time	t_{vsys}	12	-	-	nSec
Vertical Sync. Hold Time	t_{vsh}	12	-	-	nSec
Horizontal Sync. Setup Time	t_{hsys}	12	-	-	nSec
Horizontal Sync. Hold Time	t_{hsh}	12	-	-	nSec
DOTCLK Low Period	t_{CKL}	20	-	-	nSec
DOTCLK High Period	t_{CKH}	20	-	-	nSec
Data Setup Time	t_{ds}	12	-	-	nSec
Data Hold Time	t_{dh}	12	-	-	nSec
Rise/Fall Time	t_r/t_f	5	-	10	nSec

b. 8-bit Serial Interface

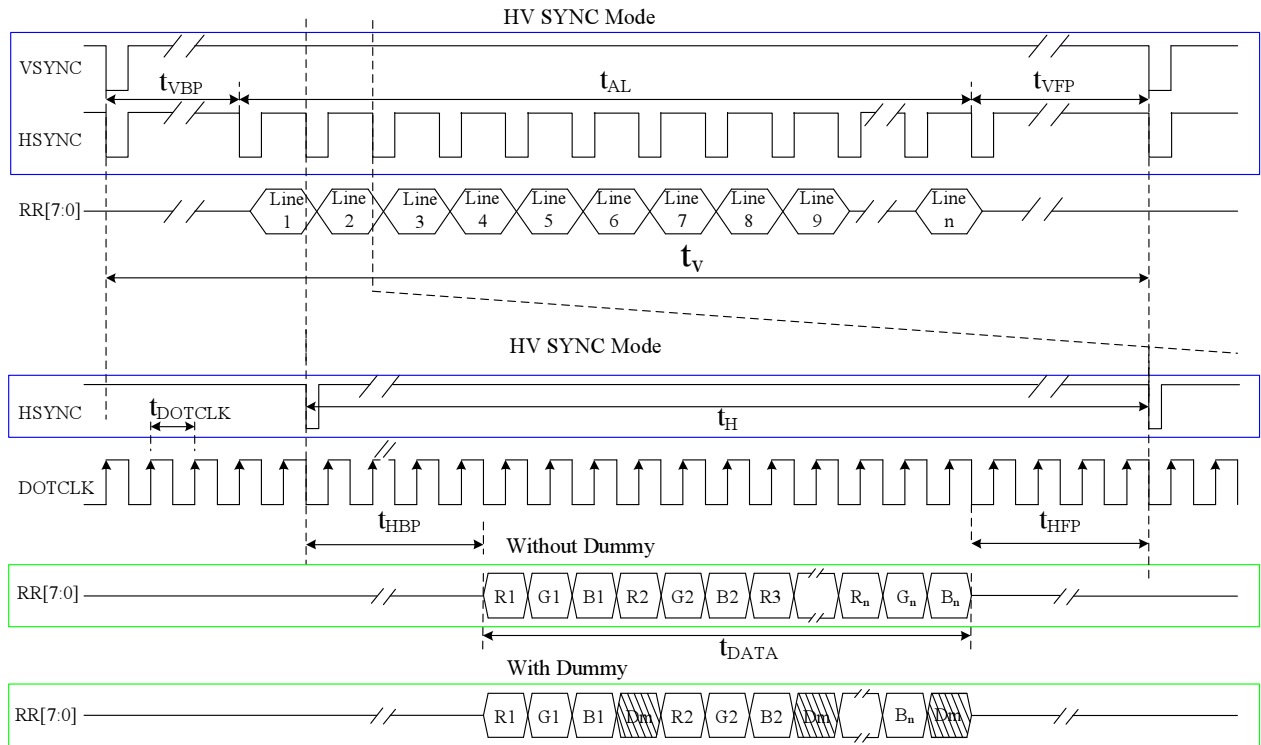


Table: 8-bit Serial Interface HV Sync. Mode without Dummy Timing Characteristics

Parameter			Symbol	Min.	Typ.	Max.	Unit.	Remark		
DCLK frequency			1/t _{DOTCLK}	13.5	27	30	MHz			
HSYNC	Period		t _H	1024	1716	1728	t _{DCLK}			
	Display period		t _{DATA}	960			t _{DCLK}			
	Back porch		t _{HBP}	50	70	255	t _{DCLK}	Note 1		
	Front porch		t _{HFP}	14	686	718	t _{DCLK}			
	Pulse width		t _{HSW}	1	1	t _{HBP} - 1	t _{DCLK}			
VSYNC	Period	Odd	t _V	247.5	262.5	276.5	t _H			
		Even								
	Display period	Odd	t _{AL}	240			t _H			
		Even								
	Back porch	Odd	t _{VBP}	6	21	31	t _H		Note 2	
		Even		6.5	21.5	31.5				
	Front porch	Odd	t _{VFP}	1.5	1.5	-	t _H			
		Even		1	1	-				
	Pulse width	Odd	t _{VSW}	1t _{DCLK}	1t _{DCLK}	1t _H				
		Even								

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

Note 1: The t_{HBP} time is adjustable by setting register HBLK; requirement of minimum blanking time and minimum front porch time must be satisfied.

Note 2: The t_{VHP} time is adjustable by setting register VBLK.

***Frame rate = DCLK frequency/($t_H * t_V$). The condition ($70\text{Hz} \geq \text{Frame rate} \geq 55\text{Hz}$) must be satisfied.**

Table: 8-bit Serial Interface HV Sync. Mode with Dummy Timing Characteristics

Parameter			Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK frequency			1/t _{DotCLK}	20.54	24.535	30	MHz	
HSYNC	Period		t _H	1354	1560	1907	t _{DCLK}	
	Display period		t _{DATA}	1280			t _{DCLK}	
	Back porch		t _{HBP}	50	241	255	t _{DCLK}	
	Front porch		t _{HFP}	24	39	372	t _{DCLK}	
	Pulse width		t _{HSW}	1	1	t _{HBP} - 1	t _{DCLK}	
VSYNC	Period	Odd	t _V	247.5	262.5	276.5	t _H	
		Even						
	Display period	Odd	t _{AL}	240			t _H	
		Even						
	Back porch	Odd	t _{VBP}	6	21	31	t _H	
		Even		6.5	21.5	31.5		
	Front porch	Odd	t _{VFP}	1.5	1.5	-	t _H	
		Even		1	1	-		
	Pulse width	Odd	t _{VSW}	1 t _{DCLK}	1 t _{DCLK}	1t _H		
		Even						

***Frame rate = DCLK frequency/($t_H * t_V$). The condition ($70\text{Hz} \geq \text{Frame rate} \geq 55\text{Hz}$) must be satisfied.**

c. YUV Interface

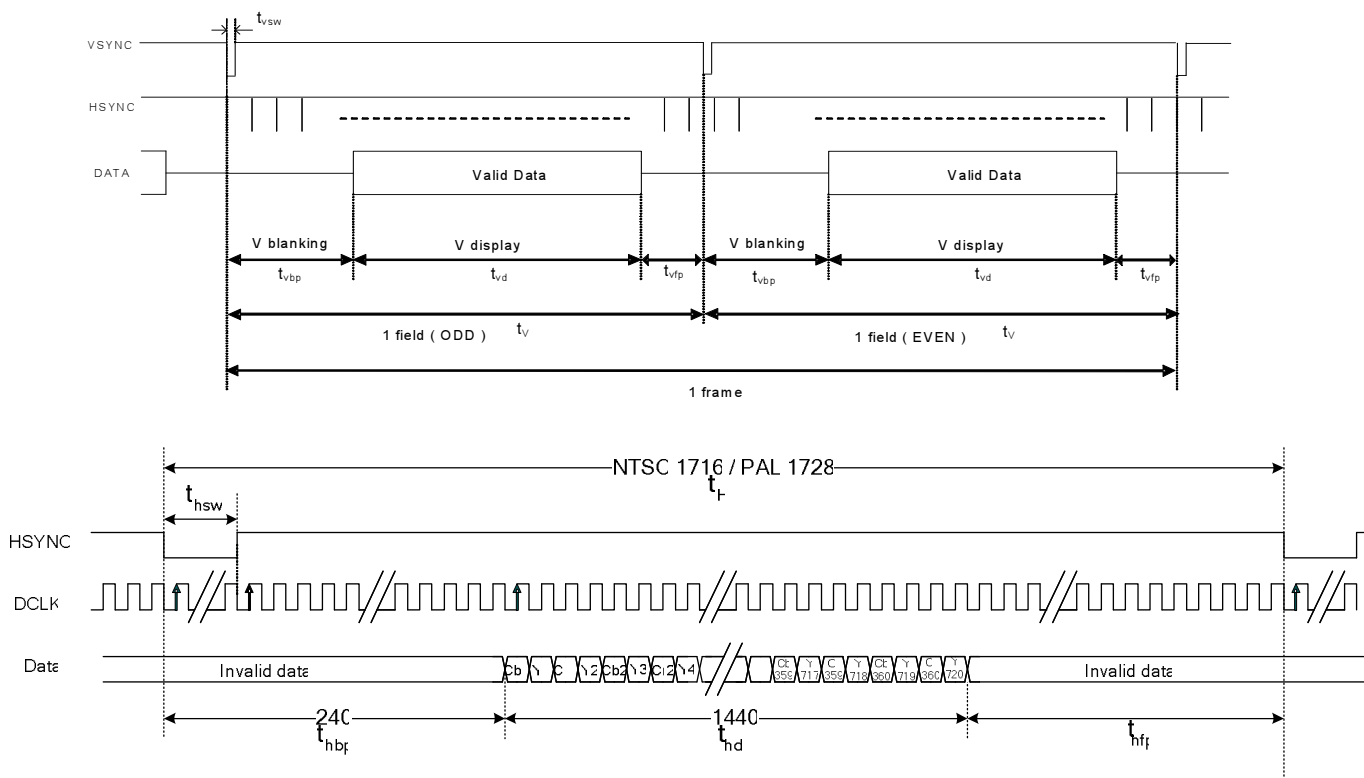


Table: YUV640 Interface HV Sync. Mode Timing Characteristics

Parameter			Symb	Min.	Typ.	Max.	Unit.	Remark
DCLK frequency			1/t _{DCLK}	20.65	24.535	30	MHz	
HSYNC	Period		t _H	1362	1560	1907	t _{DCLK}	
	Display period		t _{hd}	1280			t _{DCLK}	
	Back porch		t _{hbp}	50	240	255	t _{DCLK}	
	Front porch		t _{hfp}	32	40	372	t _{DCLK}	
	Pulse width		t _{hsw}	-	1	-	t _{DCLK}	
VSYNC	Period	Odd	t _V	247.5	262.5	276.5	t _H	
		Even						
	Display period	Odd	t _{vd}	240			t _H	
		Even						
	Back porch	Odd	t _{vbp}	6	21	31	t _H	
		Even		6.5	21.5	31.5		
	Front porch	Odd	t _{vfp}	1.5	1.5	-	t _H	
		Even		1	1	-		
	Pulse width	Odd	t _{vsw}	-	1	-	t _{DCLK}	
		Even						

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

Table: YUV720 Interface HV Sync. Mode Timing Characteristics


Parameter			Symb	Min.	Typ.	Max.	Unit.	Remark
DCLK frequency			1/t _{DCLK}	23	27	30	MHz	
HSYNC	Period		t _H	1524	1716	1907	t _{DCLK}	
	Display period		t _{hd}	1440			t _{DCLK}	
	Back porch		t _{hbp}	50	240	255	t _{DCLK}	
	Front porch		t _{hfp}	34	36	212	t _{DCLK}	
	Pulse width		t _{hsw}	-	1	-	t _{DCLK}	
VSYNC	Period	Odd	t _V	247.5	262.5	276.5	t _H	
		Even						
	Display period	Odd	t _{vd}	240			t _H	
		Even						
	Back porch	Odd	t _{vbp}	6	21	31	t _H	
		Even		6.5	21.5	31.5		
	Front porch	Odd	t _{vfp}	1.5	1.5	-	t _H	
		Even		1	1	-		
	Pulse width	Odd	t _{vsw}	1 t _{DCLK}	1 t _{DCLK}	1t _H		
		Even						

Note 1: The t_{HBP} time is adjustable by setting register HBLK; requirement of minimum blanking time and minimum front porch time must be satisfied.


Note 2: The t_{VHP} time is adjustable by setting register VBLK.

*Frame rate = DCLK frequency/($t_{\text{H}} * t_{\text{V}}$). The condition ($70\text{Hz} \geq \text{Frame rate} \geq 55\text{Hz}$) must be satisfied.


d. SPI Timing Diagram

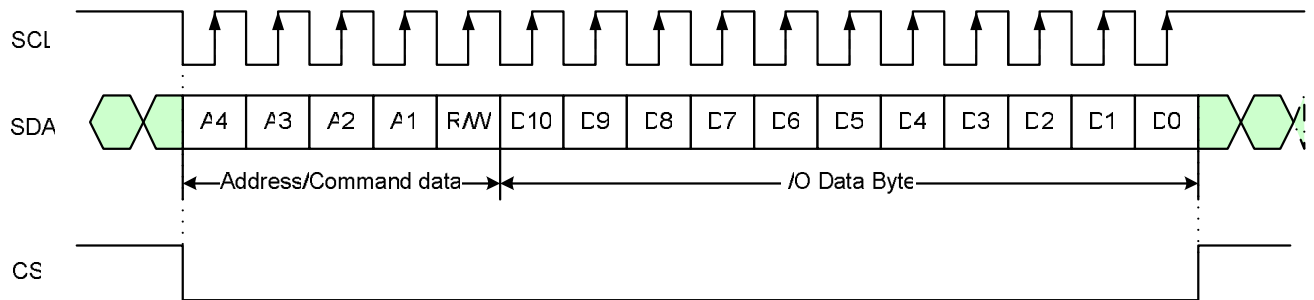


Write Mode:

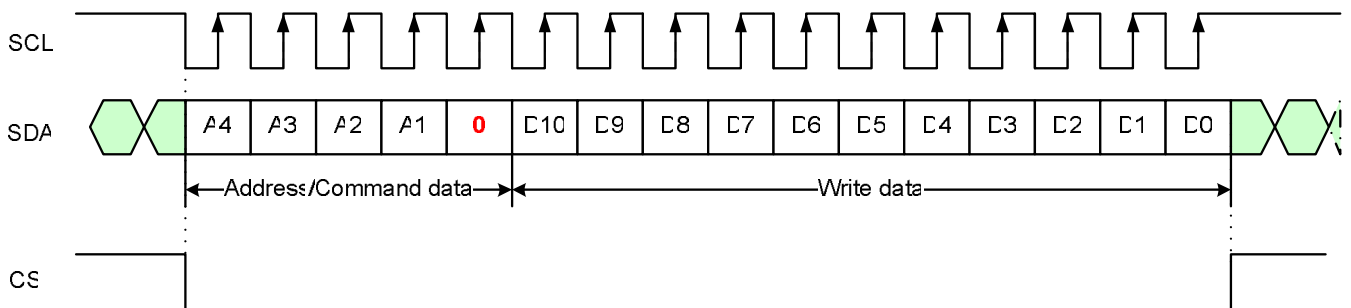

Read Mode:

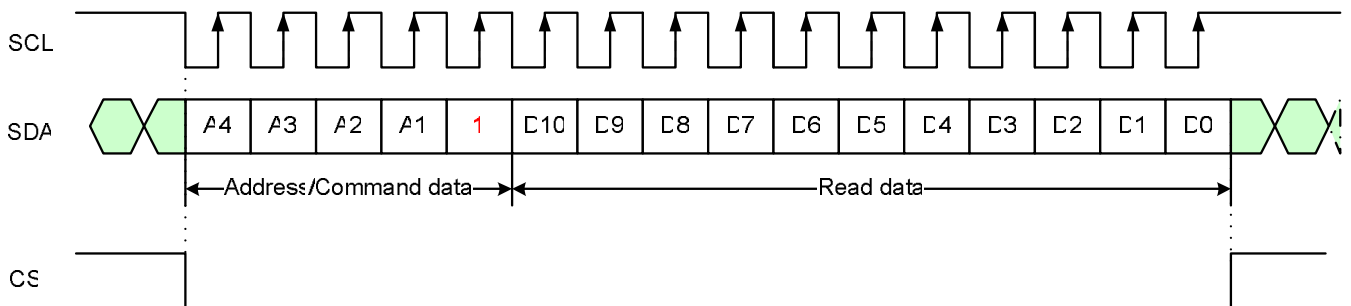

e. SPI Timing Specification

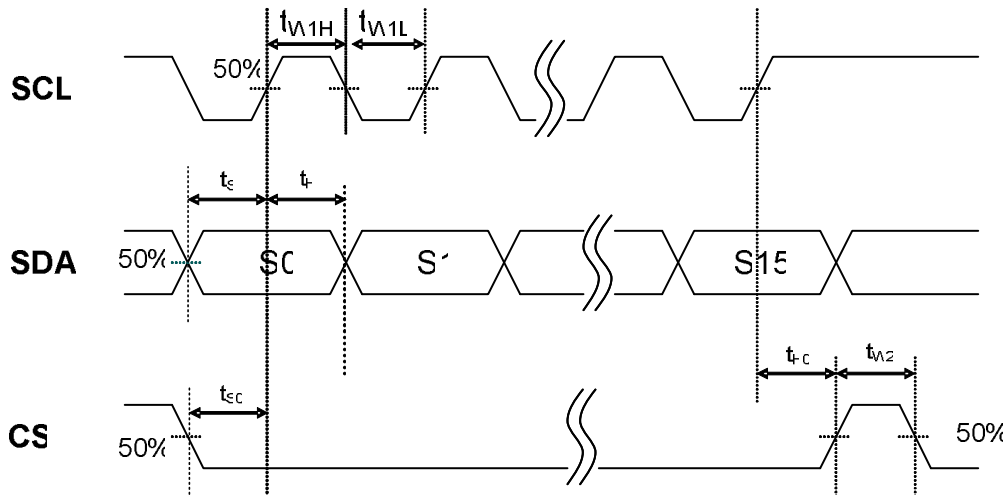

Item	Symbol	Min	Typical	Max	Unit
CS input setup Time	t_{S0}	50			ns
CS input hold Time	t_{H0}	50			ns
CS pulse high width	t_{W2}	1			us
Serial data input setup Time	t_{S1}	50			ns
Serial data input hold Time	t_{H1}	50			ns
SCL pulse low width	t_{W1L}	50			ns
SCL pulse high width	t_{W1H}	50			ns

5. Command Register Settings

a. Serial setting map

➤ () is default

No.	Register address					MSB		Register data								LSB			
	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0			
R0	0	0	0	0	R/W	0	0	0	0	0	UD (1)	SHL (1)	GRB (1)	STB (0)	SHDB (0)	SHCB (1)			
R1	0	0	0	1	R/W	x	x	x	Y_CbCr (00)		1	1	1	SEL (000)					
R2	0	0	1	0	R/W	x	x	1	HBLK (01000110)										
R3	0	0	1	1	R/W	x	x	x	x	0	0	VBLK (10101)							
R4	0	1	0	0	R/W	x	1	1	1	1	0	0	1	0	1	AVGY			
R5	0	1	0	1	R/W	x	x	x	x	x	x	x	CONTRAST (1000)						
R6	0	1	1	0	R/W	x	x	x	x	BRIGHTNESS (1000000)									
R7	0	1	1	1	R/W	x	x	x	x	OP (000)			VGL_SEL (10)		VGH_SEL (11)				
R8	1	0	0	0	R/W	x	x	x	1	VCOMH (1000001)									
R9	1	0	0	1	R/W	x	x	x	x	VCOML (1000001)									
R10	1	0	1	0	R/W	x	x	x	PWM_400K (0)	DC_F (1)	CLK_ChP_M (10)		0	1	1	0			
R11	1	0	1	1	R/W	x	GMA_M (1)	GMA_V4 (011)			GMA_V1 (011)			GMA_V0 (011)					
R12	1	1	0	0	R/W	x	x	GMA_V48 (011)			GMA_V36 (011)			GMA_V16 (011)					
R13	1	1	0	1	R/W	x	x	x	x	x	GMA_V59 (011)			GMA_V55 (011)					
R14	1	1	1	0	R/W	x	x	x	x	x	GMA_V63 (011)			GMA_V62 (011)					
R15	1	1	1	1	R/W	x	x	x	x	x	VENDOR (00)		VERSION (0000)						

NOTE:

1. "X": don't care => Please set to '0'.
2. "0*" and "1*" is for engineering reserved register setting, and please follow the suggested value.
3. Please refer to our recommended register settings section for better performance.

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

b. Description of serial control data

I. R0 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R0	0	0	0	0	R/W	0	0	0	0	0	UD (1)	SHL (1)	GRB (1)	STB (0)	SHDB (0)	SHCB (1)

UD: Vertical shift direction selection

UD	Function
D5	
0	Shift from down to up, Last line = G1←G2...G239←G240 = First line
1	Shift from up to down, First line = G1→G2...G239→G240 = Last line (Default)

SHL: Horizontal shift direction selection

SHL	Function
D4	
0	Shift from right to left, Last data = S1←S2...S959←S960 = First data
1	Shift from left to right, First data = S1→S2...S959→S960 = Last data (Default)

GRB: Global reset

GRB	Function
D3	
0	Reset all registers to default value
1	Normal operation (Default)

STB: Standby mode setting

STB	Function
D2	
0	Standby (Display OFF); timing control, DAC, and DC/DC converter are off, and register data should be kept (Default)
1	Normal operation (Display ON), with power on/off sequence

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

SHDB: DC-DC converter shutdown setting

SHDB	Function
D1	
0	DC-DC converter is off. (Default)
1	DC-DC converter is on. DC-DC controls by STB and power on/off sequence.

SHCB: Charge Pump shutdown setting

SHCB	Function
D0	
0	Charge Pump converter is off.
1	Charge Pump converter is on. (Default) Charge Pump controls by STB and power on/off sequence.

II. R1 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R1	0	0	0	1	R/W	x	x	x	Y_CbCr (00)		1	1	1	SEL (0)		

Y_CbCr: Y & CbCr exchange position (only valid for YUV640 / YUV720)

Y_CbCr	Function
D7~D6	
00	Cb1 Y1 Cr1 Y2 Cb2 Y3 Cr2 Y4 (Default)
01	Cr1 Y1 Cb1 Y2 Cr2 Y3 Cb2 Y4
10	Y1 Cb1 Y2 Cr1 Y3 Cb2 Y4 Cr2
11	Y1 Cr1 Y2 Cb1 Y3 Cr2 Y4 Cb2

SEL: Input data timing format selection

SEL	Function
000	HV mode without dummy. (Default)
001	HV mode with dummy.
100	HV mode with YUV640
101	HV mode with YUV720

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

III. R2 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R2	0	0	1	0	R/W	x	x	1	HBLK (01000110)							

HBLK: Horizontal blanking setting.

HBLK(D7~D0)	HBLK	Unit	Remark
00110010	50	DCLK(*)	Without dummy
01000110 (Default)	70(Default)		
11111111	255		
00110010	50	DCLK(*)	With dummy
11110001 (Default)	241(Default)		
11111111	255		
00110010	50	DCLK(*)	YUV640 YUV720
11110000 (Default)	240(Default)		
11111111	255		

IV. R3 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R3	0	0	1	1	R/W	x	x	x	x	00	VBLK (10101)					

VBLK: Vertical blanking setting

VBLK(D4~D0)	VBLK	Unit
00001	1	t _H
10101	21 (Default)	
11111	31	

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

V. R4 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R4	1	0	0	0	R/W	x	1	1	1	1	0	0	1	0	1	AVGY

AVGY: Average luminance Y setting

AVGY	Function
D0	
0	Only used odd Y sample for YUV to RGB conversion
1	Used odd and even Y sample for YUV to RGB conversion (Default)

Note: This function is only used for YUV640, YUV720.

AVGY='0'

$$R_n = 1.164 * (Y_{2n-1} - 16) + 1.596 * (C_{rn} - 128)$$

$$G_n = 1.164 * (Y_{2n-1} - 16) - 0.813 * (C_{rn} - 128) - 0.392 * (C_{bn} - 128)$$

$$B_n = 1.164 * (Y_{2n-1} - 16) + 2.017 * (C_{bn} - 128)$$

Where Y:16~235 C_r:16~240 C_b:16~240

AVGY='1'

$$R_n = 1.164 * [(Y_{2n-1} + Y_{2n}) / 2 - 16] + 1.596 * (C_{rn} - 128)$$

$$G_n = 1.164 * [(Y_{2n-1} + Y_{2n}) / 2 - 16] - 0.813 * (C_{rn} - 128) - 0.392 * (C_{bn} - 128)$$

$$B_n = 1.164 * [(Y_{2n-1} + Y_{2n}) / 2 - 16] + 2.017 * (C_{bn} - 128)$$

Where Y:16~235 C_r:16~240 C_b:16~240

VI. R5 Register


No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R5	0	1	0	1	R/W	x	x	x	x	x	x	x	CONTRAST (1000)			

CONTRAST: RGB contrast level adjustment

CONTRAST	Function
D3~D0	
0000	0
1000	1 (Default)
1111	1.875

Note: each step is 0.125/LSB.

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

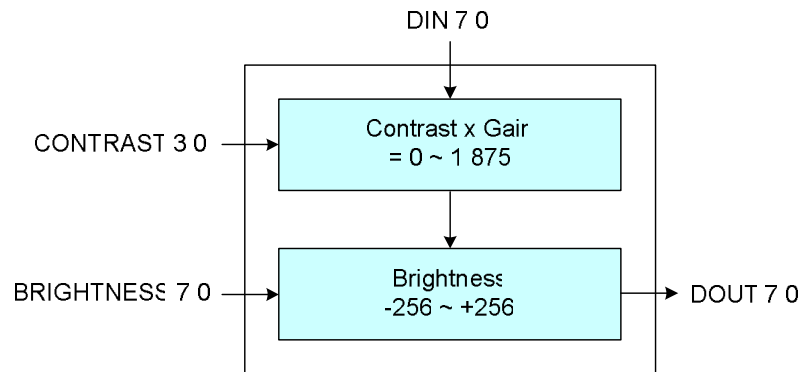

8-bit serial setting to control the contrast (gain) for RGB signals

$DOUT[7:0] = DIN[7:0] \times Contrast[0 \text{ to } 1.0 \text{ to } 1.875]$

Note: output value above “255” is clipped

VII. R6 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R6	0	1	1	0	R/W	x	x	x	x	BRIGHTNESS						

BRIGHTNESS: RGB brightness level adjustment

BRIGHTNESS	Function
D6~D0	
00h	-256
40h	0 (Default)
7Fh	+256

Note: each step is 4/LSB.

8-bit serial setting to control the RGB brightness level

$DOUT[7:0] = DIN[7:0] + BRIGHTNESS[-256 \text{ to } 0 \text{ to } +256]$

Note: output value above “255” is clipped

VIII. R7 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R7	0	1	1	1	R/W	x	x	x	x	OP (000)			VGL_SEL (10)		VGH_SEL (11)	

OP: DAC output driving capability selection

OP	Function
D6~D4	

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

0XX	Controlled by input pin OP0 and OP1(Default)
100	-25%
101	Normal
110	+25%
111	+50%

VGL_SEL:VGL voltage selection

VGL_SEL	Function
D3~D2	
00	-8V
01	-9V
10	-10V (Default)
11	-11V

VGH_SEL:VGH voltage selection

VGH_SEL	Function
D1~D0	
00	12
01	13
10	14
11	15(Default)

IX. R8 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R8	1	0	0	0	R/W	x	x	x	1	VCOMH (1000001)						

VCOMH: VCOMH level adjustment

VCOMH	Voltage(V)	
D6~D0	MVA/TN Normal	TN LV
00h	3.162	1.362
:	:	:
41h	4.332 (Default)	2.532 (Default)
:	:	:
7Fh	5.448	3.648

Note: Step is 18mV/step.

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

X. R9 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R9	1	0	0	1	R/W	x	x	x	x	VCOML (1000001)						

VCOML: VCOML level adjustment

VCOML	Voltage(V)	
D6~D0	MVA/TN Normal	TN LV
00h	-2.358	-2.628
:	:	:
41h	-1.188 (Default)	-1.458 (Default)
:	:	:
7Fh	-0.072	-0.342

Note: Step is 18mV/step.

XI. R10 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R10	1	0	1	0	R/W	x	x	x	PWM_400K (0)	DC_F (1)	CLK_ChP_M (10)		0	1	1	0

PWM_400K: PWM frequency selection

PWM_400K	Function
D7	
0	Around 200KHz. (Default)
1	Around 400KHz.

DC_F: DCDC frequency selection

DC_F	Function
D6	
0	Operating frequency is base on 13.5MHz.
1	Operating frequency is base on 27MHz. (Default)

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

CLK_ChP_M: Charge pumping frequency selection

CLK_ChP_M	Function
D5~D4	
00	$F(\text{Chp}) = f(\text{Hsync})/2$
01	$F(\text{Chp}) = f(\text{Hsync})$
10	$F(\text{Chp}) = f(\text{Hsync}) \times 2$. (Default)
01	$F(\text{Chp}) = f(\text{Hsync}) \times 4$

XII. R11~14 Register

No.	A4	A3	A2	A1	R/W	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R11	1	0	1	1	R/W	x	GMA_M (1)	GMA_V4 (011)			GMA_V1 (011)			GMA_V0 (011)		
R12	1	1	0	0	R/W	x	x	GMA_V48 (011)			GMA_V36 (011)			GMA_V16 (011)		
R13	1	1	0	1	R/W	x	x	x	x	x	GMA_V59 (011)			GMA_V55 (011)		
R14	1	1	1	0	R/W	x	x	x	x	x	GMA_V63 (011)			GMA_V62 (011)		

GMA_M: Gamma adjustment selection

GMA_M	Function
D9	
0	Manual adjust by registers R11~R14.
1	Auto set to gamma 2.2 by LC type. (Default)

C. Optical Specification (Note1, Note 2 and Note 3)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response Time							
Rise	T_r	$\theta=0^\circ$	--	10	20	ms	Note 4
Fall	T_f		--	15	25	ms	
Contrast ratio	CR	At optimized viewing angle	250	300	--		Note 5,6
Viewing Angle	Φ_T Top Φ_B Bottom Φ_L Left Φ_R Right	CR ≥ 10	35 40 45 45	50 55 60 60	-- -- -- --	deg.	Note 7
Brightness	Y_L	$\theta=0^\circ$	250	300	--	cd/m ²	
Chromaticity White	X	$\theta=0^\circ$	0.268	0.318	0.368		
	Y	$\theta=0^\circ$	0.274	0.324	0.374		

Note 1. Ambient temperature =25℃.


Note 2. To be measured in the dark room.

Note 3.To be measured on the center area of panel with a field angle of 1°by Topcon luminance meter BM-5A, after 10 minutes operation.

Note 4. Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively.

The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

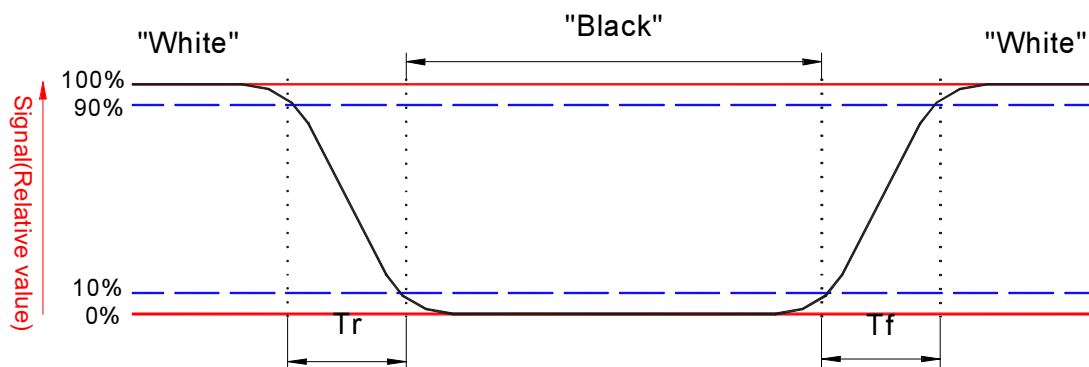

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

Note 5. Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 6. White $V_i = V_{i50} \overset{\text{---}}{+} 1.5V$

Black $V_i = V_{i50} \pm 2.0V$


“ $\pm$ ” Means that the analog input signal swings in phase with COM signal.

“ $\overset{\text{---}}{+}$ ” Means that the analog input signal swings out of phase with COM signal.

V_{i50} : The analog input voltage when transmission is 50%


The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 7. Definition of viewing angle, Φ , Refer to figure as below.

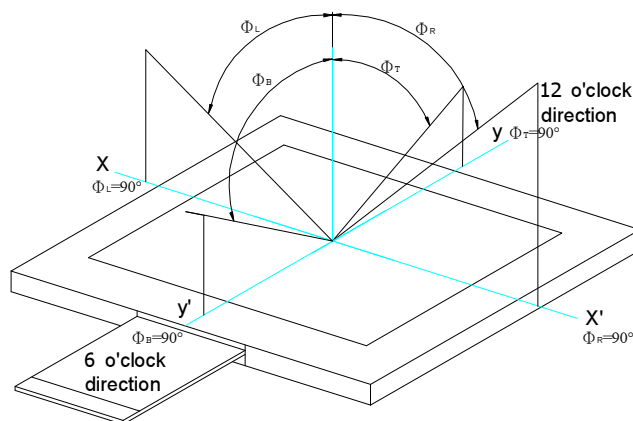


Note 8. Measured at the center area of the panel in gray level 255

Note 9. Color Filter Arrangement

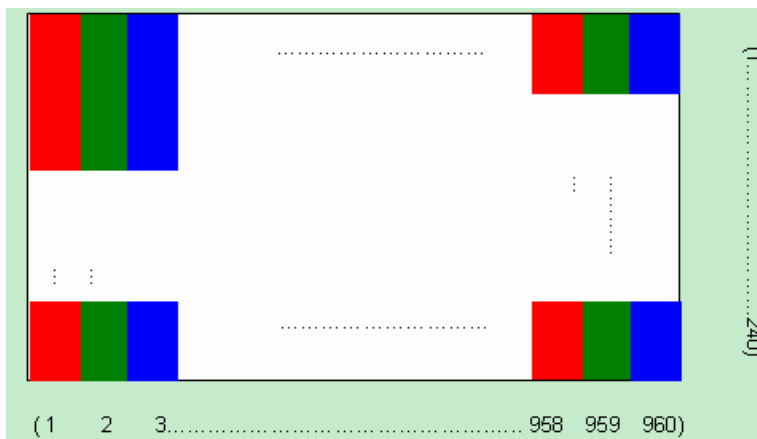

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

Note 10. Chromaticity Diagram

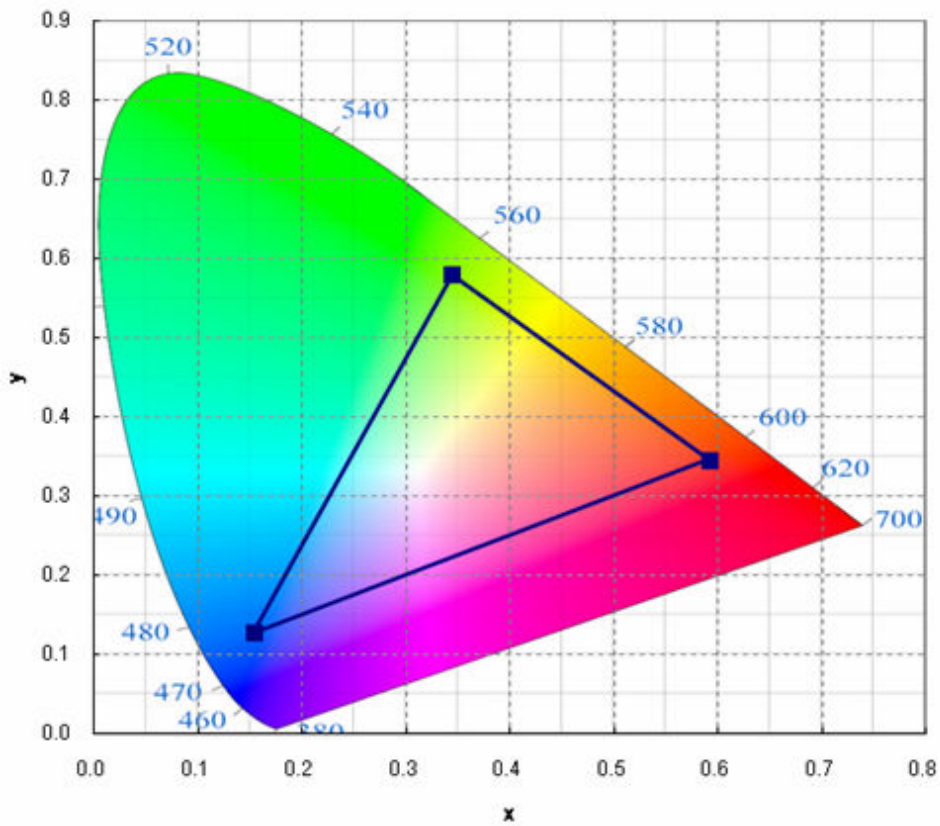

A035QN05 V1		
	X	Y
W	0.318	0.324
R	0.593	0.343
G	0.346	0.579
B	0.155	0.126


ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

D. Reliability Test Items

No.	Test items	Conditions	Remark
1	High Temperature Storage	Ta= 80□ 240Hrs	
2	Low Temperature Storage	Ta= -40□ 240Hrs	
3	High Ttemperature Operation	Tp= 70□ 240Hrs	
4	Low Temperature Operation	Ta= -10□ 240Hrs	
5	High Temperature & High Humidity	Tp= 60□. 90% RH 240Hrs	Operation
6	Heat Shock	-30□~80□, 50 cycle, 2Hrs/cycle	Non-operation
7	Electrostatic Discharge	Air-mode : +/- 8kV Contact-mode : +/- 4kV	Note 2,3
8	Vibration	Frequency range : 10~55Hz Stoke : 1.5mm Sweep : 10~55Hz~10Hz 2 hours for each direction of X,Y,Z (6 hours for total)	Non-operation JIS C7021, A-10 condition A
10	Mechanical Shock	100G . 6ms, ±X,±Y,±Z 3 times for each direction	Non-operation JIS C7021, A-7 condition C
11	Vibration (With Carton)	Random vibration: 0.015G ² /Hz from 5~200Hz -6dB/Octave from 200~500Hz	IEC 68-34
12	Drop (With Carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	

Note 1. Ta: Ambient temperature.


Note 2. ESD Testing Flow as the below,

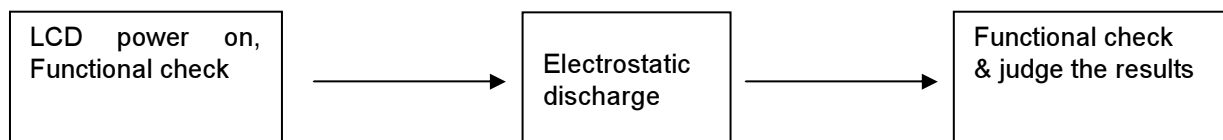

Note 3. ESD testing method.


1. Ambient: 24~26□, 56~65%RH
2. Instruments: Noiseken ESS-2000,
3. Operation System: "CX40FL-B" and adapter "A035QN04 V0T0"
4. Test Mode: Operating mode, test pattern: colorbar+8Gray scale
5. Test Method:
 - a. Contact Discharge: 150pF(330Ω) 1sec, 5 points, 10 times/point
 - b. Air Discharge: 150pF(330Ω) 1sec, 5 points, 10 times/point
6. Test point:

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

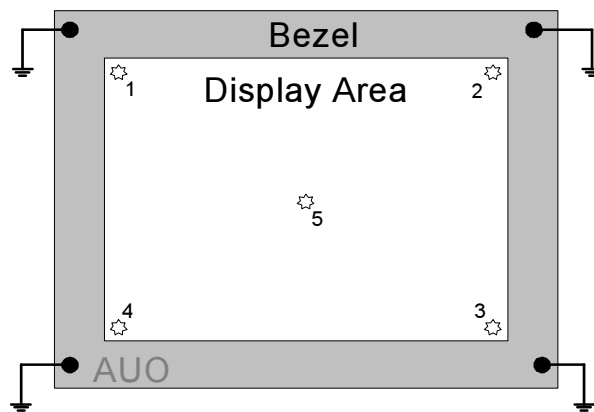

7. The metal casing is connected to power supply ground (0V) at four corners.
8. All register commands are repeating transfer.

E. Packing Form

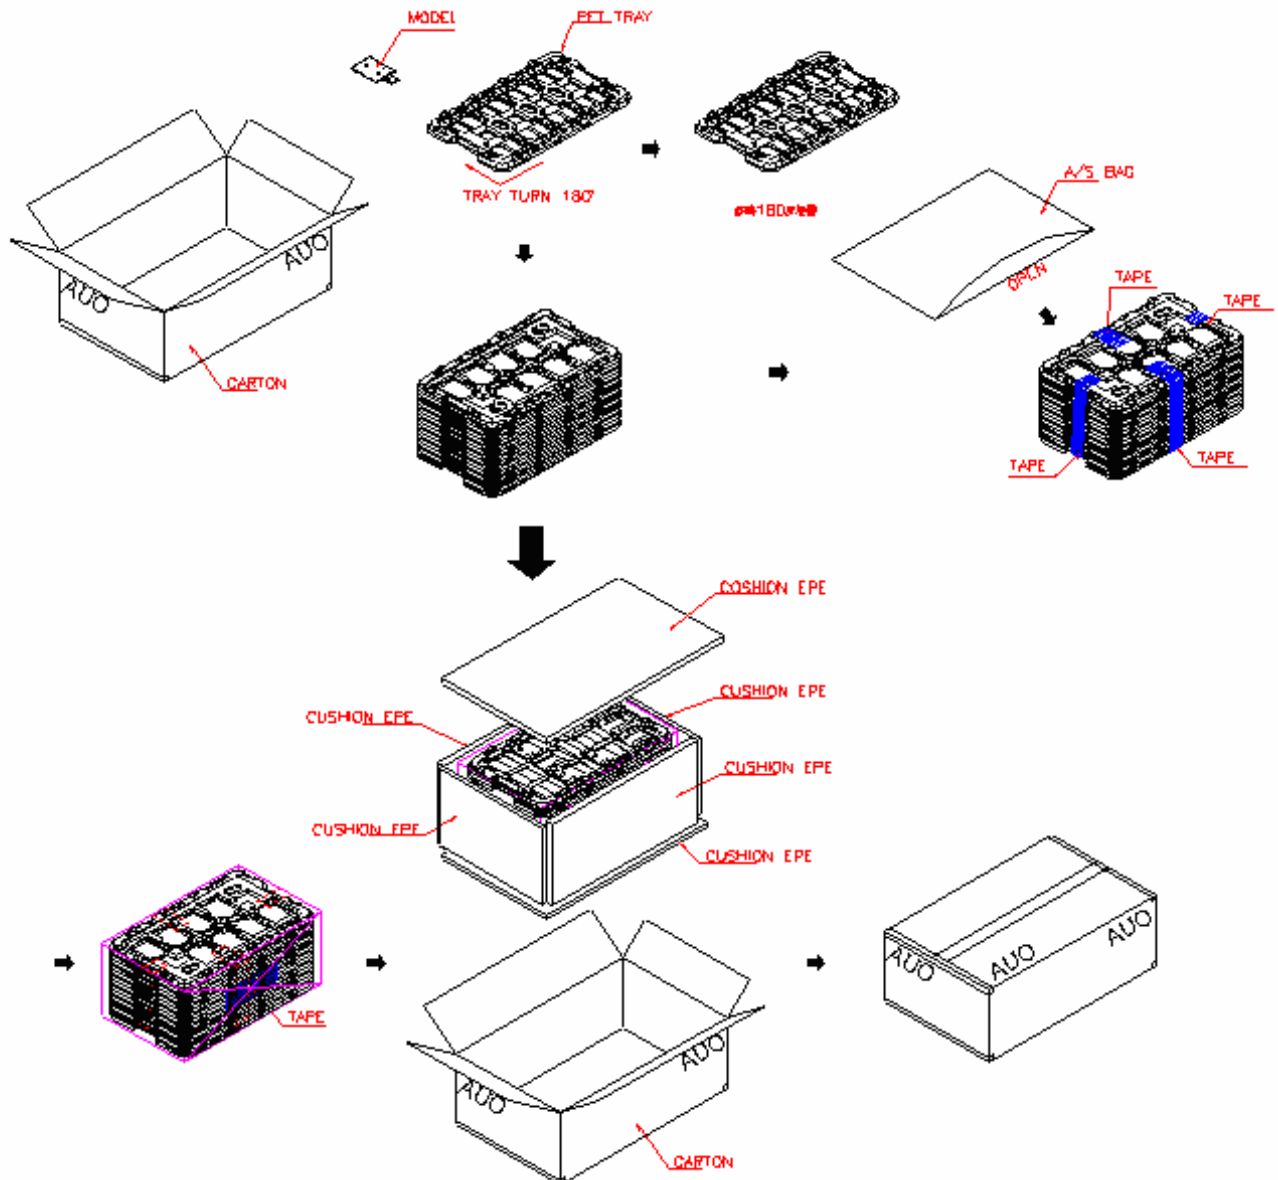


F. Outline dimension

Any stress or attachment on the back of the LCD module is forbidden.

The protection film in the back side of LCM should be tear off before assembly.

This drawing is the property of AU Optonics Corp. and should not be disclosed to any third party without prior permission of AU Optonics Corp.

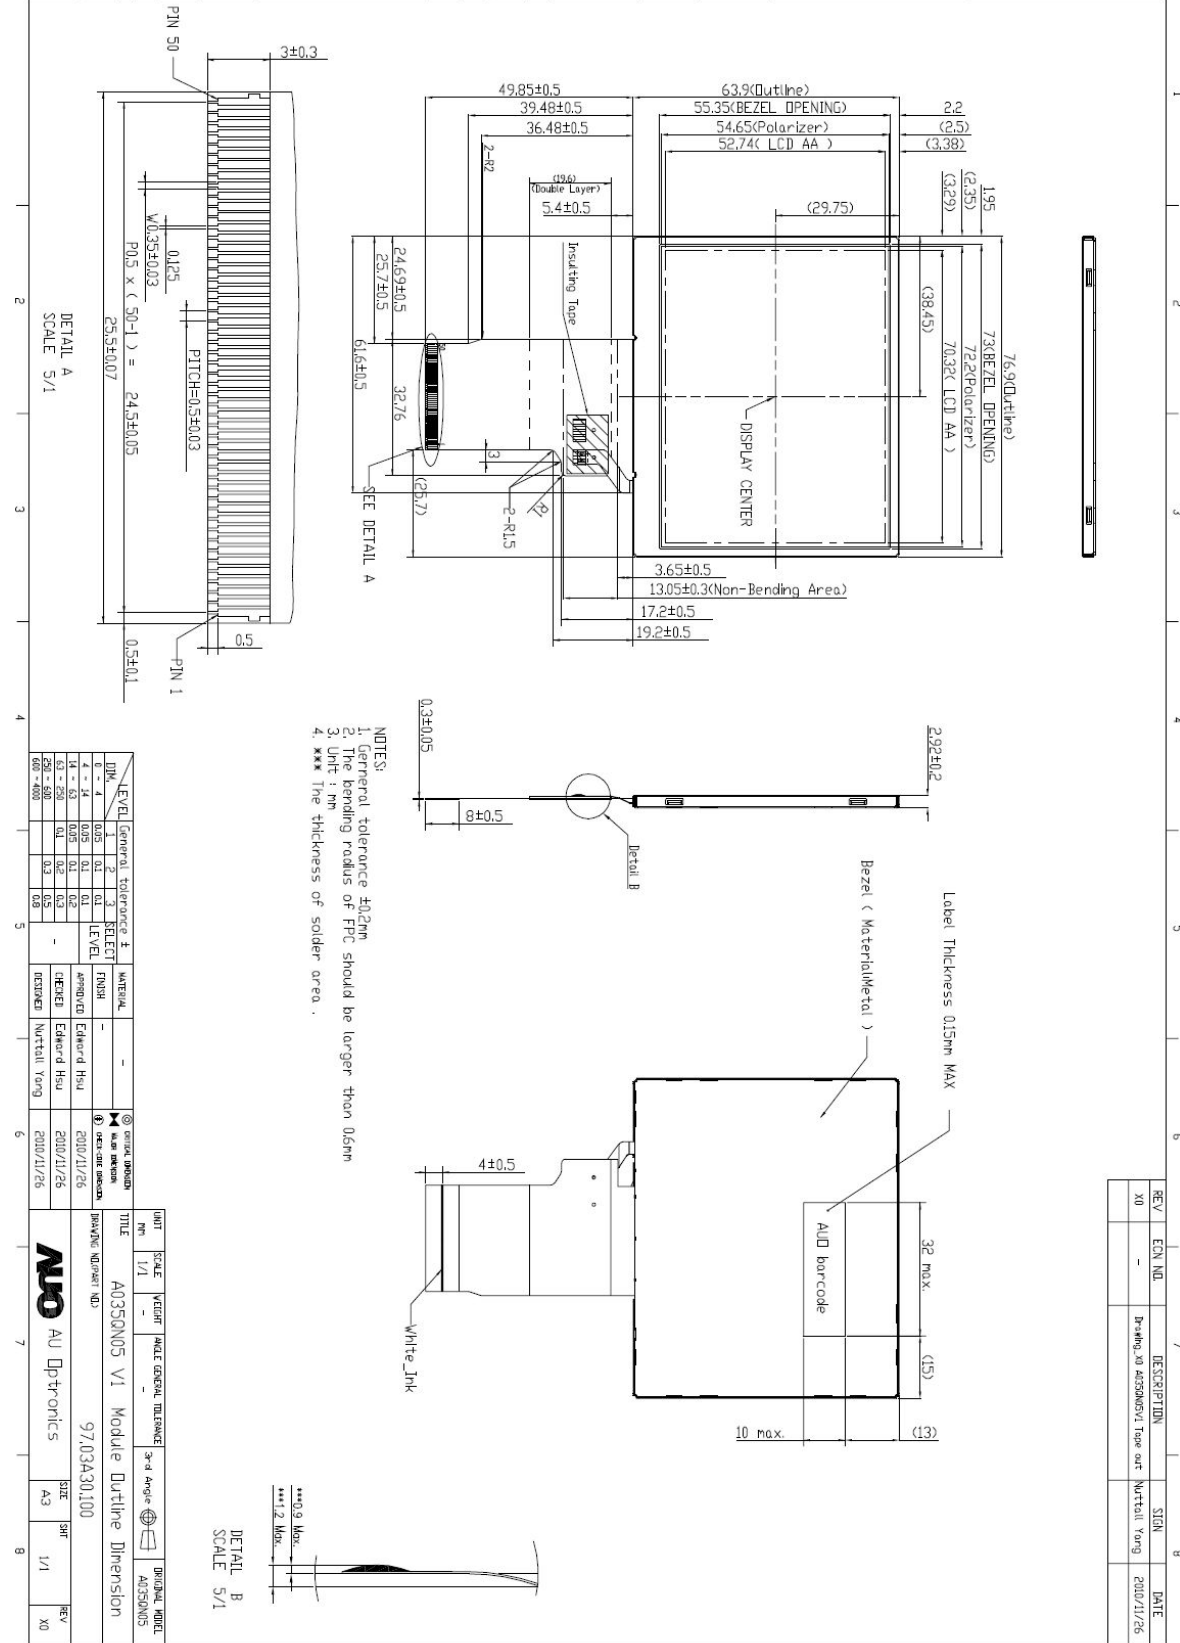

G. Application note

1.Recommended Register Settings

a. 8-bit Serial Interface HV Sync. Mode without Dummy

Power On

No.	Command		NOTE
	High byte	Low byte	
1	00h	31h	NOTE1
Whait 50 us			
2	00h	39h	
Whait 100 us			
3	10h	38h	NOTE2
4	21h	46h	
5	30h	15h	
6	43h	CBh	
7	50h	08h	
8	60h	40h	
9	70h	0Bh	
10	80h	B5h	
11	90h	35h	
12	A0h	66h	
13	B1h	F3h	
14	C1h	77h	
15	D0h	2Dh	
16	E0h	1Ah	
17	00h	3Dh	

Power Off

No.	Command		NOTE
	High byte	Low byte	
1	00h	39h	NOTE3

NOTE 1. Please add these commands if you don't use the HW Reset.

NOTE 2.Please refer to the POWER ON sequence section for register setting timing as power-on.

NOTE 3.Please refer to the POWER OFF sequence section for register setting timing as power-off.

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM AU OPTRONICS CORP.

b. 8-bit Serial Interface HV Sync. Mode with Dummy

Power On

No.	Command		NOTE
	High byte	Low byte	
1	00h	31h	NOTE1
Whait 50 us			
2	00h	39h	
Whait 100 us			
3	10h	39h	NOTE2
4	21h	F1h	
5	30h	15h	
6	43h	CBh	
7	50h	08h	
8	60h	40h	
9	70h	0Bh	
10	80h	B5h	
11	90h	35h	
12	A0h	66h	
13	B1h	F3h	
14	C1h	77h	
15	D0h	2Dh	
16	E0h	1Ah	
17	00h	3Dh	

Power Off

No.	Command		NOTE
	High byte	Low byte	
1	00h	39h	NOTE3

NOTE 1. Please add these commands if you don't use the HW Reset.

NOTE 2. Please refer to the POWER ON sequence section for register setting timing as power-on.

NOTE 3. Please refer to the POWER OFF sequence section for register setting timing as power-off.

c. YUV640 Mode

Power On

No.	Command		NOTE
	High byte	Low byte	
1	00h	31h	NOTE1
Whait 50 us			
2	00h	39h	
Whait 100 us			
3	10h	3Ch	NOTE2
4	21h	F0h	
5	30h	15h	
6	43h	CBh	
7	50h	08h	
8	60h	40h	
9	70h	0Bh	
10	80h	B5h	
11	90h	35h	
12	A0h	66h	
13	B1h	F3h	
14	C1h	77h	
15	D0h	2Dh	
16	E0h	1Ah	
17	00h	3Dh	

Power Off

No.	Command		NOTE
	High byte	Low byte	
1	00h	39h	NOTE3

NOTE 1. Please add these commands if you don't use the HW Reset.

NOTE 2. Please refer to the POWER ON sequence section for register setting timing as power-on.

NOTE 3. Please refer to the POWER OFF sequence section for register setting timing as power-off.

d. YUV720 Mode

Power On

No.	Command		NOTE
	High byte	Low byte	
1	00h	31h	NOTE1
Whait 50 us			
2	00h	39h	
Whait 100 us			
3	10h	3Dh	NOTE2
4	21h	F0h	
5	30h	15h	
6	43h	CBh	
7	50h	08h	
8	60h	40h	
9	70h	0Bh	
10	80h	B5h	
11	90h	35h	
12	A0h	66h	
13	B1h	F3h	
14	C1h	77h	
15	D0h	2Dh	
16	E0h	1Ah	
17	00h	3Dh	

Power Off

No.	Command		NOTE
	High byte	Low byte	
1	00h	39h	NOTE3


NOTE 1. Please add these commands if you don't use the HW Reset.

NOTE 2. Please refer to the POWER ON sequence section for register setting timing as power-on.

NOTE 3. Please refer to the POWER OFF sequence section for register setting timing as power-off.

2. Power on/off sequence

e. Power on (Standby Disabling)

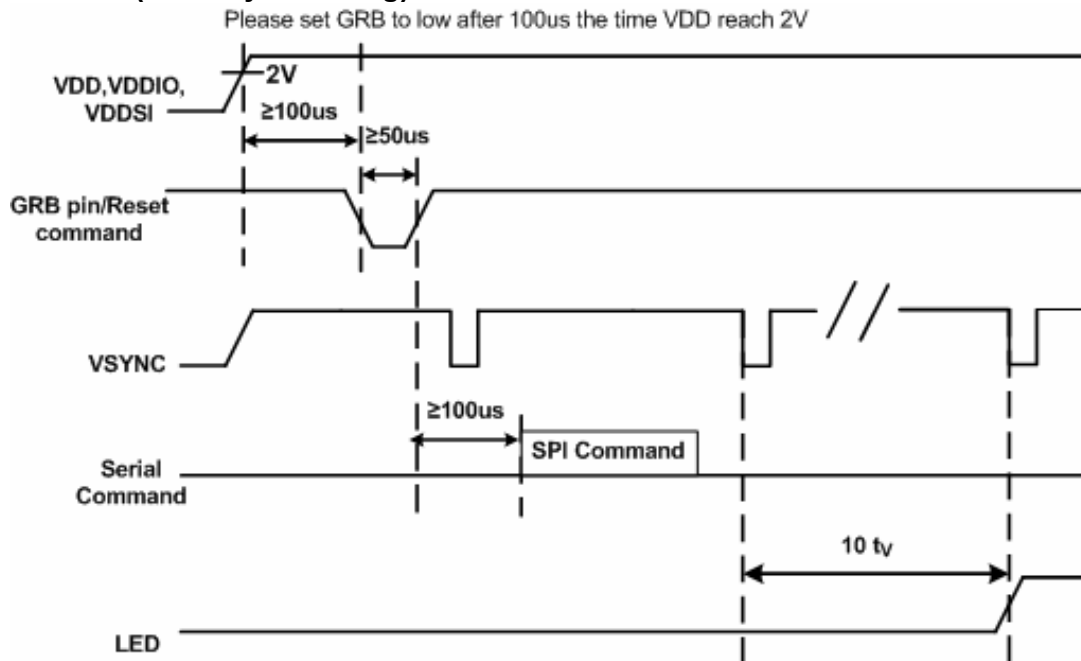


t_v : VSYNC Period

Note

- 1: After Setting Recommended Register, the driver enters into the normal operating mode.
- 2: RESET signal is necessary for power on, Please refer to the POWER ON sequence. . . You can use HW GRB PIN or SW Reset command to do this.
- 3: After the driver enters into the normal operating mode, The minimum cycle time of LED ON is 10 frames.

f. Power off (Standby Enabling)

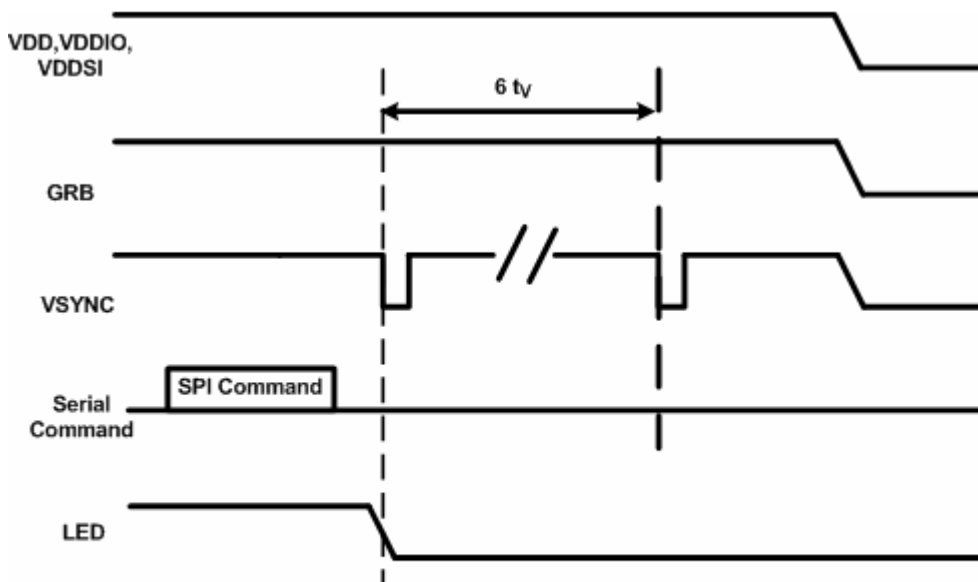

t_v : VSYNC Period


Note

- 1: After Setting Recommended Register, the driver enters into standby mode.
- 2: Please Let LED OFF after the driver enters into the standby mode,
- 3: When enters into standby mode, The minimum cycle time of VDD OFF is 6 frames.

3. Suggested Circuit

The suggested circuit and recommended capacitor specification are both showed as follows. Please refer to the design for better display quality.

Note : (Pin 3~6 is reserved for TP , customer should let it open)

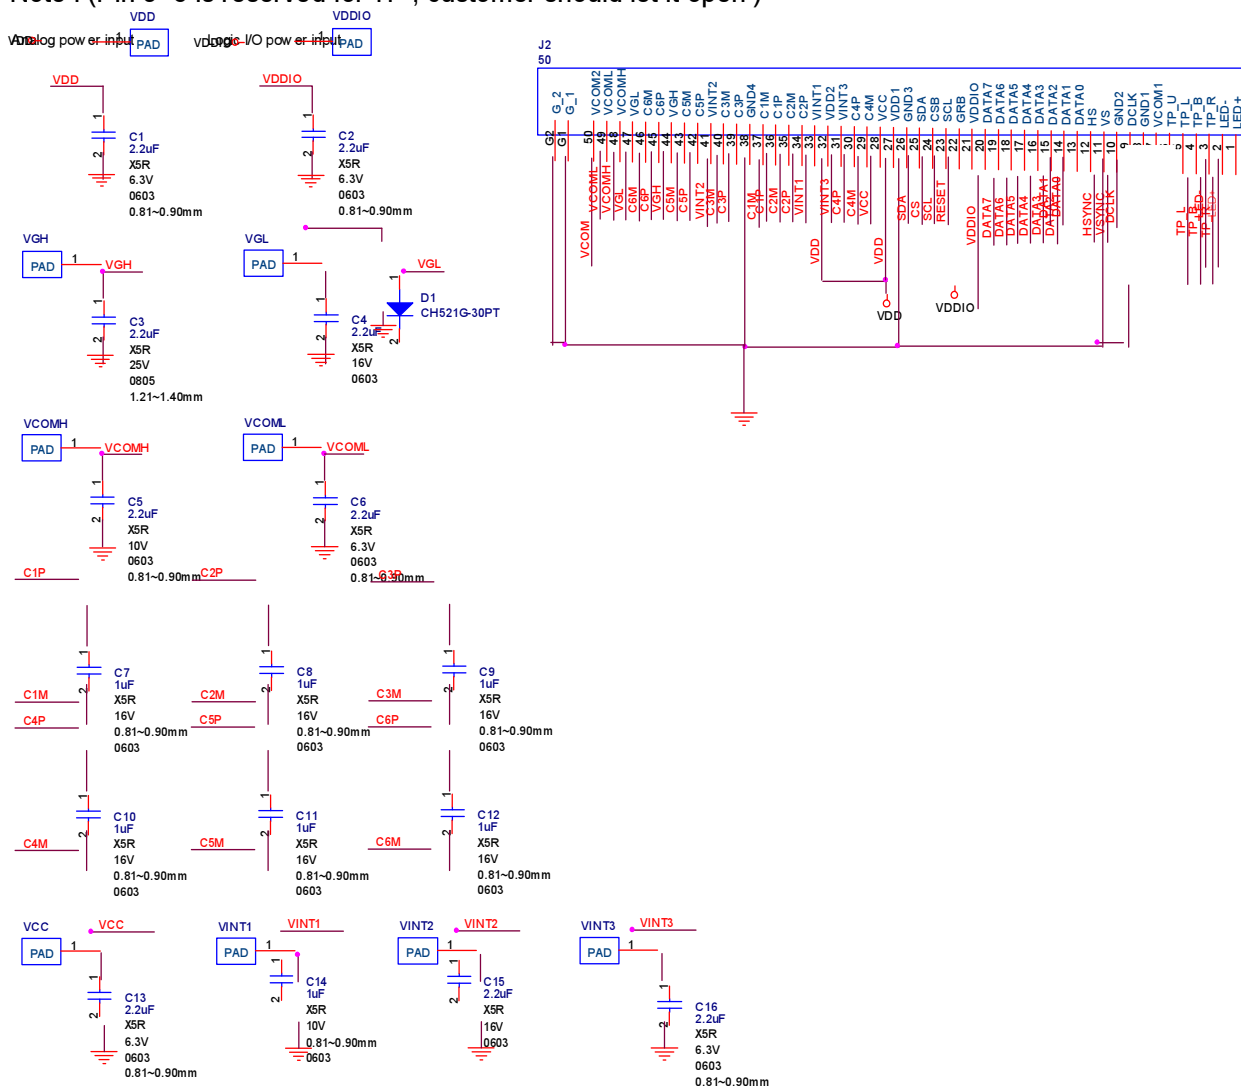


4. Input Data Timing

When SEL = "000" HV mode without dummy is selected, the input data RGB sequence should match the setting of SHL in R1.


When SHL = '1', the RGB sequence of input data is "R data" -> "G data" -> "B data".

When SHL = '0', the RGB sequence of input data is "B data" -> "G data" -> "R data".

The illustration is shown as below:

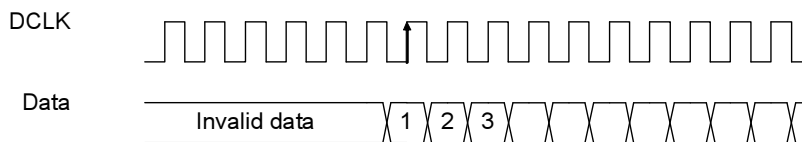

❖ SHL = '1', H shift direction = left to right.

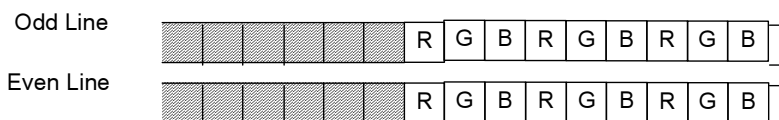

❖ SHL = '0', H shift direction = right to left.

