

TFT-Display Datenblatt

Modell LP125WH2-SLT2

Kurzdaten

Hersteller	LG Display
Diagonale	12,5" / 31,75 cm
Format	wide
Auflösung	1366 x 768
Backlight	LED / 300 cd/m²
Interface	LVDS
Touchscreen	nein
Temperatur	0... +50°C (Betrieb)

TO:

DATE: '12. 08. 07

Vertrieb durch:


Inselkammerstr. 10
82008 Unterhaching
Tel: +49 89 614 503 40
www.hy-line.de/computer

Specification of 12.5" TFT/LCD MODEL: LP125WH2 (SLT2)

Prepared	Checked	Approved	
H.W.Lee /Eng. Dept. /Engineer	Y.S.Ha /Eng. Dept. /Manager	J.Y.Lee /Eng. Dept. /Senior Mgr	S.O.Ann /CS. Dept. /Senior Mgr

NOTICE of RECEIPT

We accepted this specification. **OME Operations, TOSHIBA Corp.**

Purchasing Dept.	Eng.	Senr. Eng.	Senr. Mgr
PC Hardware Dept.	Eng.	Senr. Eng.	Senr. Mgr

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

- CONTENTS -

Record of Revision	4
1. Scope	4
2. General Specifications	4
2.1. Features	
2.2. Dimensional Outline	
3. Absolute Maximum Ratings	9
3.1. Absolute Ratings of Environment	
3.2. Electrical Absolute Maximum	
3.3. Mechanical ratings	
3.4. The others	
4. Optical Characteristics	16
4.1 Test Conditions	
4.2 Optical Specifications	
5. Electrical Characteristics	21
5.1. TFT LCD module	
5.2. Backlight Unit	
5.3. Regulation	
6. Block Diagram	25
7. Input Terminal Pin Assignment	26
7.1 TFT LCD module	
7.2 Backlight Unit	
7.3 LVDS Transmitter	
7.4 Timing Diagrams of LVDS for Transmission	
7.5 Input Signal, Basic Display Colors and Gray Scale of Each Colors	
8. Interface timing	31
8.1 Timing Parameters	
8.2 Timing diagrams of interface signal	
8.3 Power On / Off Sequence	
9. Cosmetic Specification	33
9.1 Sampling	
9.2 Conditions of Inspections	
9.3 Defect modes	
9.4 Mechanical inspection	
9.5 Visual Inspection	
9.6 Electrical inspection	
10. Packing	37
11. Labels and Other parts Exchange	39
12. General Precaution	47
Appendix	49

Record of Revision

Date	Rev. No.	Sheet(New)	Item	Old	New	Reason
'12.4.13	0.0	All	-	-	-	First Edition
'12.4.24	0.1	4	Weight	Max. Value Only	Max. & Typ. Value	Customer Requirement
		10	Torque Value Rescrewed Test	Listed	Deleted	Customer Requirement
		11	FL Cable	Listed	Deleted	Customer Requirement
		24	Block Diagram	Listed	Updated	Customer Requirement
		36	Packing	No Box Dimension	Updated Box Dimension	Customer Requirement
		37, 38	Toshiba G-Code	Wrong G-Code	Updated Right G-Code	Customer Requirement
'12. 6. 4	0.2	30	Timing Parameters	Listed	Updated	Customer Requirement
		48, 49, 50	Edid	Listed	Updated	Customer Requirement
'12. 8. 7	0.3	15	Viewing Angle	TBD	85	Customer Requirement
		15	13 Points CR Var.	TBD	3.0	Customer Requirement
		22	Backlight Unit	23mA	20.5mA	Correction
		23	Material List	SM4500B	SW5517	Correction
		30	Timing Parameter	Listed	Update	Correction

1. Scope


This specification is applicable to LCD manufacturer's 12.5" diagonal size TFT-LCD module "LP125WH2(SLT2)" designed for Personal Computer.

2. General Specification

2.1. Features

Item	Specifications
Display area (Active area)	275.59(H, typ.) × 154.94 (V, typ.) (12.5 inches diagonal)
Driving Method	TFT active matrix
Number of Pixels	1366 (W) × 768 (H) × R,G,B (HD) (pixels) ¹⁾
Pixel pitch	0.201mm × 0.201 mm ¹⁾
Pixel Arrangement	RGB vertical stripes ¹⁾
Display color	262,144 (colors)
Display Mode	AH-IPS, Normally Black
Viewing Direction	6 o'clock (in direction of maximum contrast)
Surface Treatment	Anti-glare treatment of the front polarizer
Interface	LVDS
Backlight	Single LED for Horizontal-lighting (LED Quantity : 44ea)
Dimensional Outline	290.5±0.5 (H) × 170.2 ±0.5 (W) / 2.85(Max) (D) (mm) (w/o PCB)
Bezel Opening	280.1(H) × 159.5±0.5 (W) (mm)
Weight	220g (Max.) / 210g(Typ.)

Note 1)

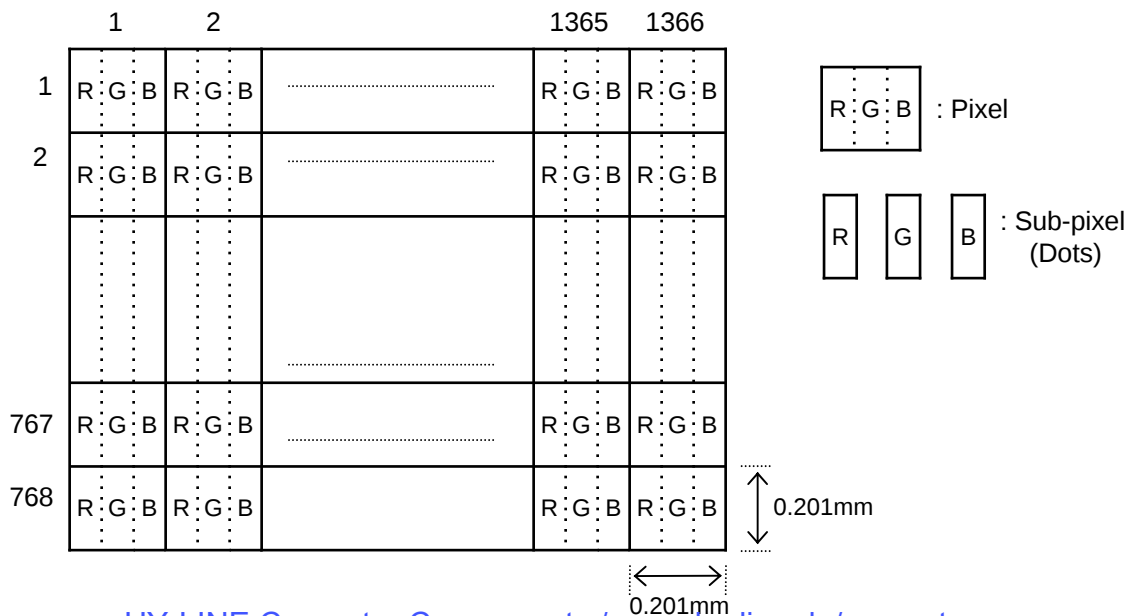

HY-LINE Computer Components / www.hy-line.de/computer


Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$



* The size that related with metal bezel includes tape thickness (0.07mm)


(Rear figure)

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

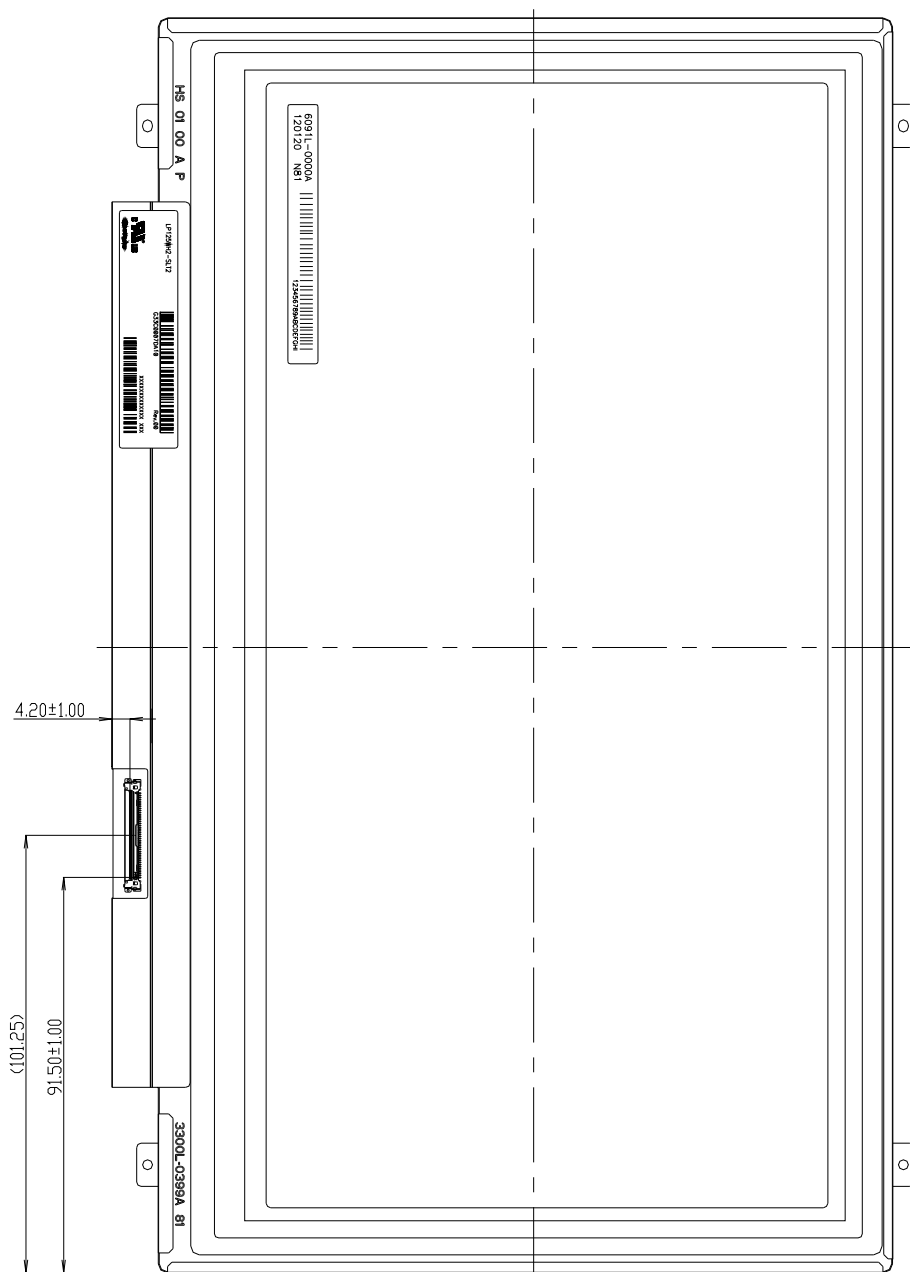

(Detail description of height of LCM back side & TAB Zone)

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

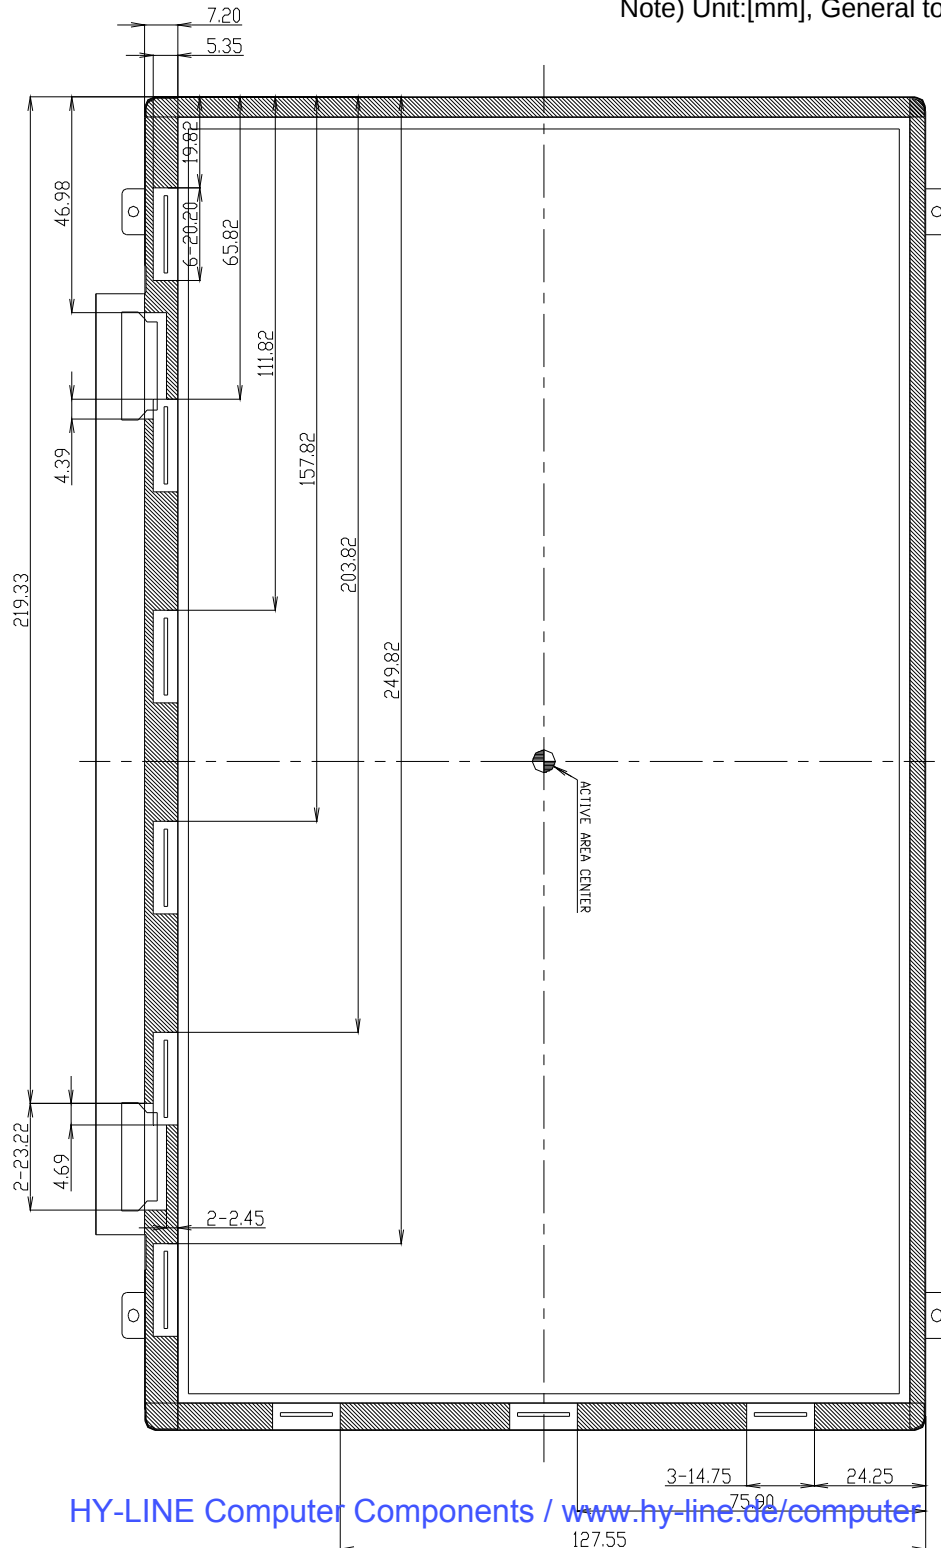


HY-LINE Computer Components / www.hy-line.de/computer

3. Absolute Maximum Ratings

3.1. Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit	Note
Operating Ambient Temperature	T _{OP}	0	+50	°C	(1)
Operating Temperature for Panel	-	0	+50	°C	(2)
Storage Temperature	T _{STG}	-20	+60	°C	(1)
Operating Ambient Humidity	H _{OP}	10	90	%RH	(1)
Storage Humidity	H _{STG}	10	90	%RH	(1)
Air Pressure	-	57	101.3	kPa	Operation
Air Pressure	-	12	101.3	kPa	Non-operation
Altitude	-	-	3	Km	Operation
Altitude	-	-	12	Km	Non-operation

Note 1) Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.

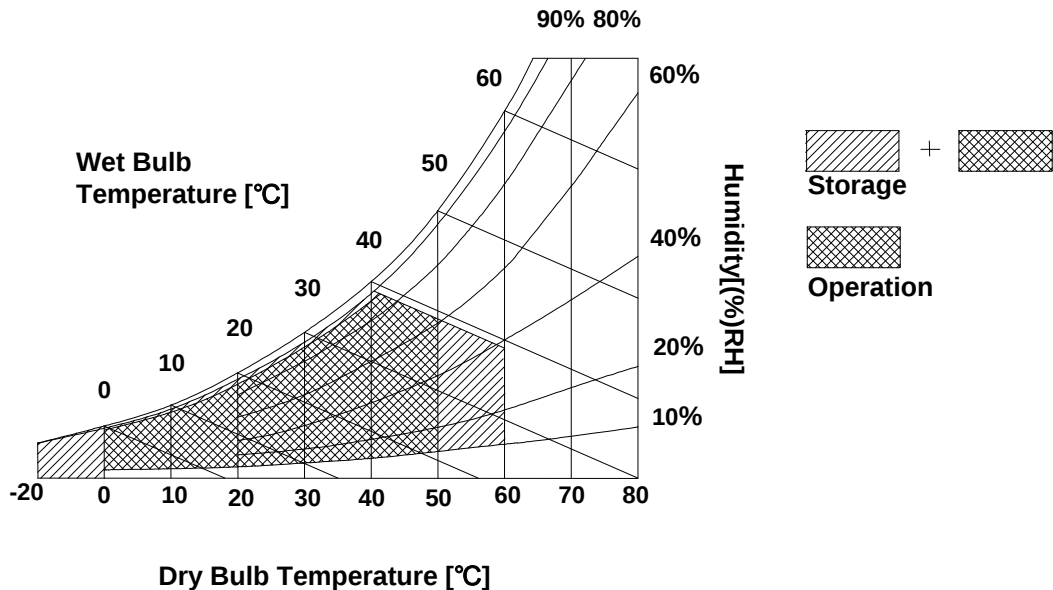

Note 2) The surface temperature caused by self heat radiation of cell itself is specified on this item.

3.2. Electrical Absolute Maximum

(1) TFT LCD Module

Item	Symbol	Min	Max	Unit	Note
Power Supply Voltage	V _{DD}	-0.3	+7.0	V	at 25 ± 5°C
Logic Input Voltage	V _{IN}	-0.3	V _{DD} +0.3	V	LVDS interface

(2) Back Light Unit

Item	Symbol	Min	Max	Unit	Note
LED Driver Supply Voltage	V _L	-0.3	23	V	damage to the device
LED PWM / LED_EN Voltage	V _{PWM} V _{LED_EN}	-0.3	6.0	V	

3.3. Mechanical Ratings

Test Item	Test Conditions	Note
Mechanical Vibration	Frequency Range 5 - 500 Hz, 14.7m/s ² 1.5G) constant, 0.5Hrs each axis (X, Y, Z direction).	Non Operation
	Frequency Range 5 - 500 Hz, 4.9m/s ² (0.5G) constant, 0.5Hrs each axis (X, Y, Z direction).	Operation
Mechanical Shock	* 240G, Pulse width 2 ms, Sine Wave, ±X, ±Y, ±Z direction. 70G, Pulse width 11ms, Sine Wave ±X, ±Y, ±Z direction. * Note) Normal function is only checking points.	Non Operation
LCD fix condition -> See Note (2)	98 m/s ² (10G), Pulse width 11 ms, Sine Wave, ±X, ±Y, ±Z direction.	Operation
Pressure Resistanace -> See Note (1)	No Destruction with the force 196 N (20 kgf, 16 mm in diameter) to the display surface at the vertical direction. No Destruction with the force 294.2 N (30 kgf, 30 mm in diameter) to the back of the display surface at the vertical direction. Only the breakage of below items will not happen after test. (Glass.LED & Circuit parts)	Non Operation Fig 1-1 Fig 1-2 Fig 1-3
Connector tension test	Input connector : With 50 times of connector trial there must be no damage to the shape and functionaly.	Non Operation
Tapping test	Tapping area : All bezel(Metal cover) side, LCD: Full-screen gray (L32). "Ripple (Pooling)" can not be seen in Active Area Tapping Force: Max 3kgf.cm	Operation

Definitions of failure for judgment shall be as follows:


- (1) Function of the module should be maintained.
- (2) Current consumption should be smaller than the specified value.
- (3) Appearance and display quality should not have distinguished degradation.
- (4) Luminance should be larger than the minimum value specified in optical specification.

Note 1)

(1) The compression condition of front side

(a) Compression point : 12 points (refer to Fig 1-1)

(b) Compression condition: 20kgf, 3 sec, Tool diameter: 16 mm in diameter (refer to Fig 1-3)

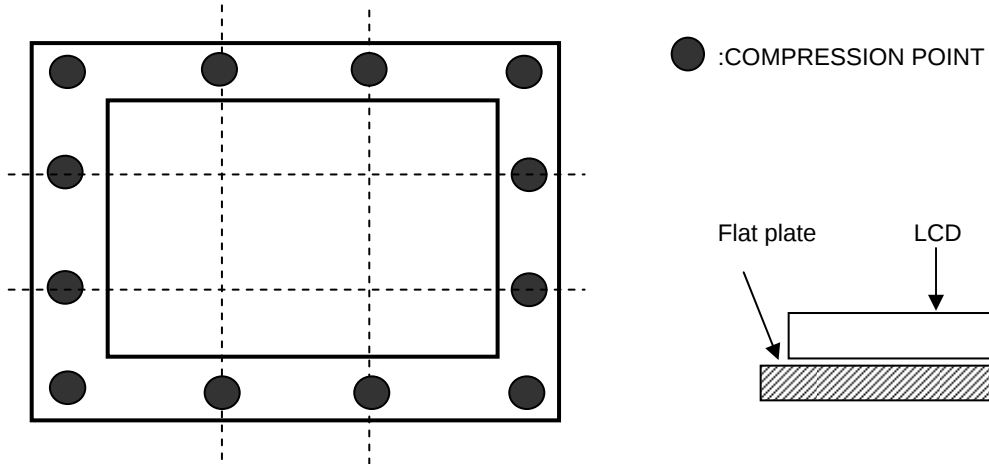


[Fig 1-1]


(2) The compression condition of rear side

(a) Compression point : 21 points (refer to Fig 1-2)

(b) Compression condition : 30kgf, 3 sec, Tool radius: 30 mm in diameter (refer to Fig 1-3)

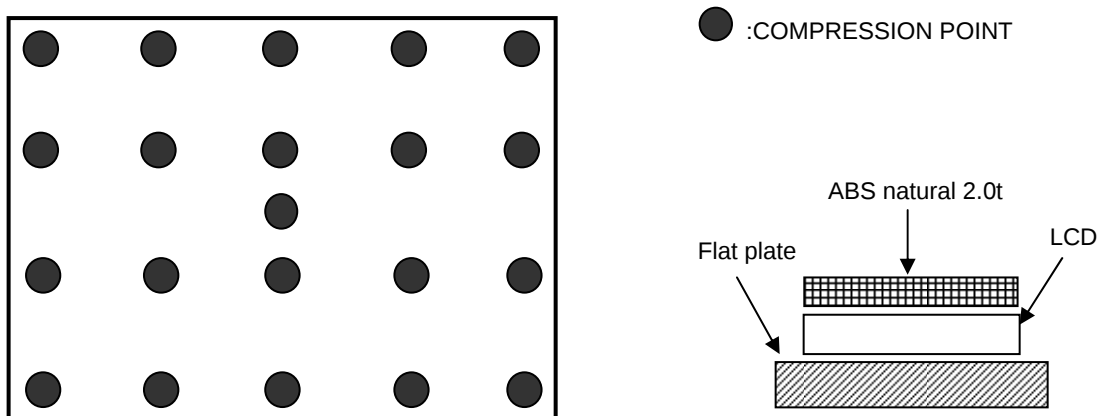

[Fig 1-2]

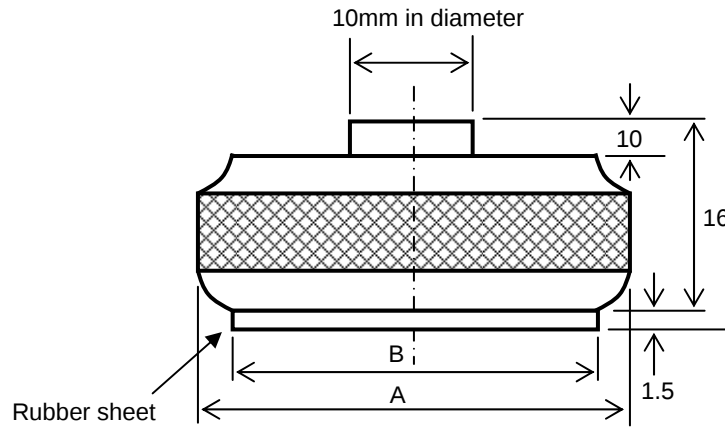

[Fig 1-3]

(3) Dimension of the compression jig


(a) compression jig for front side A = 16 mm in diameter

B = 16 mm in diameter

(b) compression jig for rear side A = 30 mm in diameter

B = 28 mm in diameter

Note 2) LCD fixing condition for z direction.

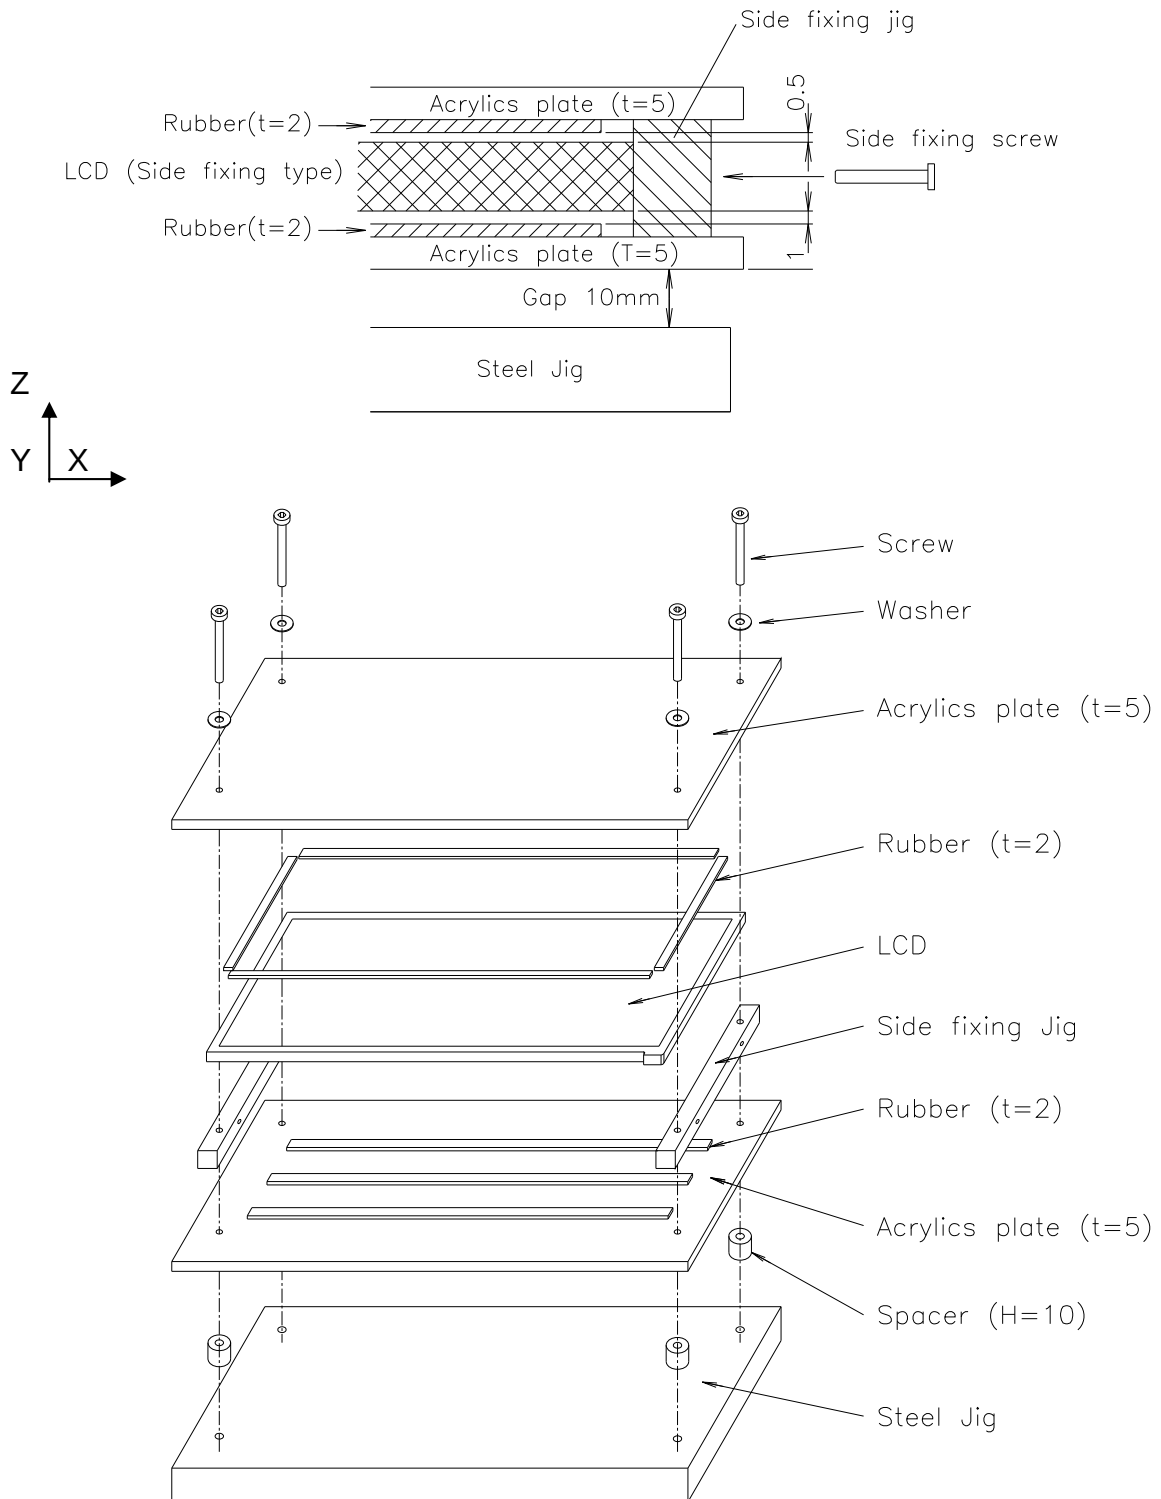

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

3.4. The Others

(1) Static electricity pressure resistance

Item	Testing conditions	Operation	Non Operation
Contact discharge	150pF, 330 ohm	±8KV	± 10 kV
Air discharge	150pF, 330 ohm	±15KV	±20 KV

(2) Sound noise

There should be no uncomfortable noise.

Being used under whatever surrounds, when power on/off, the panel should not generate uncomfortable noise. And regarding specified values are negotiated if it is needed.

(3) Open / Short

No smoke, no fiery at any open/ short test

(4) MTBF : 50,000 Hr (except for backlight LED)

4. Optical Characteristics

4.1. Test Conditions

Ambient Temperature : Ta 25±5°C

Ambient Humidity : Ha 65±20%RH

Supply Voltage : VDD 3.3V

Input Signal : According to typical value in "Electrical Characteristics"

LED Driver Supply Voltage : VLED = 12V

LED PWM Duty : PWM = 100%

The measuring method is shown in 4.2. The following items are measured under stable conditions. The optical characteristics should be measured in a dark room (Screen illuminance < 2 lx) or equivalent state with the methods shown in Note (6).

4.2. Optical Specifications

Item		Symbol	Conditions		Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center 1 Point)		CR			500	-	-	-	(2), (6)
Response Time		$t_{ON}+t_{OFF}$			-	35	50	ms	(3)
		t_{ON}			-	17.5	25	ms	
		t_{OFF}			-	17.5	25	ms	
Average luminance (5 Point Average)		Y_L	$\theta=0^{\circ}, \phi=0^{\circ}$		255	300	-	cd/m ²	*V _{LED} =12V D _{PWM} =100% Gray Scale Level = L63 (White)
Cross Modulation		D _{SHA}	Viewing normal angle		-	-	2.0	%	(5)
Luminance Uniformity Chromaticity	Red	Rx	Viewing normal angle		0.563	0.593	0.623	-	(1), (6) PR650 Only for Color Coordinate
		Ry			0.323	0.353	0.383		
	Green	Gx			0.305	0.335	0.365		
		Gy			0.540	0.570	0.600		
	Blue	Bx			0.125	0.155	0.185		
		By			0.085	0.115	0.145		
	White	Wx			0.283	0.313	0.343		
		Wy			0.299	0.329	0.359		
Viewing Angle	Hor.	θ_L	CR>=10	$\phi = 180$	80	-	-	deg.	(Color Coordinate of the R,G,B is based on LGD's equipment, and Color Coordinate of the W is based on LGD's equipment)
		θ_R		$\phi = 0^{\circ}$	80	-	-		
	Ver.	θ_{up}		$\phi = 90^{\circ}$	80	-	-		
		θ_{Low}		$\phi = -90^{\circ}$	80	-	-		
	Hor.	θ_L	CR>=5	$\phi = 180$	85	-	-		
		θ_R		$\phi = 0^{\circ}$	-	-			
Ver.	θ_{up}	$\phi = 90^{\circ}$		85	-	-			
	θ_{Low}	$\phi = -90^{\circ}$		-	-				
13 Points White Variation		δW	$\theta=0^{\circ}, \phi=0^{\circ}$		-	1.4	1.6		(7)
13 Points CR Variation		δC_R	Viewing normal angle		-	-	3.0		(7)
White Variation		δL			-		2.0		(8)


Attach the LED current – Luminance characteristics. The range of LED current is shown in 3.2 (2)

A. Present CR Variation(13Point) Spec is based on PR-880 Equipment and can be changed by the measuring equipment.

Item	Gray level	Conditions	Min.	Typ.	Max.	Unit	Note
Normalized luminance at each gray level	63	$\theta=0^\circ, \phi=0^\circ$ Viewing normal angle	100	100	100	%	(1), (6) (Center 1 Point)
	55		60.40	73.30	87.30		
	47		32.60	49.30	66.60		
	39		18.50	32.10	48.50		
	31		9.00	18.60	31.50		
	23		3.56	10.00	19.25		
	15		0.80	4.04	9.93		
	7		0.02	0.82	3.88		
	0		0	0.11	0.69		

At normal viewing direction, during displaying the L0-L63 gray scale bar, luminance intensity inversion can not be seen.

Note 1) Definition of viewing angle θ and ϕ

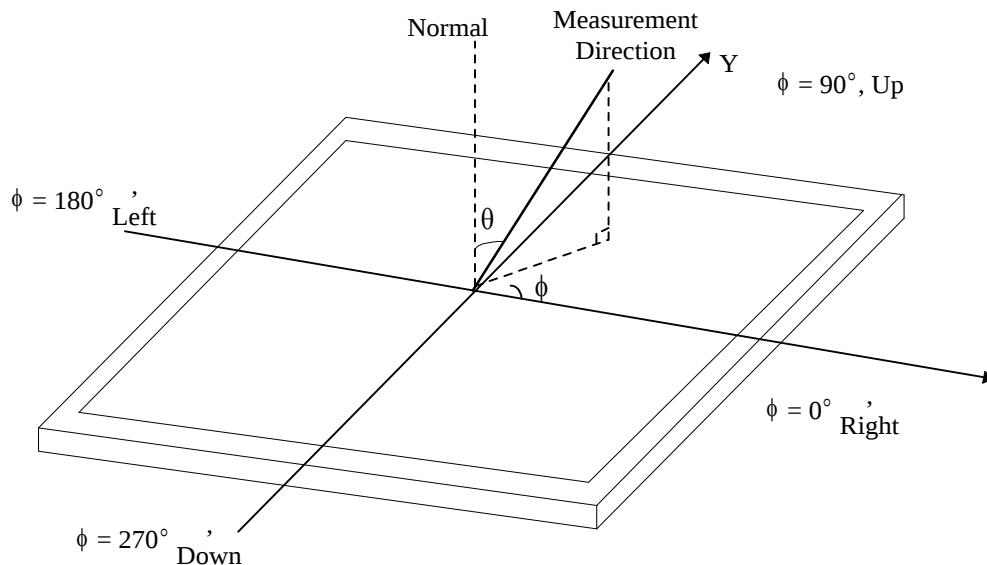

Note 2) LCD fixing condition for z direction.

The contrast ratio can be calculated by the following expression.


$$\text{Contrast Ratio (CR)} = L63 / L0$$

L63 : Luminance on the white raster (gray scale level L63)

L 0 : Luminance on the black raster (gray scale level L0)

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

Note 3) Definition of response time

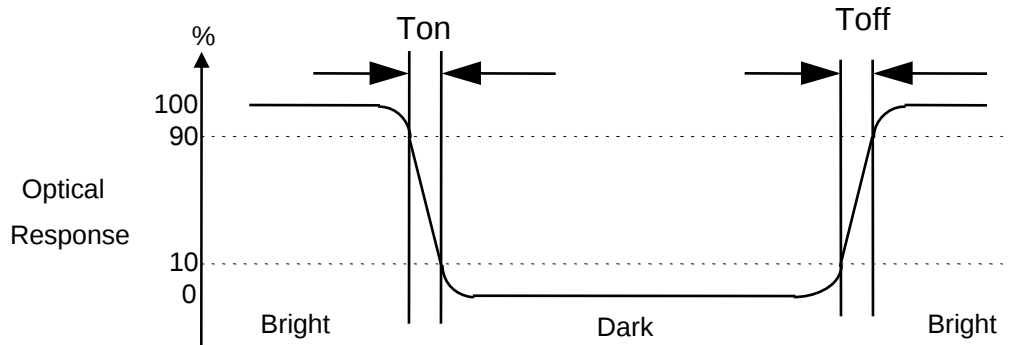

Note 4) Definition of surface luminance of white

Measure the luminance of white at Center point. Surface luminance of white Y_L


Note 5) Definition of Cross Modulation (D_{SHA})

$$D_{SHA} = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where:


Y_A = Luminance of measured location without darkest gray pattern (cd/m^2)

Y_B = Luminance of measured location with darkest gray pattern (cd/m^2)

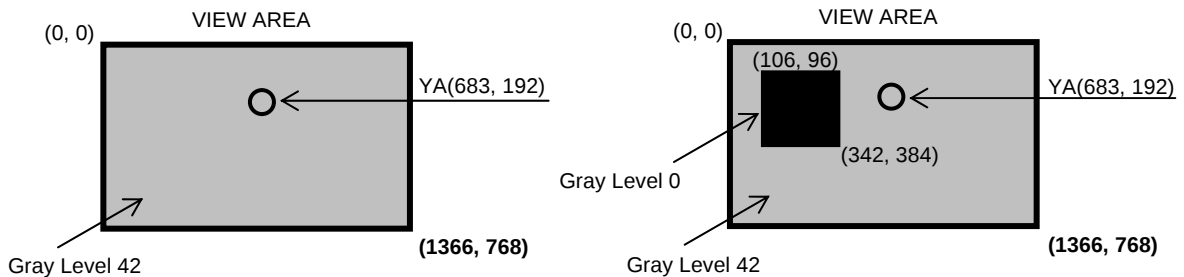

Note 6) Measuring setup


The measurement suppose to be executed after stabilized the panel at given temperature during 30 min. The measurement shall be executed 30 minutes after lighting at rating. The luminance of white should be typical luminance (Typical Condition IL=6.0mA). In order to stable the luminance, LCD s hall not be got winds.

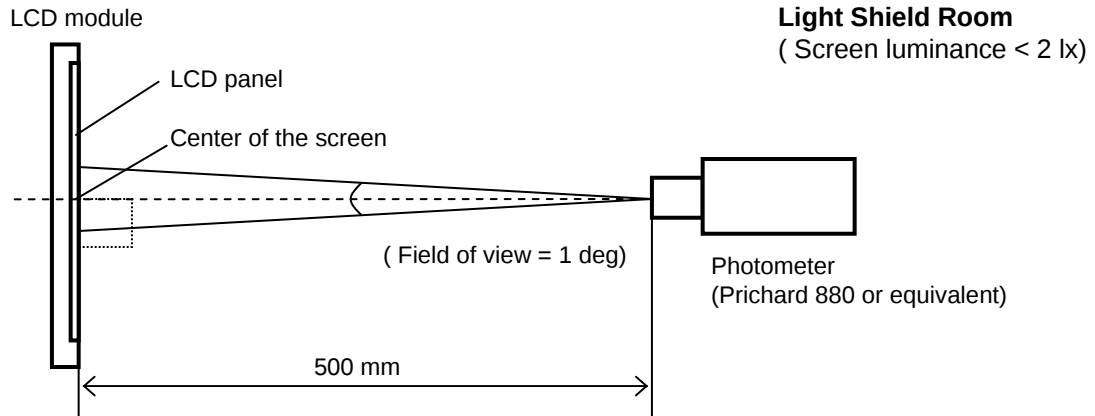

Note 7) Definition of 13 points white variation δW , CR variation δC_R

δW = Maximum luminance of 13 points / Minimum luminance of 13 points

δC_R = Maximum CR 13 points / Minimum CR of 13 points

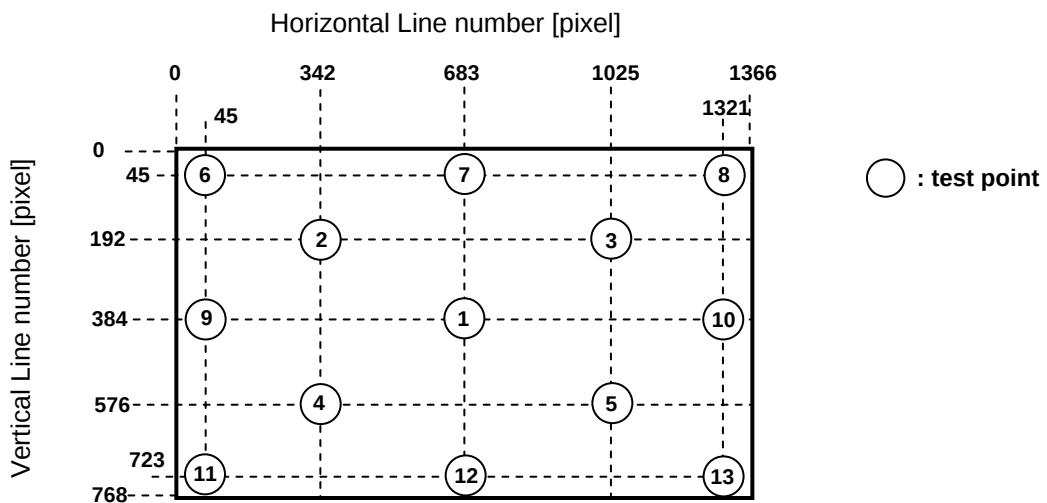


HY-LINE Computer Components / www.hy-line.de/computer


Note 8) Definition of White Variation dL : measure the luminance of white at 13 ×11 points.

$$dL = [| L(x,y) - L(x+l, y+j) | / (L(x,y) \times D(x+l, y+j))] \times 100 \text{ (%/mm)}$$

where $2 \leq x \leq 15$, $2 \leq y \leq 11$, $l = \pm 1$, $j = \pm 1$

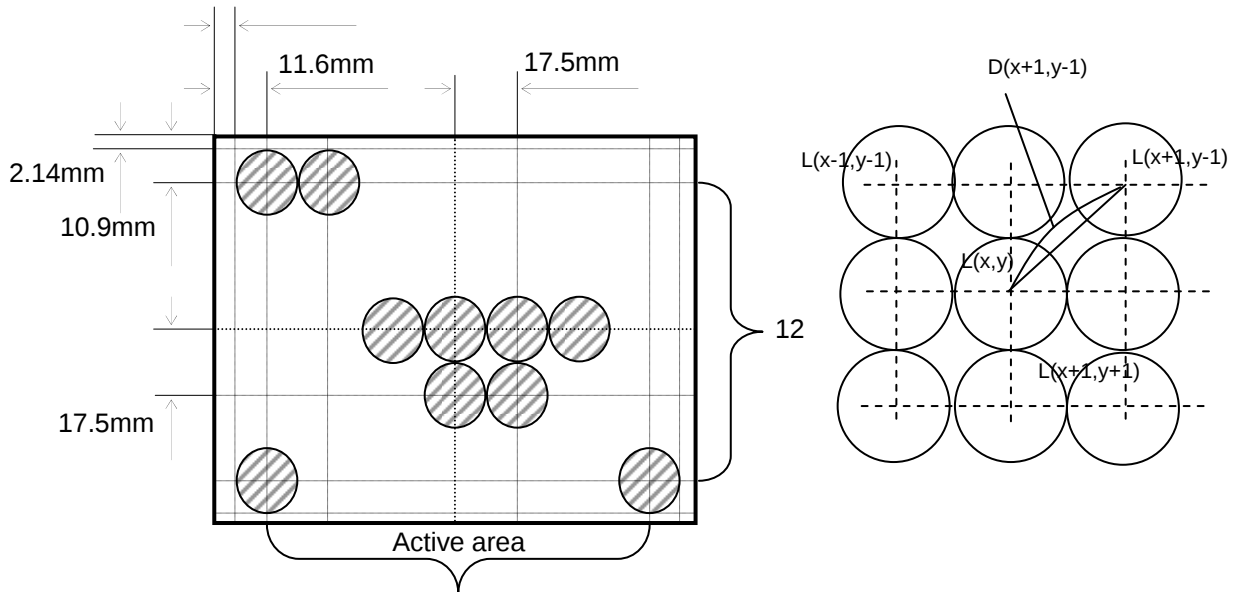

Measuring Spot 16
(Field of View : 2deg. Measuring Distance : 500 mm)

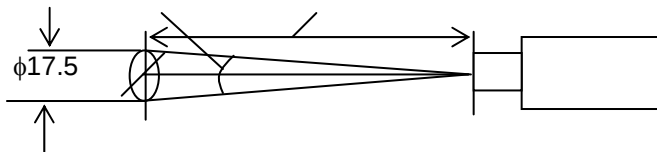

5. Electrical Characteristics

5.1. TFT LCD module

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	3.0	3.3	3.6	V	
Differential Input Threshold Voltage	High	V_{th}		-	+100	mV	
	Low	V_{tl}	-100	-	-	mV	
Rush Current		I_{RUSH}	-	-	1.5	A	(5)
Power Supply Current	Black	I_{DD}	153	180	207	mA	(3), (4) (a)
	Mosaic		214	252	290		(3), (4) (b)
	Max. Pattern		276	325	374		(3), (4) (c)

Note 1) The module should be always operated within these ranges. The "Typ." shows the recommendable value.


Note 2) Recommended LVDS transmitter : SN75LVDS84 (made by TI)

LVDS receiver included in this module is SW0632.(1 chip)


Note 3) Typical condition as follows. : fV= 60Hz, fDCLK = 74.6 MHz, V_{DD} = 3.3V, DC current.

Note 4) Power dissipation check pattern.


(a) Black pattern

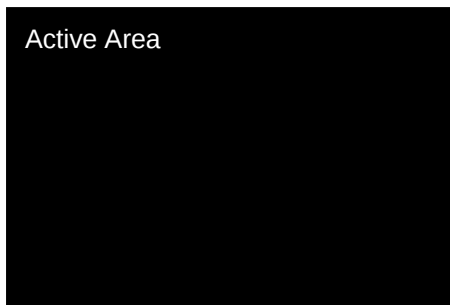


(b) Mosaic pattern

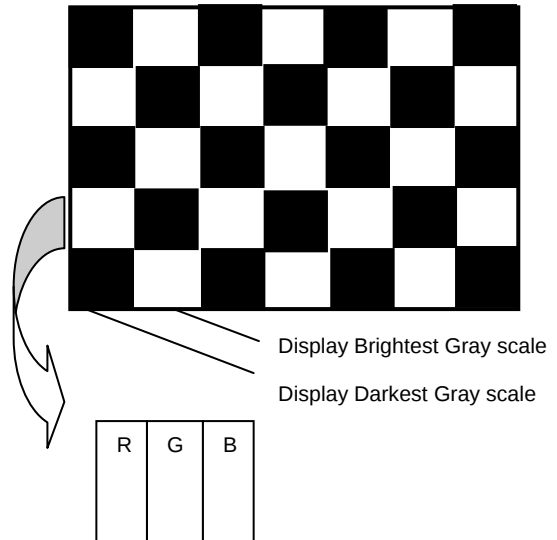


(c) Max. pattern (White)

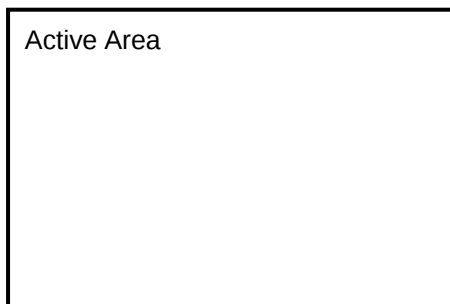

Note 5) Measuring condition of rush current.

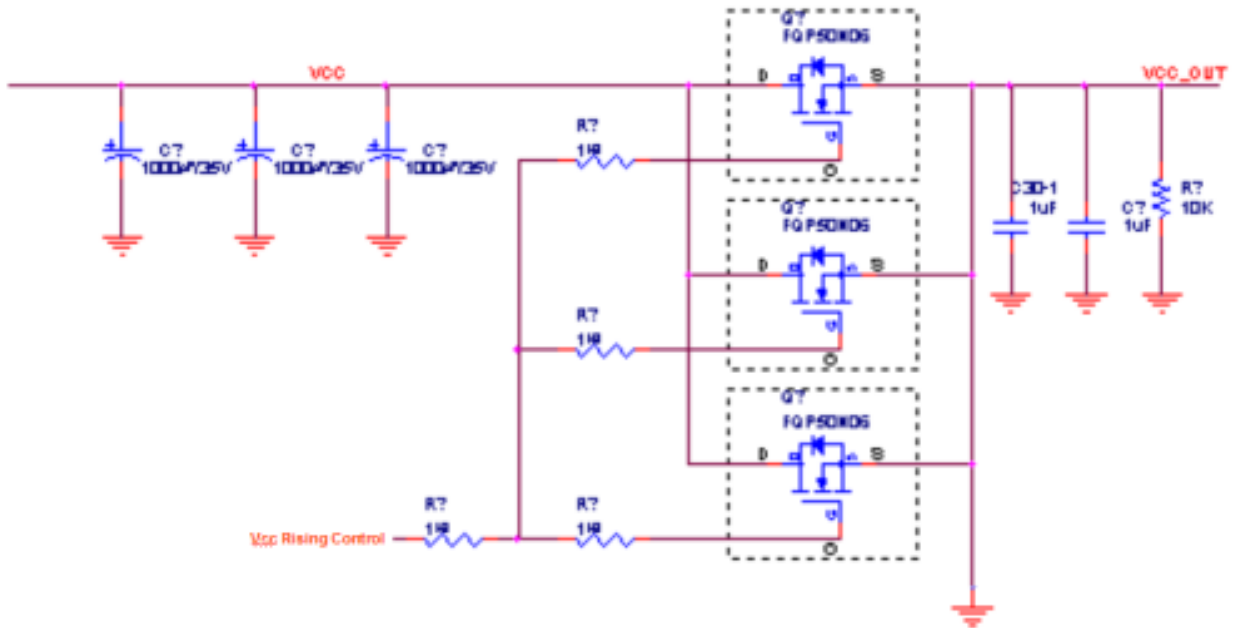

V_{DD} rising time is 500us

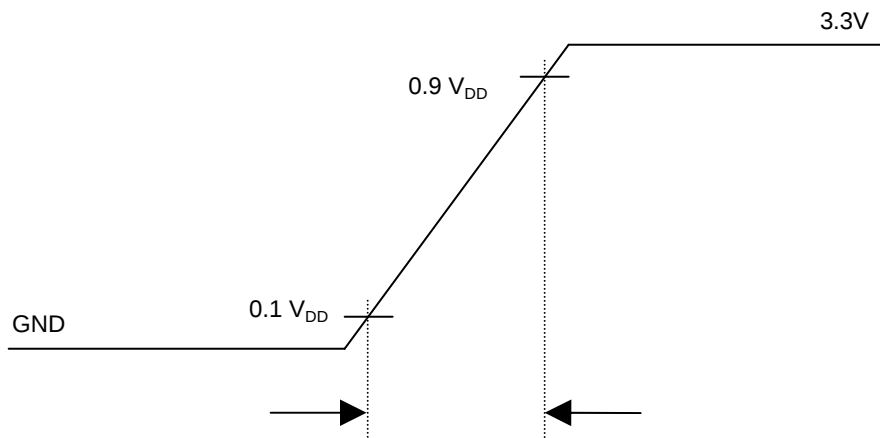


HY-LINE Computer Components / www.hy-line.de/computer

5.2. Backlight Unit

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
BACKLIGHT : (with LED Driver)						
LED Power Input Voltage	V_{LED}	7.0	12.0	21.0	V	1
LED Power Input Current	I_{LED}	-	292	336	mA	2
LED Power Consumption	P_{LED}	-	3.5	4.1	W	3
LED Power Inrush Current	I_{LED_P}	-	-	2000	mA	4
PWM Duty Ratio		5	-	100	%	5
PWM Jitter	-	0	-	0.1	%	6
PWM Impedance	Z_{PWM}	20	40	60	k Ω	
PWM Frequency	F_{PWM}	200	1000	2000	Hz	7
PWM High Level Voltage	V_{PWM_H}	2.2	-	5.3	V	
PWM Low Level Voltage	V_{PWM_L}	0	-	0.3	V	
LED_EN Impedance	Z_{PWM}	20	40	60	k Ω	
LED_EN High Voltage	$V_{LED_EN_H}$	2.2	-	5.3	V	
LED_EN Low Voltage	$V_{LED_EN_L}$	0	-	0.3	V	
Life Time		12,000	-	-	Hrs	8

1. This impedance value is needed for proper display and measured from LVDS Tx to the mating connector.
2. The measuring position is the connector of LCM and the test conditions are under 25°C.
3. The current and power consumption with LED Driver are under the $V_{LED} = 12.0V$, 25°C, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).
4. The below figures are the measuring V_{LED} condition and the V_{LED} control block LGD used.
 V_{LED} control block is same with V_{CC} control block.

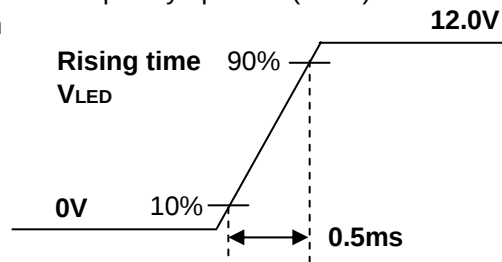

5. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
6. If Jitter of PWM is bigger than maximum, it may induce flickering.
7. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
8. The life time is determined as the time at which the typical brightness of LCD is 50% compare to that of initial value at the typical LED current. These LED backlight has 4 strings on it and the typical current of LED's string is base on 29.3mA.

5.3. Regulation

The set (which LCD module is assembled into) should conform to the regulations below.

(1) EMC Regulations.

- a) ANSI C63.4
- b) CISPR 22
- c) CISPR 13

(2) Safety Regulations (Only LCD)

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).

(3) Environment

- a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003


(4) Material list concerning

Item		Silk	Product	Rating	Maker
TCON	Power V _{cc} (2.5V)	UC1	TCON	2.5V	Siliconworks
DC/DC	Control IC for Power supply	US1	RT9995	RT9995B, RICHTEK, NOTEBOOK, BOOST+LDO+PVCOM+OPAMP+GPM+D/C, WQFN, R/TP, 28 DC/DC Switching frequency (640Khz ~ 1200Khz)	RICHTEK
	Switching Diode	D2, D3, D4	DAN217U		DIODES
	Schottky Barrier Diode	D5	BAT750-7-F	0.75A	DIODES
	Inductor	L2	NRS6010T100M0	10 uH±20% (Inductance) 0.270Ω±20% (DC Resistance) 1.00A Max (Rated DC Current)	KTY
LED Driver	Control IC for LED	US2	SW5517	SW5517, SILICON WORKS, 24V, 4CH, 2.17W, QFN, R/TP, 20, NBPC	Siliconworks
	Inductor	L1	NRS6010T100M0	10 uH±20% (Inductance) 0.270Ω±20% (DC Resistance) 1.00A Max (Rated DC Current)	KTY

6. Block Diagram

The LP125WH2 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 12.5 inches diagonally measured active display area with HD resolution (1366 horizontal by 768 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP125WH2 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP125WH2 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP125WH2 characteristics provide an excellent flat display for office automation products such as Notebook PC.

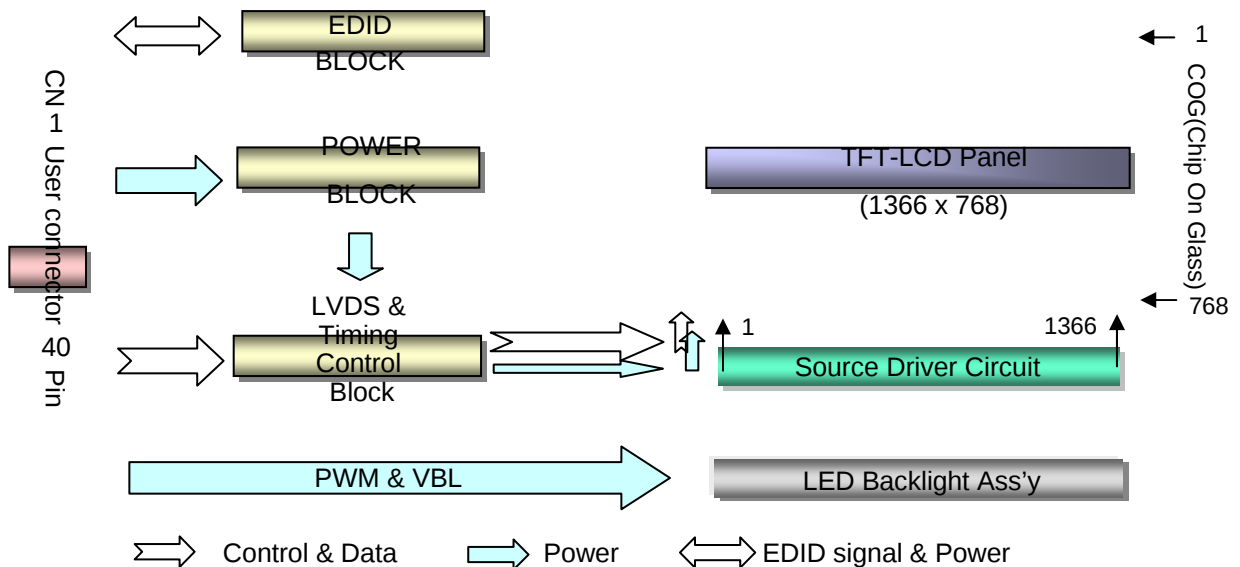


7. Input Terminal Pin Assignment

7.1. TFT LCD module

This LCD employs two interface connections, a 40 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	NC	No Connection	[Interface Chip] 1. LCD : SiW, SW0632 (LCD Controller) Including LVDS Receiver. 2. System : * Pin to Pin compatible with LVDS [Connector] LSC GT05Q-40S-H10 or equivalent [Mating Connector] 20345-#40E-## series or equivalent [Connector pin arrangement]  [LCD Module Rear View]
2	VCC	LCD Logic and driver power (3.3V Typ.)	
3	VCC	LCD Logic and driver power (3.3V Typ.)	
4	V EEDID	DDC Power (3.3V)	
5	NC	No Connection	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	ORX0-	Negative LVDS differential data input	
9	ORX0+	Positive LVDS differential data input	
10	GND	LCM Ground	
11	ORX1-	Negative LVDS differential data input	
12	ORX1+	Positive LVDS differential data input	
13	GND	LCM Ground	
14	ORX2-	Negative LVDS differential data input	
15	ORX2+	Positive LVDS differential data input	
16	GND	LCM Ground	
17	ORXC-	Negative LVDS differential clock input	
18	ORXC+	Positive LVDS differential clock input	
19	GND	LCM Ground	
20	NC	No Connection	
21	NC	No Connection	
22	GND	LCM Ground	
23	NC	No Connection	
24	NC	No Connection	
25	GND	LCM Ground	
26	NC	No Connection	
27	NC	No Connection	
28	GND	LCM Ground	
29	NC	No Connection	
30	NC	No Connection	
31	GND	LCM Ground (LED Backlight Ground)	
32	GND	LCM Ground (LED Backlight Ground)	
33	GND	LCM Ground (LED Backlight Ground)	
34	NC	No Connection	
35	PWM	System PWM Signal input for dimming	
36	LED_EN	LED Backlight On/Off	
37	NC	No Connection	
38	VLED	LED Backlight Power (7V-21V)	
39	VLED	LED Backlight Power (7V-21V)	
40	VLED	LED Backlight Power (7V-21V)	

7.3. LVDS Transmitter

LVDS Transmitter : SN75LVDS84 (made by TI) or compatible.

Pin #	Pin Name	Require Signals	Pin #	Pin Name	Require Signals
1	D4	R4	48	D3	R3
2	Vcc	Vcc	47	D2	R2
3	D5	R5	46	GND	GND
4	D6	G0	45	D1	R1
5	DND	GND	44	D0	R0
6	D7	G1	43	NC	NC
7	D8	G2	42	LVDS GND	LVDS GND
8	Vcc	Vcc	41	Y0M	A0M
9	D9	G3	40	Y0P	A0P
10	D10	G4	39	Y1M	A1M
11	GND	GND	38	Y1P	A1P
12	D11	G5	37	LVDS Vcc	LVDS Vcc
13	D12	B0	36	LVDS GND	LVDS GND
14	NC	NC	35	Y2M	A2M
15	D13	B1	34	Y2P	A2P
16	D14	B2	33	CLKOUTM	CLKM
17	GND	GND	32	CLKOUTP	CLKP
18	D15	B3	31	LVDS GND	LVDS GND
19	D16	B4	30	PLL GND	PLL GND
20	D17	B5	29	PLL Vcc	PLL Vcc
21	Vcc	Vcc	28	PLL GND	PLL GND
22	D18	HSYNC	27	SHDN	SHDN
23	D19	VSYNC	26	CLKIN	Dclk
24	GND	GND	25	D20	DE(Data Enable)

7.4. Timing Diagrams of LVDS Transmission

Switching Characteristic

VCC = 3.0 ~ 3.6V, Ta = -10 ~ +70°C

Transmitter

Symbol	Parameter	Min.	Typ.	Max.	Unit
tTCIT	CLK IN Transition Time	-	-	5	ns
tTCP	CLK IN Period	14.7	T	32.4	ns
tTCH	CLK IN High Time	0.4T	0.5T	0.6T	ns
tTCL	CLK IN Low Time	0.4T	0.5T	0.6T	ns
tTCD	CLK IN to TCLK +/- Delay	-	14.2	-	ns
tTS	TTL Data Setup to CLK IN	3.0	-	-	ns
tTH	TTL Data Hold from CLK IN	1.5	-	-	ns
tLVT	LVDS Transition Time	0.26	0.7	1.5	ns
tTOP1	Output Data Position 0 (T= 15.38ns)	-0.2	0	0.2	ns
tTOP0	Output Data Position 1 (T= 15.38ns)	T/7 - 0.2	T/7	T/7 + 0.2	ns
tTOP2	Output Data Position 2 (T= 15.38ns)	2T/7 - 0.2	2T/7	2T/7 + 0.2	ns
tTOP3	Output Data Position 3 (T= 15.38ns)	3T/7 - 0.2	3T/7	3T/7 + 0.2	ns
tTOP4	Output Data Position 4 (T= 15.38ns)	4T/7 - 0.2	4T/7	4T/7 + 0.2	ns
tTOP5	Output Data Position 5 (T= 15.38ns)	5T/7 - 0.2	5T/7	5T/7 + 0.2	ns
tTOP6	Output Data Position 6 (T= 15.38ns)	6T/7 - 0.2	6T/7	6T/7 + 0.2	ns
tTPLL	Phase Lock Loop Set	-	-	10	ns

[illegible]

7.5. Input Signal, Basic Display Colors and Gray Scale of each Color

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB			LSB			MSB			LSB			MSB			LSB		
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...	...						...						...					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...	...						...						...					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...	...						...						...					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note 1) 0: Low level voltage, 1: High level voltage

8. Interface Timing

8.1 Timing Parameters


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	68.7	74.6	76.2	MHz
Hsync	Period	T_{hp}	1490	1578	1884	tCLK
	Width	t_{WH}	32	32	32	
	Width-Active	t_{WHA}	1366	1366	1366	
Vsync	Period	t_{VP}	779	790	801	tHP
	Width	t_{WV}	2	5	8	
	Width-Active	t_{WVA}	768	768	768	
Data Enable	Horizontal back porch	t_{HBP}	59	132	438	tCLK
	Horizontal front porch	t_{HFP}	33	48	48	
	Vertical back porch	t_{VBP}	6	15	20	tHP
	Vertical front porch	t_{VFP}	1	2	5	


Appendix) All reliabilities are specified for timing specification based on refresh rate of 60 Hz.

Even though actual performance in 50Hz and 40Hz for low power is displayed normally, remark and inform to user that display quality in 40 Hz and 50 Hz is out of guarantee range.

Condition : VCC =3.3V

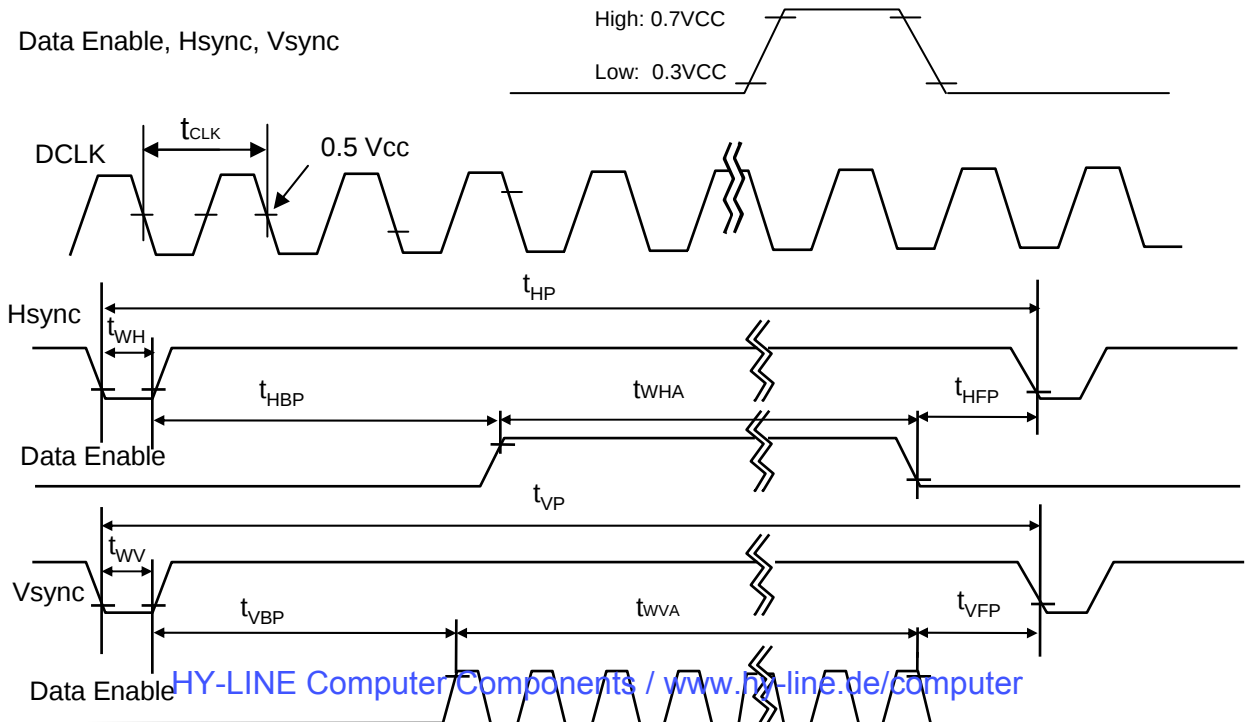

8.3. Power On / Off Sequence

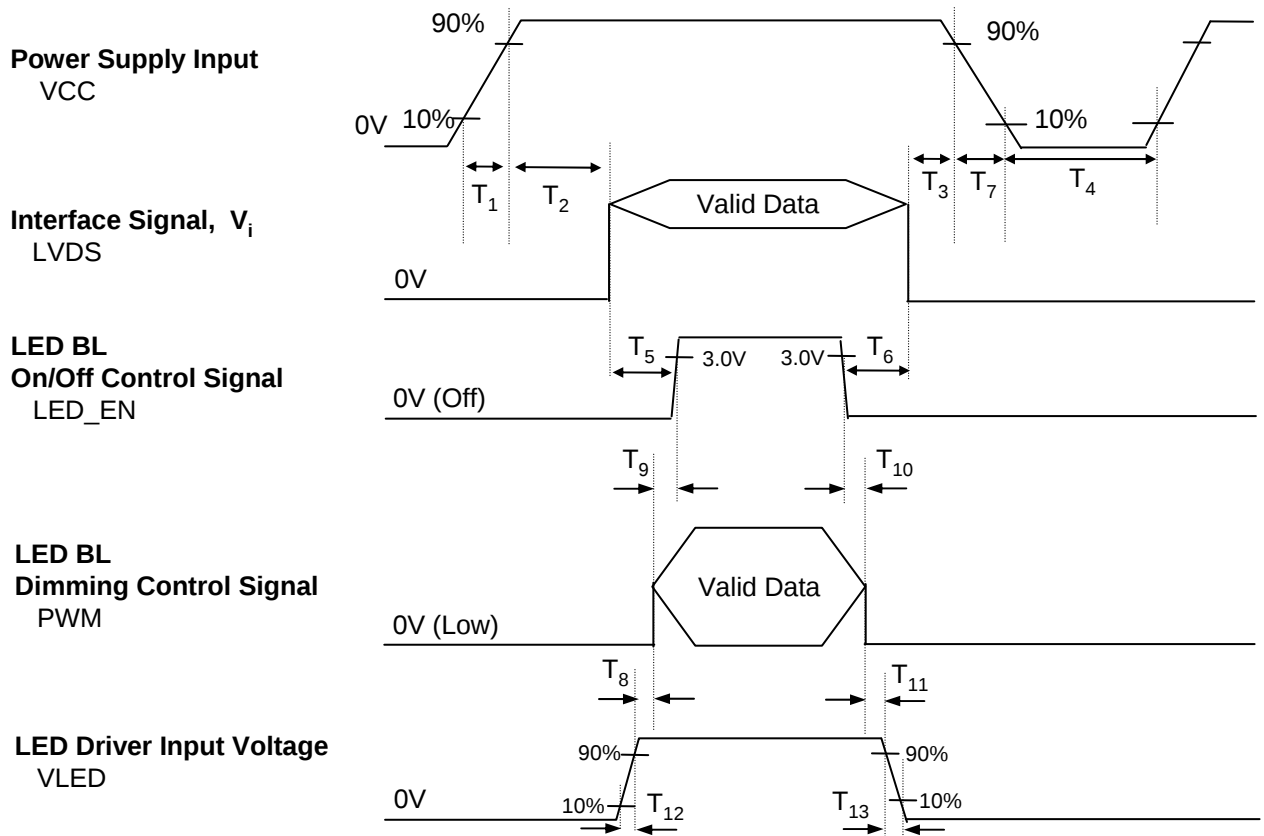

Logic Parameter	Value			Units
	Min.	Typ.	Max.	
T ₁	0.5	-	10	ms
T ₂	0	-	50	ms
T ₃	0	-	50	ms
T ₄	400	-	-	ms
T ₅	200	-	-	ms
T ₆	200	-	-	ms
T ₇	3	-	10	ms

LED Parameter	Value			Units
	Min.	Typ.	Max.	
T ₈	10	-	-	ms
T ₉	0	-	-	ms
T ₁₀	0	-	-	ms
T ₁₁	10	-	-	ms
T ₁₂	0.5	-	-	ms
T ₁₃	0	-	5000	ms

Note)

- Do not insert the mating cable when system turn on.
- Valid Data have to meet "3-3. LVDS Signal Timing Specifications"
- LVDS, LED_EN and PWM need to be on pull-down condition on invalid status.
- LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

9. Cosmetic Specification

9.1. Sampling

A.Q.L (Acceptable Quality Level): MIL-STD, 105E Level II,
Major: 0.65 , Minor: 1.5

9.2. Conditions of Inspections

- (1) Ambient Temperature : $25 \pm 5^{\circ}\text{C}$
- (2) Ambient Humidity : $65 \pm 20\% \text{RH}$
- (3) Illumination : 200 – 500 Lux (nominal 350 Lux) under the fluorescent Lamp.
- (4) Viewing Distance: Approximately 30cm by the eyes of the inspector from the module
- (5) Viewing angle : The surface of the module and the inspector's line shall be at 90 ± 45 degrees.
- (6) Display pattern: Pure Red, Green, Blue, Black, White, Gray level 0 - 63

9.3. Defect modes





Defect Mode	Description
Dark / Bright spots	Points on the display which appear dark / bright and remain unchanged in size
Dark / Bright lines	Lines on the display which appear dark / bright and remain unchanged in size
Polarizer scratch	When the unit is lit a light , line is seen across a darker background; line does not vary in size
Polarizer dent	When the unit is lit a light, light (white) spots appear against a darker background, and do not vary in size
Bright / dark dot	A sub-pixel (R,G,B dot) stuck off / on
Rubbing line	Diagonal lines that appear gray with the display patterns dark and vary in size
Dim line	When the unit lights, lines in the minor (Vertical) or major (Horizontal) axis appear dim
Cross line	When the unit lights, lines in the both minor and major axis do not appear
Interference	Interference can not be seen with any bright plane display at any viewing angle
Flicker	When displaying sub-pixel checker(gray level and darkest gray), flicker can not be seen
Ripple (Pooling)	Tapping Test, Tapping area : All bezel(Metal cover) side, LCD: Full-screen gray (L32) "Ripple (Pooling)" can not be seen in Active Area

9.4. Mechanical Inspection

- (1) Light leakage: No light leakage between metal chassis (bezel) and glass
- (2) No sharp edge
- (3) The mounting holes: No Changed (Side fixed type)
- (4) PCB Appearance: No pattern peeling snapping / No electrically short
If there are repair portions, the repair portions on PCB is covered by epoxy resign
- (5) Soldering: No cold solder joint, lead move when pulled
- (6) Bezel, Frame, Connectors: No distinct stain, rust or scratch, no pin bending

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

9.5. Visual Inspection

Defect type	Count (mm)	Reject (mm)
Dark / bright spot 	$0.2 < D \leq 0.5$ $N \leq 3$	$D > 0.5$
Dark / Bright lines 	$0.05 < W \leq 0.1$ $0.3 < L \leq 3.0$ $N \leq 3$	$W > 0.1$ $L > 3.0$
Polarizer scratch 	$0.01 < W \leq 0.1$ $0.3 < L \leq 0.5$ $N \leq 3$	$W > 0.1$ $L > 0.5$
Polarizer dent / bubble 	$0.2 \leq D \leq 0.5$ $N \leq 3$	$D > 0.5$
Maximum allowable number of defects	$N \leq 7$	$N > 7$
Rubbing defect	Not allowed	
Dim line	Not allowed	


[D : diameter, W : width, L : length, N : count]

Note 1) Inspection area should be within bezel opening.

Note 2) Dusts which are bigger not less than 0.10mm ($0.1 \leq W$) shall be judged by "Average Diameter".

Note 3) Scratches which are bigger not less than 0.05mm ($0.05 \leq W$) shall be judged by "Average Diameter".

Average Diameter $D = (a+b)/2$ (mm)




9.6. Electrical Inspection

(1) Dot defect


Defect type		Count	Reject
Bright dots	Random	$N \leq 2$	$N > 3$
	Two adjacent	Not allowed	
	Three or more adjacent	Not allowed	
Dark dots	Random	$N \leq 4$	$N > 5$
	Two adjacent	$N \leq 1$	$N > 2$
	Three or more adjacent	Not allowed	
Maximum allowable number of dot defect		$N \leq 5$	$N > 6$
Maximum distance between defects	Bright - to - bright dot	$L > 15.1\text{mm}$	$L \leq 15\text{mm}$
	Dark - to - dark dot	$L > 10.1\text{mm}$	$L \leq 10\text{mm}$

- 1) Inspection patterns for dot defect are Pure Red, Green, Blue, Black, and White.
- 2) Adjacent two dots will be counted as two dots.
- 3) The distribution of dot defects should be below. Average value of dot defects should be less than 1.

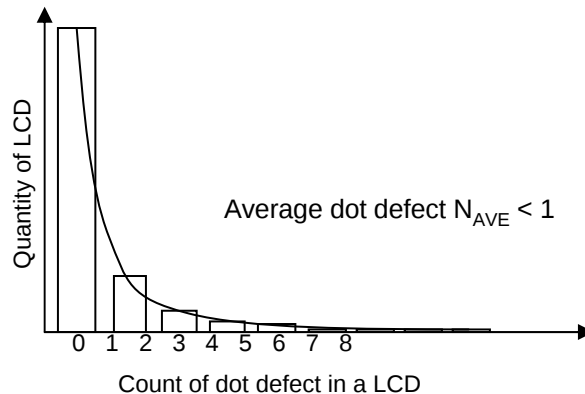

Required distribution of dot defect

- 4) The definition of 2 adjacent dots.

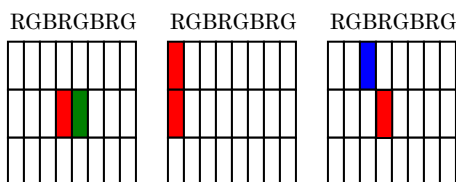


(2) Light leakage

Light leakage can not be seen between metal chassis (bezel) and glass when displaying black plane.

(3) Image sticking

Image sticking pattern shall not be to persist longer than 1second after displaying following pattern 8 hours in the room temperature condition.

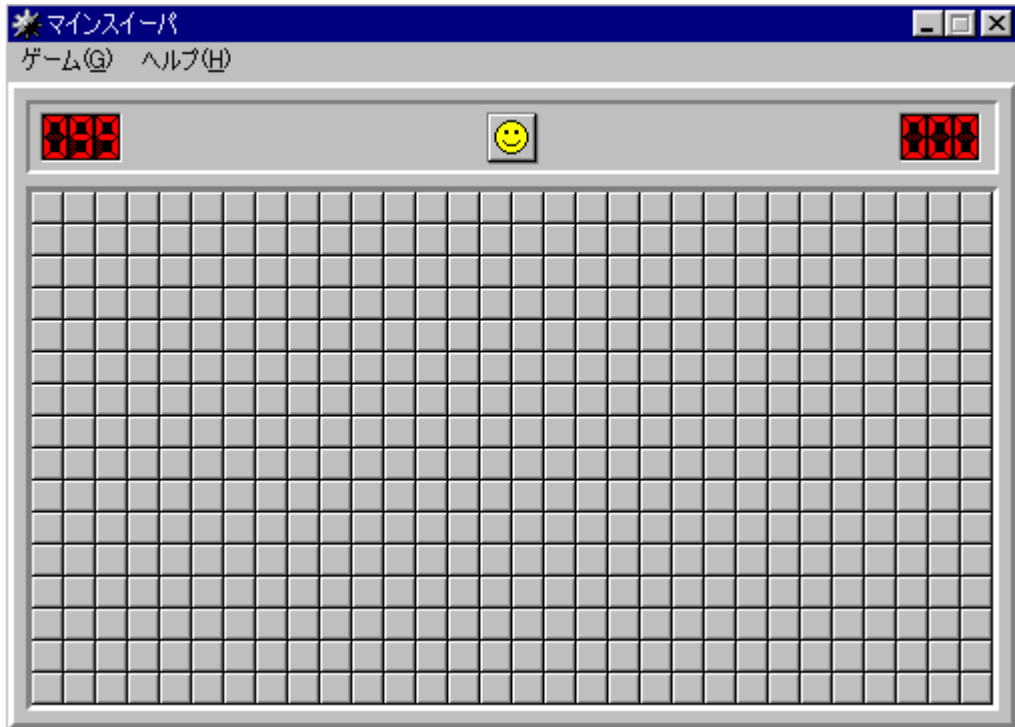

(4) Glue/stain/dirt

Glue, non-removable stain and dirt which are visible in the inspection area are not acceptable.

10. Packing

10.1. Carton

(1) Packing Form

Corrugated cardboard box and EPS Packing


(2) Packing Method

Packing Material : EPS (Expanded Polystyrene)

Packing Weight: : 1.3Kg

(1Box/30Module)

Packing weight, 30 pcs modules included :9.3kg

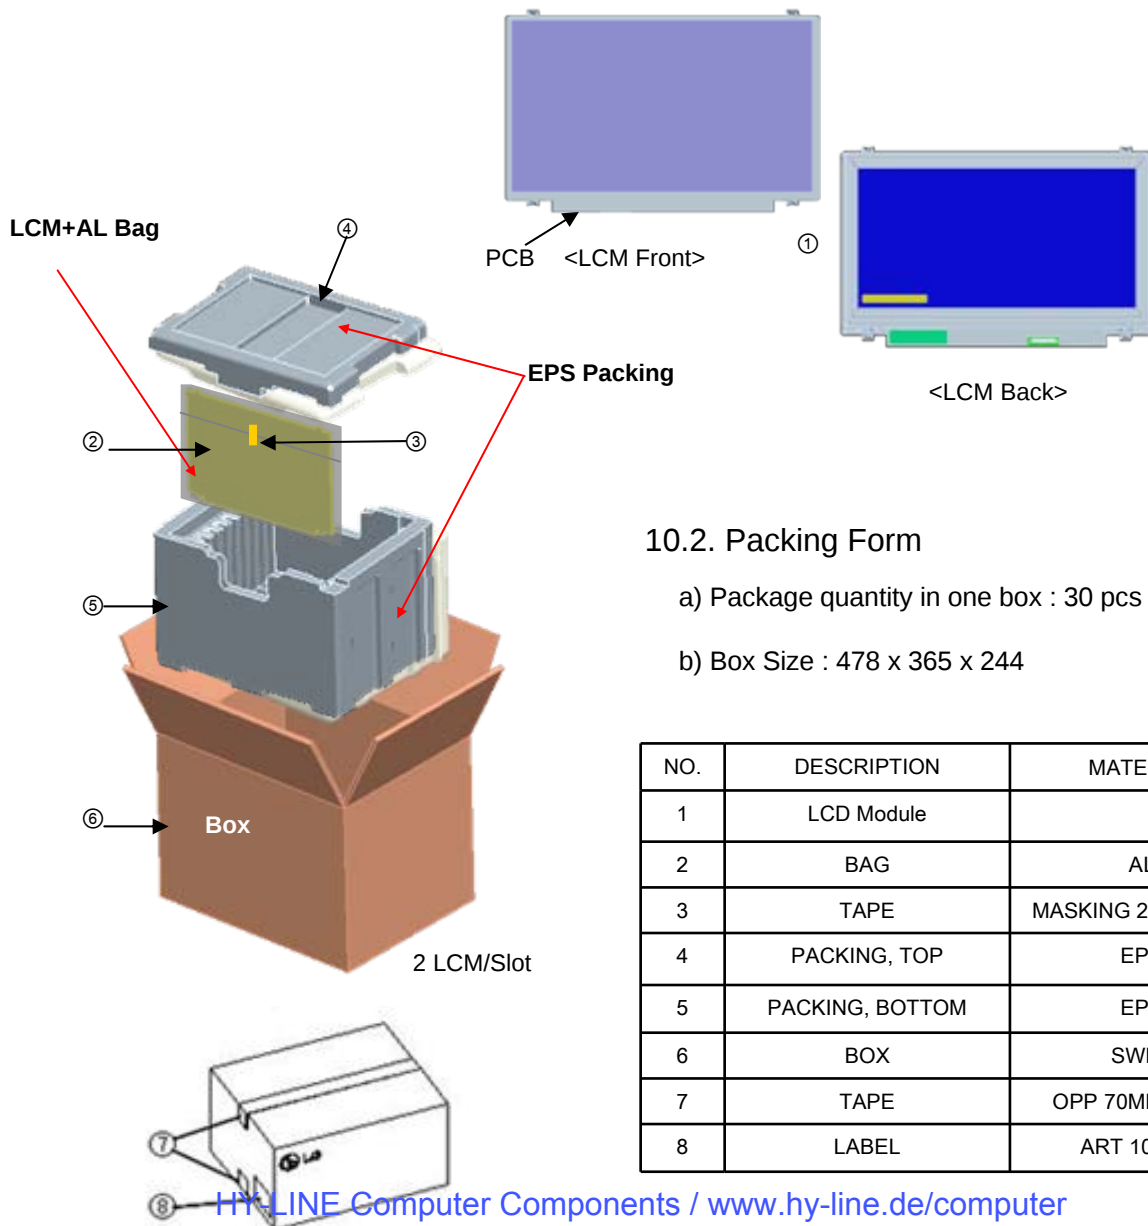

10.2. Packing Form

a) Package quantity in one box : 30 pcs

b) Box Size : 478 x 365 x 244

NO.	DESCRIPTION	MATERIAL
1	LCD Module	
2	BAG	AL
3	TAPE	MASKING 20MMX50M
4	PACKING, TOP	EPS
5	PACKING, BOTTOM	EPS
6	BOX	SWR4
7	TAPE	OPP 70MMX300M
8	LABEL	ART 100X70

(3) Packing Specification

Item	Conditions
Packing Vibration	Random=1.50Grms, Non-Operating LCM, To driving way / 1hr
Packing Drop Test	Refer to below table

Vibration frequency


Hz	G ² /Hz(PSD)
3	0.0001
10	0.0024
18	0.0024
27	0.02
54	0.02
100	0.0015
150	0.0015
200	0.01
250	0.01
300	0.01

(4) Package Label

Package label should be at least shown the following information.

- TOSHIBA code name(G33C00068110) which will be numbered by Toshiba
- Revision number which be numbered by LCD maker
- Quantity
- LCD maker
- Model number which be numbered by LCD maker
- Production Year / Month

(5) Location of Package label : 1 points (Side)

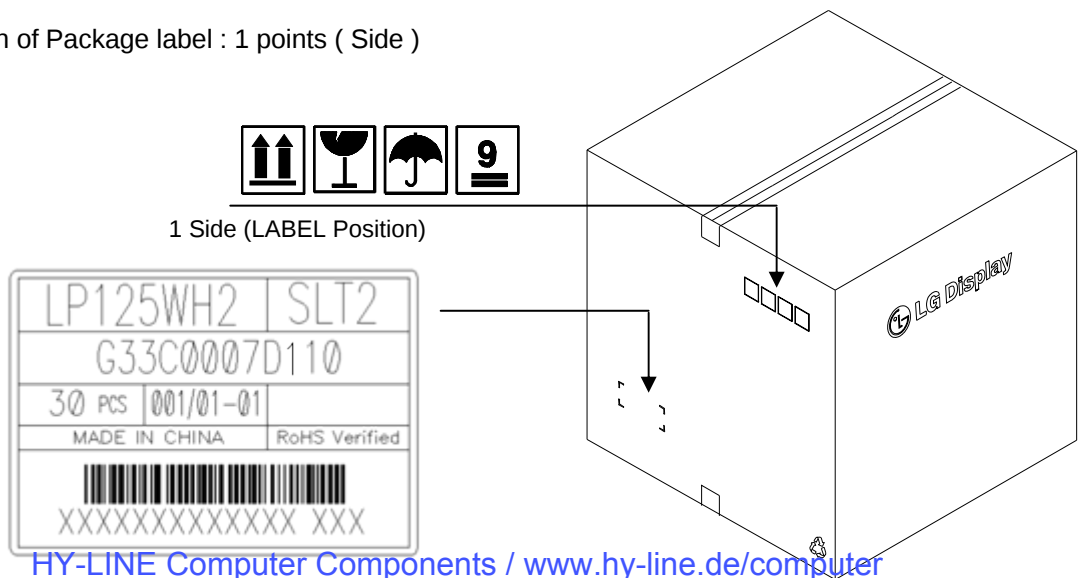

11. Labels and Other parts Exchange

11.1. LCD code Label on LCD

LCD code label should be at least shown the following information.

- (1) TOSHIBA code name (G33C0007D110) which will be numbered by Toshiba & Bar code
(Bar code : CODE-39 High-density)
- (2) LGPL Serial number CODE (numbered by LCD maker , less than equal 13 digits)

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)
E : MONTH

D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	B	C	D	E	F	G	H	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark


Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

11.2. Packing Form

- a) Package quantity in one box : 30 pcs
- b) Box Size : 478 x 365 x 244

Example >

LABEL : 78mm X 37mm

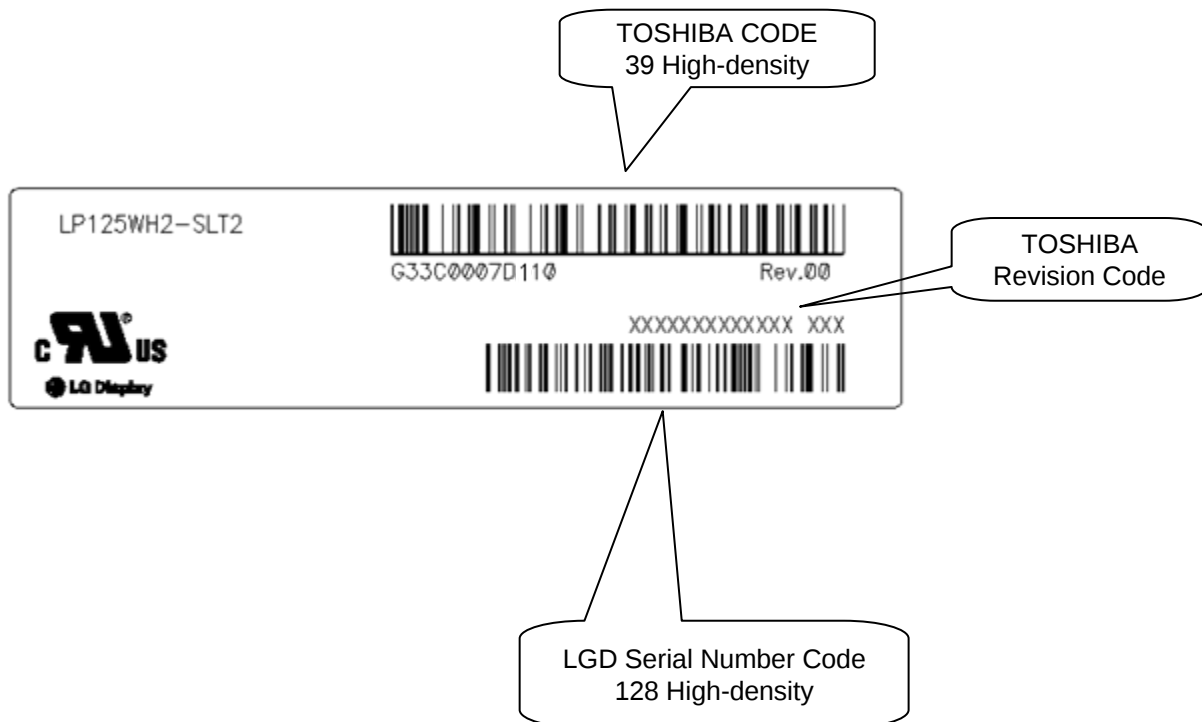

The revision code is inserted in the label by Toshiba request. If the contents of the specification need to be change under mass-production, the code can be revised after Toshiba's approval. Although there is not items in the contents of the specification, Toshiba can requests LGD to change the revision code.


11.2. Caution Texture and Labels on LCD



[Disposal of BL label]

HY-LINE Computer Components / www.hy-line.de/computer

11.3. Label Locations on LCD

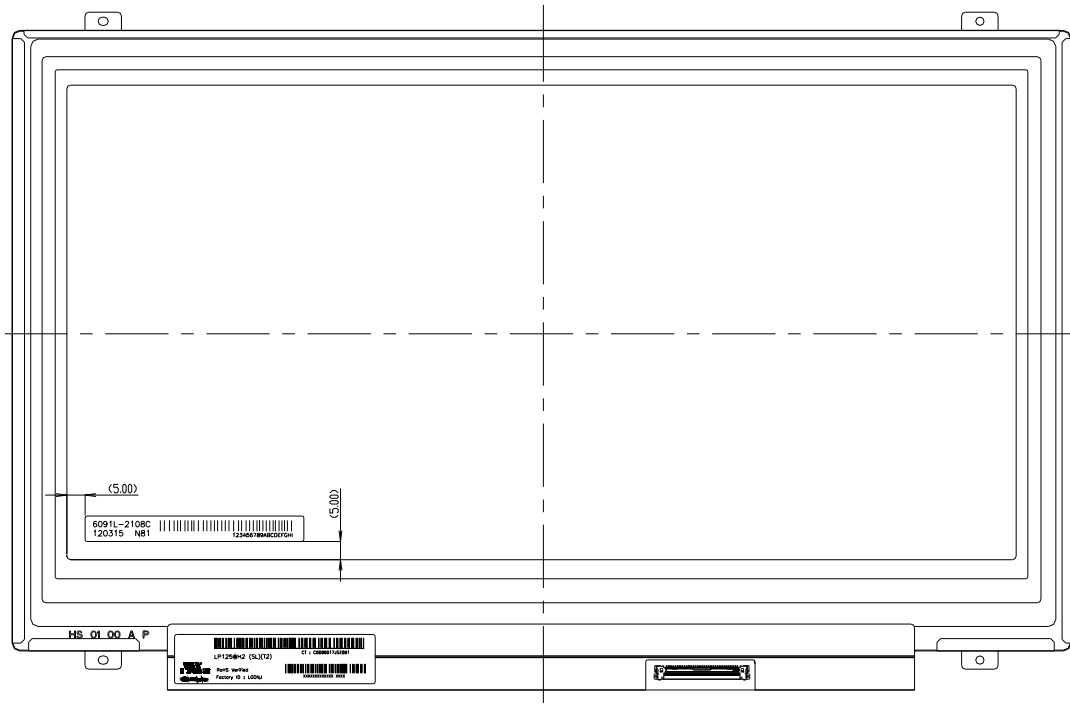


11.4. Others

(1) Backlight repair parts kit : 6091L-1238C


No.	Part	Product Code	Maker	Qt'y	Note
1	Plate Bottom	3300L-0332A		1	
2	Cover Shield(S)	3550S-1024A	Geo rim	1	
3	Cover Shield(T)	3550S-0910A	Geo rim	1	
4	Cover Shield(L,R)	3550S-0921B	Geo rim	2	
5	Tape Adhesive	7250L-0082A	Hwa sung	2	
6	LED	6915L-0070A	SSC	36	

(2) Package specification of Backlight repair parts kit


a) Individual packing

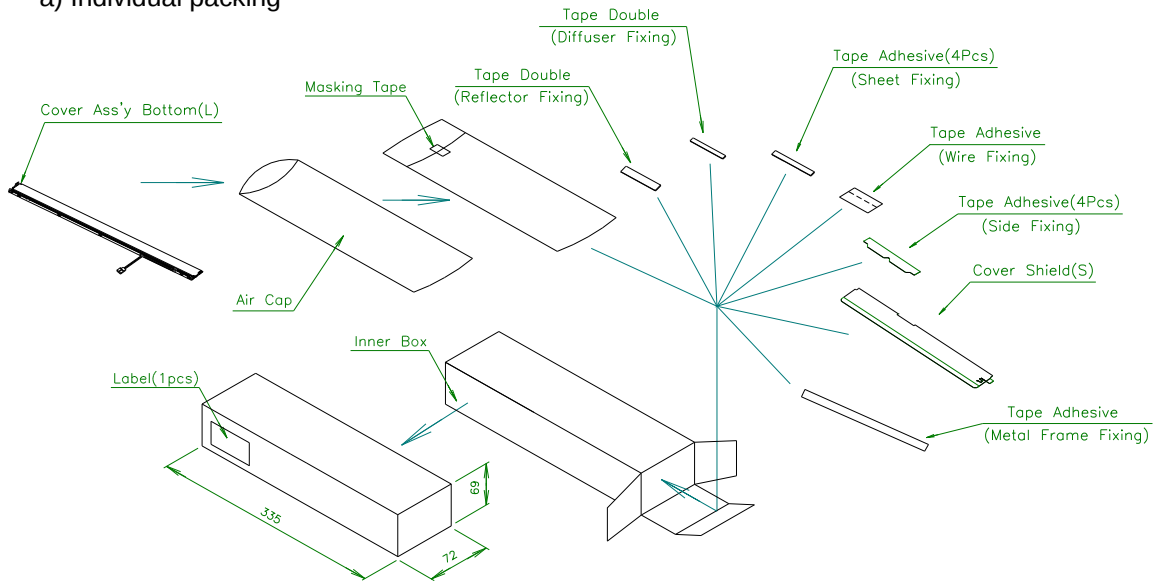

b) Master carton Packing method

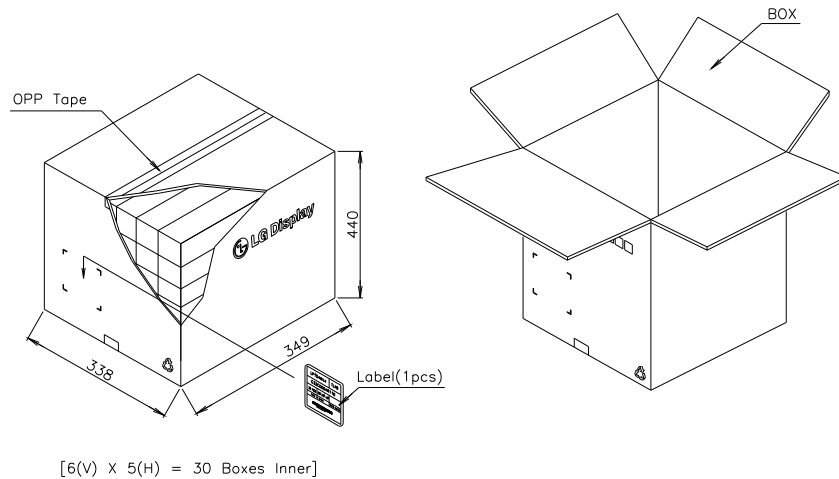

c) Label




[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

11.5. Instruction of changing the parts

11.5.1. Disassembly of Cover Shield

(1) ① Disassembly of Cover Shield (4 Point)


Caution: Pressure or stress should not be given on Source COF.

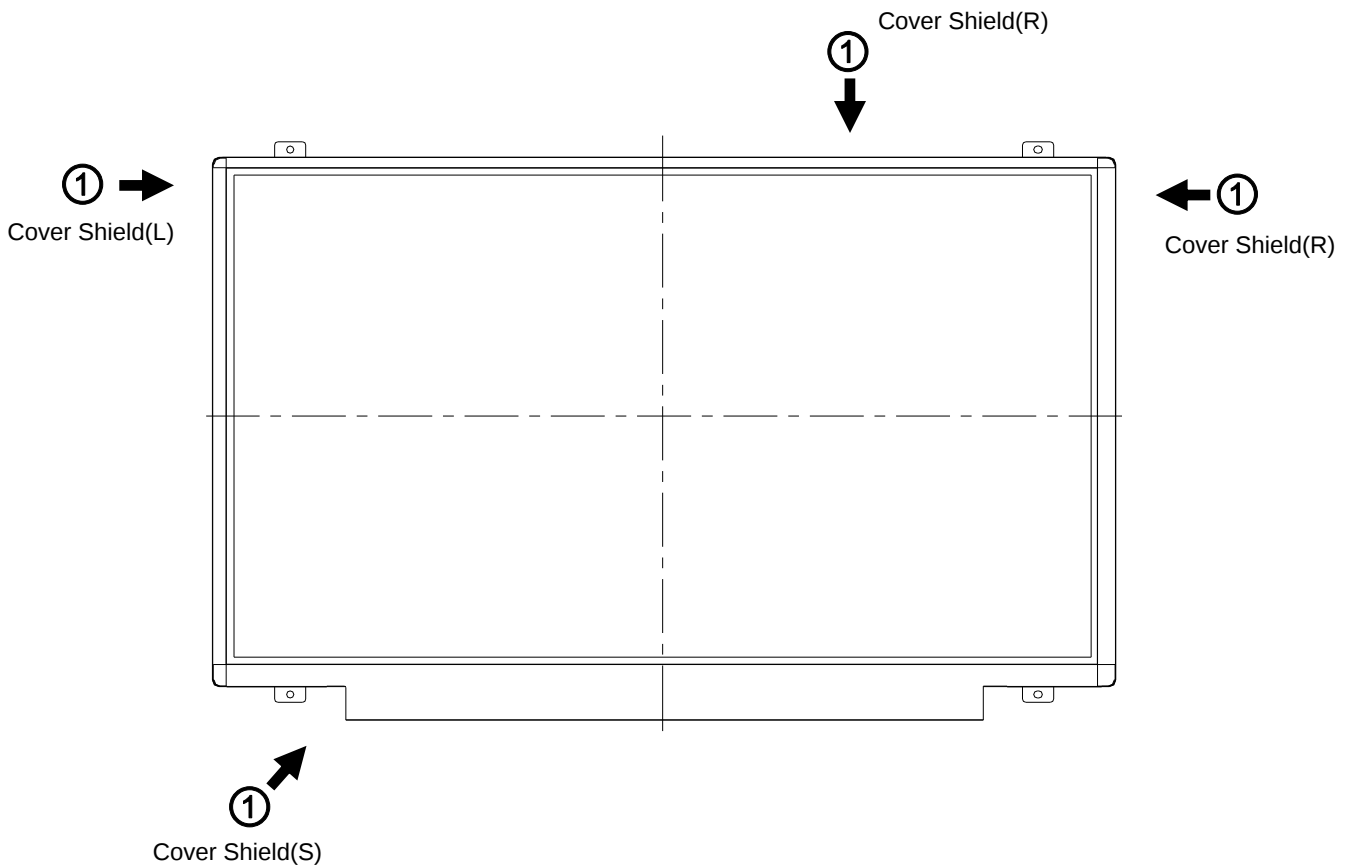

11.5.2. Disassembly of Source PCB

(1) ① Disassembly of Source PCB.

Caution: Pressure or stress should not be given on PCB and COF.

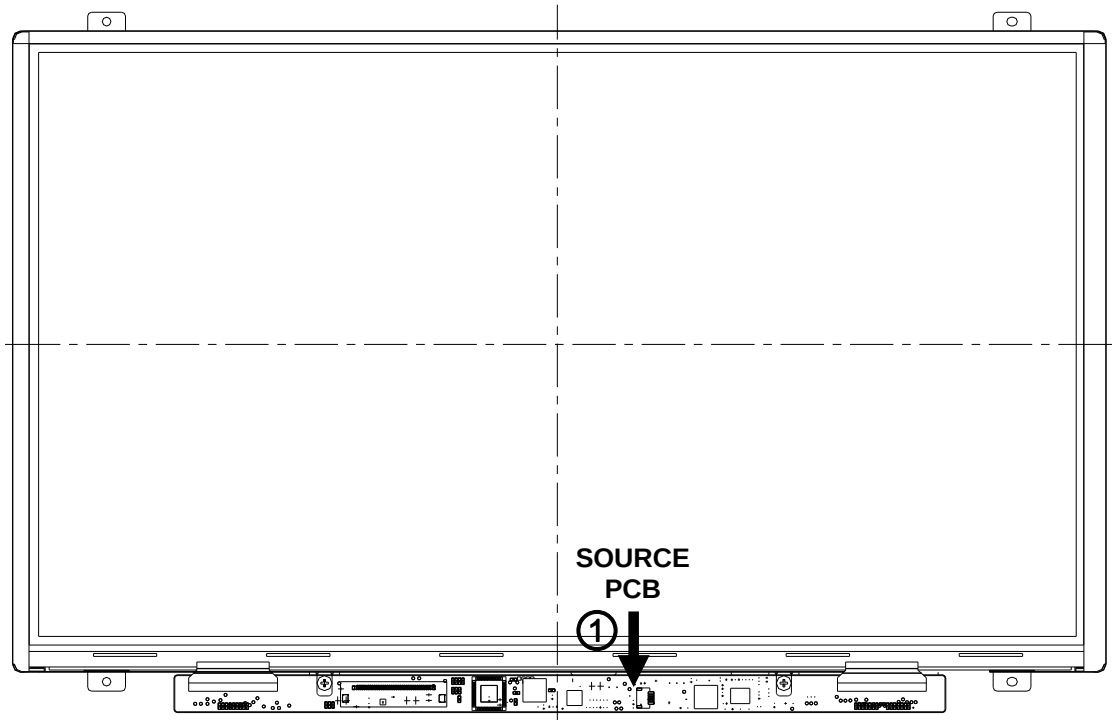

11.5.3. Disassembly of Case top, Board Ass'y, Tape Adhesive, Light guide, Cover Ass'y

(1) ① Disassembly of Cover Shield (4Point)

(2) ② Disassembly of Screw for PCB fixing (2Point)

Caution: Maximum value of torque with Screw should be below 1.5kg.

(3) ③ Disassembly of Board Ass'y.


Caution: This process should be made in Clean room with no scratch nor particle on Polarizer and B/L Ass'y.

(4) ④ Disassembly of Tape Adhesive used for Sheets fixing (4Point).

(5) ⑤ Disassembly of Sheets, Light guide.

Caution: No penetration of foreign body is indispensable with no scratch on the surface of each Sheets.

(5) ⑥ Disassembly of Plate Ass'y

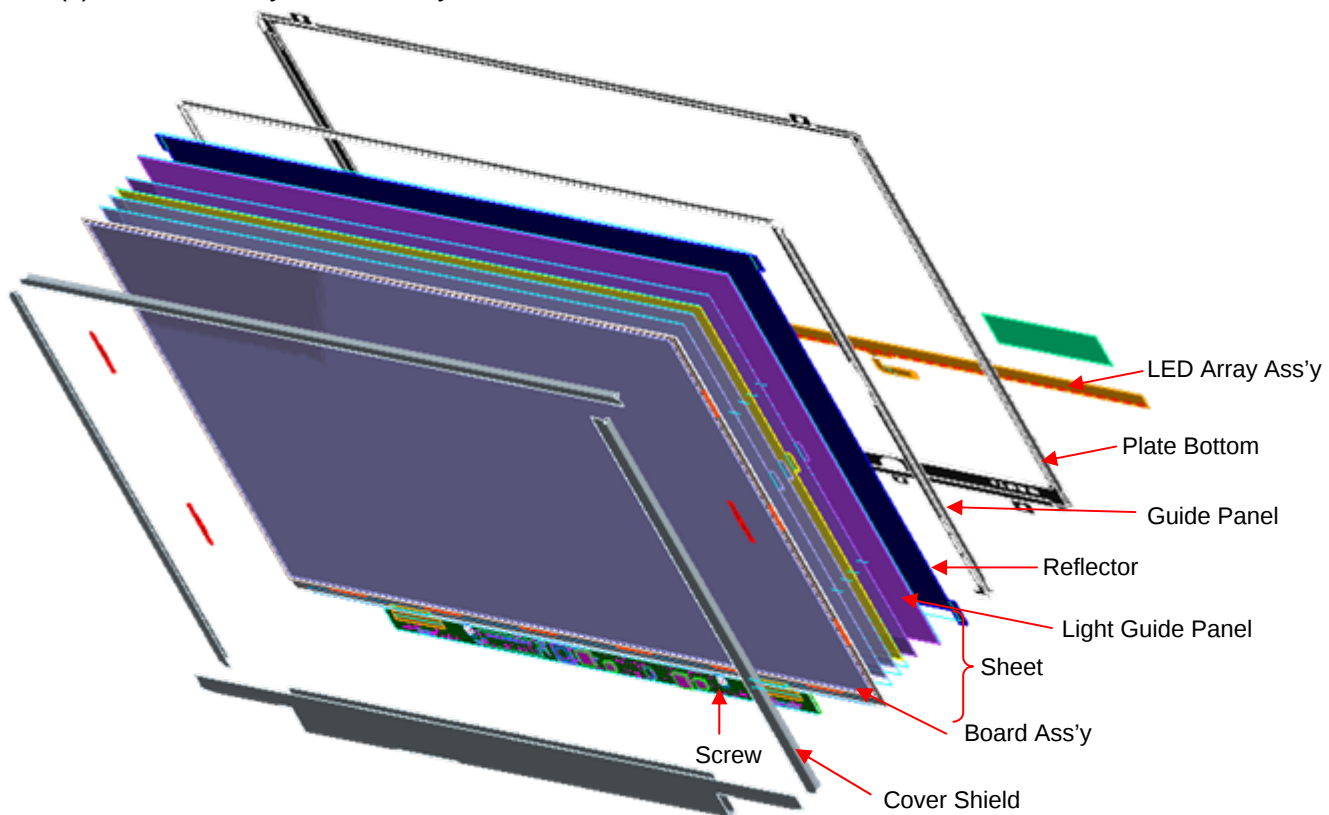

No.	Part	Maker	Maker P/N	Note
1	LGP	Coretronic	PMMA	
2	Diffuser Up	Toray	TPL073	
3	Prism Up	Suntech	SPX2-5SHK	
4	Prism Down	Suntech	SPX2-5SHK	
5	Diffuser Down	Toray Saehan	TDA10N	
6	Reflector	Dupont	UXG7-150	

11.5.4. Assembly of Cover Ass'y, Sheets, Light guide, Tape Adhesive, Board Ass'y and Case top.

(1) ① Assembly of Cover Ass'y

(2) ② Assembly of Light Guide and Sheets.(Reflector Sheet fixing with one Double Tape)

Caution: No penetration of foreign body is indispensable with no scratch on the surface of each Sheet and Light guide.

(3) ③ Assembly of Tape adhesive used for Sheets fixing(4Point)


(4) ④ Assembly of Board Ass'y.

Caution: Pressure or stress should not be given on PCB and COF.

(5) ⑤ Assembly of Screw for PCB fixing

Caution: Maximum value of torque with Screw should be below 1.5kg

(6) ⑤ Assembly of Cover Shield (4Point)

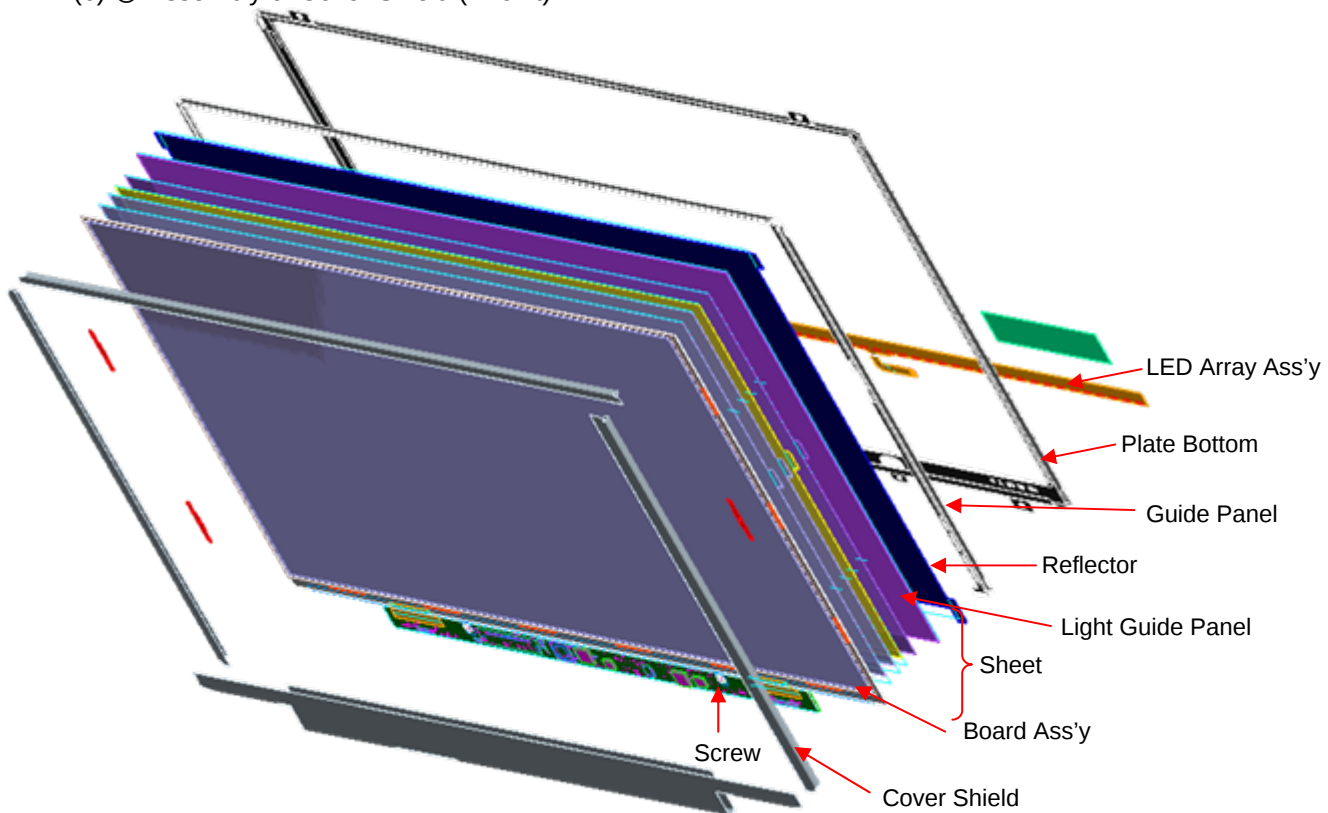

No.	Part	Maker	Maker P/N	Note
1	LGP	Coretronic	PMMA	
2	Diffuser Up	Toray	TPL073	
3	Prism Up	Suntech	SPX2-5SHK	
4	Prism Down	Suntech	SPX2-5SHK	
5	Diffuser Down	Toray Saehan	TDA10N	
6	Reflector	Dupont	UXG7-150	

12. General Precaution

Please pay attention to the followings when you use this TFT LCD module.

12.1. Mounting Precautions

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach a transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case aren't desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaked with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

12.2. Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage : $V = \pm 200\text{mV}$ (Over and under shoot voltage).
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) A module has high frequency circuit. If you need to shield the electromagnetic noise, please co-work. When a Back-light unit is operating, it sounds. If you need to shield the noise, please co-work.

12.3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc . And don't touch interface pin directly.

[HY-LINE Computer Components / www.hy-line.de/computer](http://www.hy-line.de/computer)

12.4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

12.5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

12.6. Handling Precautions for Protection Film

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion- blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer. Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3


	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Header	0	00	Header	00	00000000
	1	01	Header	FF	11111111
	2	02	Header	FF	11111111
	3	03	Header	FF	11111111
	4	04	Header	FF	11111111
	5	05	Header	FF	11111111
	6	06	Header	FF	11111111
	7	07	Header	00	00000000
Vendor / Product EDID Version	8	08	EISA manufacture code (3 Character ID) LGD	30	00110000
	9	09	EISA manufacture code (Compressed ASCII)	E4	11100100
	10	0A	Panel Supplier Reserved - Product Code 0381h	81	10000001
	11	0B	(Hex. LSB first)	03	00000011
	12	0C	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	13	0D	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	14	0E	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	15	0F	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	16	10	Week of Manufacture 00 weeks	00	00000000
	17	11	Year of Manufacture 2012 years	16	00010110
	18	12	EDID structure version # = 1	01	00000001
	19	13	EDID revision # = 3	03	00000011
Display Parameters	20	14	Video input Definition = Digital signal	80	10000000
	21	15	Max H image size (Rounded cm) = 28 cm	1C	00011100
	22	16	Max V image size (Rounded cm) = 16 cm	10	00010000
	23	17	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
	24	18	Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_GTF)	0A	00001010
Panel Color Coordinates	25	19	Red/Green Low Bits (RxRy/GxGy)	DC	11011100
	26	1A	Blue/White Low Bits (BxBY/WxWy)	E5	11100101
	27	1B	Red X Rx = 0.593	97	10010111
	28	1C	Red Y Ry = 0.353	5A	01011010
	29	1D	Green X Gx = 0.335	55	01010101
	30	1E	Green Y Gy = 0.570	92	10010010
	31	1F	Blue X Bx = 0.155	27	00100111
	32	20	Blue Y By = 0.115	1D	00011101
	33	21	White X Wx = 0.313	50	01010000
	34	22	White Y Wy = 0.329	54	01010100
Established Timings	35	23	Established timing 1 (00h if not used)	00	00000000
	36	24	Established timing 2 (00h if not used)	00	00000000
	37	25	Manufacturer's timings (00h if not used)	00	00000000
Standard Timing ID	38	26	Standard timing ID1 (01h if not used)	01	00000001
	39	27	Standard timing ID1 (01h if not used)	01	00000001
	40	28	Standard timing ID2 (01h if not used)	01	00000001
	41	29	Standard timing ID2 (01h if not used)	01	00000001
	42	2A	Standard timing ID3 (01h if not used)	01	00000001
	43	2B	Standard timing ID3 (01h if not used)	01	00000001
	44	2C	Standard timing ID4 (01h if not used)	01	00000001
	45	2D	Standard timing ID4 (01h if not used)	01	00000001
	46	2E	Standard timing ID5 (01h if not used)	01	00000001
	47	2F	Standard timing ID5 (01h if not used)	01	00000001
	48	30	Standard timing ID6 (01h if not used)	01	00000001
	49	31	Standard timing ID6 (01h if not used)	01	00000001
	50	32	Standard timing ID7 (01h if not used)	01	00000001
	51	33	Standard timing ID7 (01h if not used)	01	00000001
	52	34	Standard timing ID8 (01h if not used)	01	00000001
	53	35	Standard timing ID8 (01h if not used)	01	00000001

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54	36	Pixel Clock/10,000 (LSB) 74.6 MHz @ 60Hz	24	00100100
	55	37	Pixel Clock/10,000 (MSB)	1D	00011101
	56	38	Horizontal Active (lower 8 bits) 1366 Pixels	56	01010110
	57	39	Horizontal Blanking(Thp-HA) (lower 8 bits) 207 Pixels	CF	11001111
	58	3A	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	50	01010000
	59	3B	Vertical Active 768 Lines	00	00000000
	60	3C	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 22 Lines	16	00010110
	61	3D	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	30	00110000
	62	3E	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
	63	3F	Horizontal Sync Pulse Width (HSPW) 32 Pixels	20	00100000
	64	40	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 2 Lines : 5 Lines	25	00100101
	65	41	Horizontal Vertical Sync Offset/Width (upper 2bits)	00	00000000
	66	42	Horizontal Image Size (mm) 277 mm	15	00010101
	67	43	Vertical Image Size (mm) 156 mm	9C	10011100
	68	44	Horizontal Image Size / Vertical Image Size	10	00010000
	69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	71	47	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG)	18	00011000
	72	48	Flag	00	00000000
	73	49	Flag	00	00000000
Timing Descriptor #2	74	4A	Flag	00	00000000
	75	4B	Data Type Tag (Descriptor Defined by manufacturer)	00	00000000
	76	4C	Flag	00	00000000
	77	4D	Descriptor Defined by manufacturer	00	00000000
	78	4E	Descriptor Defined by manufacturer	00	00000000
	79	4F	Descriptor Defined by manufacturer	00	00000000
	80	50	Descriptor Defined by manufacturer	00	00000000
	81	51	Descriptor Defined by manufacturer	00	00000000
	82	52	Descriptor Defined by manufacturer	00	00000000
	83	53	Descriptor Defined by manufacturer	00	00000000
	84	54	Descriptor Defined by manufacturer	00	00000000
	85	55	Descriptor Defined by manufacturer	00	00000000
	86	56	Descriptor Defined by manufacturer	00	00000000
	87	57	Descriptor Defined by manufacturer	00	00000000
	88	58	Descriptor Defined by manufacturer	00	00000000
	89	59	Descriptor Defined by manufacturer	00	00000000
Timing Descriptor #3	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type Tag (ASCII String)	FE	11111110
	94	5E	Flag	00	00000000
	95	5F	ASCII String L	4C	01001100
	96	60	ASCII String G	47	01000111
	97	61	ASCII String	20	00100000
	98	62	ASCII String D	44	01000100
	99	63	ASCII String i	69	01101001
	100	64	ASCII String s	73	01110011
	101	65	ASCII String p	70	01110000
	102	66	ASCII String l	6C	01101100
	103	67	ASCII String a	61	01100001
	104	68	ASCII String y	79	01111001
	105	69	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCII code 0Ah,set remaining char = 20h	0A	00001010
	106	6A	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCII code 0Ah,set remaining char = 20h	20	00100000
	107	6B	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASCII code 0Ah,set remaining char = 20h	20	00100000

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #4	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag (ASCII String)	FE	11111110
	112	70	Flag	00	00000000
	113	71	ASCII String L	4C	01001100
	114	72	ASCII String P	50	01010000
	115	73	ASCII String 1	31	00110001
	116	74	ASCII String 2	32	00110010
	117	75	ASCII String 5	35	00110101
	118	76	ASCII String W	57	01010111
	119	77	ASCII String H	48	01001000
	120	78	ASCII String 2	32	00110010
	121	79	ASCII String -	2D	00101101
	122	7A	ASCII String S	53	01010011
	123	7B	ASCII String L	4C	01001100
	124	7C	ASCII String T	54	01010100
	125	7D	ASCII String 2	32	00110010
Checksum	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	25	00100101

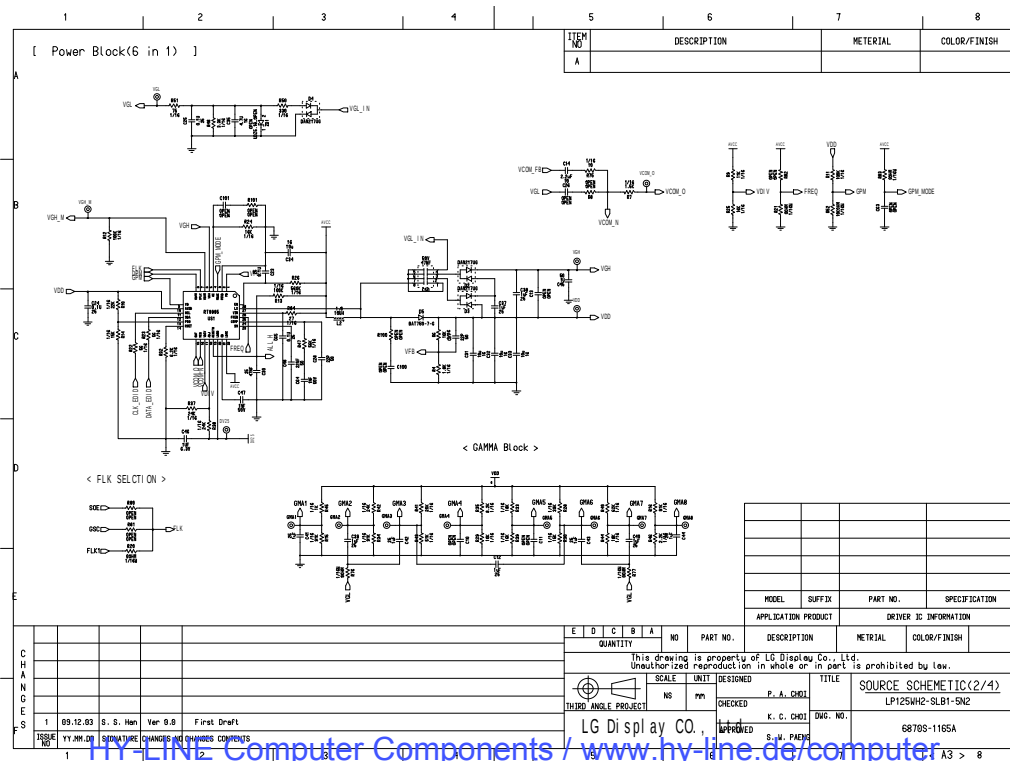[illegible]

[illegible]

APPENDIX C. PCB layout of Circuit

- 1 Layer



- 2 Layer




- 3 Layer



- 4 Layer




- 5 Layer



- 6 Layer



- 7 Layer



- 8 Layer

