

DisplayPort 1.2 Detachable ACTIVE OPTICAL CABLE, DPFC-200D

Description

Detachable DisplayPort 1.2 active optical cable, DPFC-200D, enables to transmit 4K (4096x2160) at 60Hz signal up to 100m (384feet) over plenum graded & LSZH hybrid cable. It avoids any scaling or data compression for lessening a burden of data transmission.

DPFC-200D is designed compact enough to be fitted into various installation environments with cutting edge technology performance.

DPFC-200D offers perfect flexibility during installation by separating DisplayPort connector part and Active Optical Cable part. It gives slim, light, easy installation like a general copper DisplayPort cable.

Optional USB power cable on RX side can be provided upon request for non-standard display device which provides insufficient power to operate.

Specification

- Extends up to 4K (4096x2160) at 60Hz, (RGB & YCbCr : 4:4:4)
- Transmits DisplayPort 1.2 data up to 100m (328feet) over hybrid cable
- Adopts plenum graded & LSZH (Low Smoke Zero Halogen) hybrid cable
- Offers perfect flexibility during installation by separating DisplayPort connector from cable
- Supports Multi-Stream Transport
- Supports 3D contents transmission
- Supports DisplayPort 1.2 standards feature
- Provides optional USB power on the display source (TX) and/or display (RX) side

Applications


- Home AV
- Digital Signage
- Control room
- Conference room
- Rental staging

DisplayPort 1.2 Detachable ACTIVE OPTICAL CABLE, DPFC-200D

Technical Features


0) at 60Hz s/ch 8feet)	
8feet)	
z	
hybrid cable	
(optical fiber + copper cable)	
lay	
/RX side	
ver	
(
0°C to 60°C	
.5 mm	

Dimension [mm]



Connection Diagram

4K (4096x2160) @60Hz up to 100m

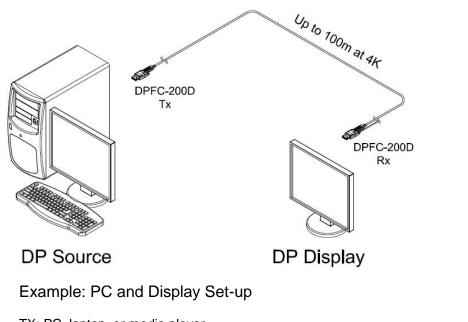

TX: PC, laptop, or media player RX: Monitor, TV and Projector



Opticis Co., Ltd. 3F, 305, Sanseong-daero Sujeong-gu Seongnam-si, Gyeonggi-do, 13354 South Korea Tel: +82 (31) 719-8033 Fax: +82 (31) 719-8032



tosales@opticis.com

All contents are subject to be changed without prior notice.