

EL5363 HDMI® + USB 2.0 Extender

HDMI and USB 2.0 100m Cat 5e/6/7 KVM Extender System

The EL5363 KVM Extender System features the latest and most robust HD video and USB extension technology from Icron Technologies. The EL5363 extends both HDMI and USB 2.0 up to 100m using a single Cat 5e/6/7 cable.



*LEX (Local Extender)
front view*

*REX (Remote Extender)
back view*

Features

The EL5363 KVM Extender lets you place an HDMI host up to 100 meters (330 feet) away from the viewing area using a single Cat 5e/6/7 cable. The system supports full HD video and USB 2.0, providing the ability to control keyboards, mice, flash drives, audio peripherals and other USB 2.0 and 1.1 devices.

Key features include:


- Point-to-point video and USB extension up to 100m over a single CAT 5e/6/7 cable
- Full uncompressed HD video: 4Kp30, 1080p and 1920x1200 resolutions
- 3D
- Deep Color
- x.v. Color
- Lip Sync Pass-through
- CEC Pass-through
- HDCP Pass-through
- USB 2.0 throughput support up to 40 Mbps

Includes ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, OS X® and Linux®

Applications

- Medical Extensions
- Interactive Digital Signage
- Home Theater
- Industrial Control

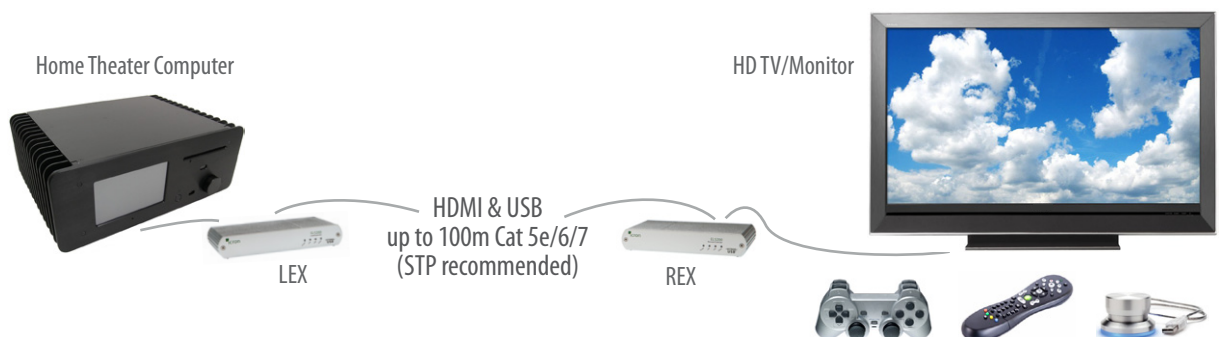

4664 Lougheed Hwy.
Suite 221
Burnaby, BC,
V5C 5T5, Canada

icron.com
sales@icron.com
+1 604 638 3920

←EXTREME
USB®

Specifications subject to
change without notification.
©2016
Icron Technologies Corp.
#90-01409-A01

EL5363 Specifications



Rear view of LEX (top) and REX (bottom)

Vertrieb durch / Distribution by

HY-LINE[®]

COMPUTER COMPONENTS

Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

Cable Type	Electrical Interference Susceptibility
Solid Core Cat 5e/6 UTP	High
Solid Core Cat 5e/6 STP	Moderate
Solid Core Cat 6a UTP	Moderate
Solid Core Cat 6a STP	Low (Recommended)
Solid Core Cat 7 STP	

Note: Maximum distance and product performance will be reduced in the presence of interference or coiled extension cable.

Specifications subject to change without notification.

©2016

Icron Technologies Corp.

#90-01409-A01

RANGE

Direct Connect: Up to 100m (330 ft) over a single Cat 5e/6/7 cable

VIDEO

Resolution: High Definition 4Kp30, 1080p, 1920 x 1200
Color: 36-bit, Deep Color, and x.v. Color
Depth: 2D and 3D
Latency: Less than 1ms

SPEEDS

USB 2.0: Up to 40 Mbps
USB 1.1: Up to 12 Mbps

LEX

Video Connector: 1 x HDMI
USB Connector: 1 x USB Type B Receptacle
Link Connector: 1 x RJ45
Dimensions: 112mm x 175mm x 30mm (4.4" x 6.9" x 1.2")
Enclosure Material: Silver Anodized Aluminum
Power Supply: 100-240V AC input, 5V DC output

REX

Video Connector: 1 x HDMI
USB Connectors: 3 x USB Type A Receptacles
Link Connector: 1 x RJ45
Dimensions: 112mm x 175mm x 30mm (4.4" x 6.9" x 1.2")
Enclosure Material: Silver Anodized Aluminum
Available Current: 500mA for each USB port
Power Supply: 100-240V AC input, 5V DC output

ENVIRONMENTAL

Operating Temperature: 0°C to 40°C (32°F to 104°F)
Operating Humidity: 20% to 80% relative humidity, non-condensing

COMPLIANCE

EMC: FCC (Class A), CE (Class A), ICES-003
Environmental: RoHS2 (CE)

SUPPORT

Warranty: 2-year

Ordering Information

The EL5363 system includes a LEX, REX, USB cable, HDMI cable, Quick Start Guide, two international power adapters with country specific power cords and two-year warranty. For more information email sales@icron.com or call +1 604 638 3920.

PART #	NAME	DESCRIPTION
00-00386	EL5363 - NA	HDMI+USB 2.0 1920x1200 100m single CAT 5e/6/7 KVM Extender System, 100-240V NA Power Cords
00-00387	EL5363 - EU	HDMI+USB 2.0 1920x1200 100m single CAT 5e/6/7 KVM Extender System, 100-240V EU Power Cords
00-00388	EL5363 - AU	HDMI+USB 2.0 1920x1200 100m single CAT 5e/6/7 KVM Extender System, 100-240V AU Power Cords
00-00389	EL5363 - UK	HDMI+USB 2.0 1920x1200 100m single CAT 5e/6/7 KVM Extender System, 100-240V UK Power Cords
00-00390	EL5363 - JP	HDMI+USB 2.0 1920x1200 100m single CAT 5e/6/7 KVM Extender System, 100-240V JP Power Cords
00-00287	KVM Mounting Kit	Four Brackets for EL/VU Series