



## CMO

### 4G/Multiband MIMO Puck Antenna

#### Features

- Low Profile Puck Antenna
- 2 x 4G/LTE/Multiband Elements
- Fully Waterproof when mounted

#### Specifications

	Element 1	Element 2
Frequency range	690-800/800-960/1710-2170/2500-2700 MHz	690-800/800-960/1710-2170/2500-2700 MHz
Peak gain	1 / 2.5 / 3.8 / 5 dBi	1 / 2.5 / 3.7 / 5 dBi
Polarisation	Linear	Linear
VSWR	<3.0:1	<2.5:1
Power rating	10W	10W
Impedance	50 Ohm	50 Ohm
Dimensions	102 x 33.5mm (dxh)	

#### Ordering Options

FCMO35303-SMSM-1K	CMO antenna with 2 x 1M RG-174 and SMA-Male
FCMO35303-SMSM-2K	CMO antenna with 2 x 2M RG-174 and SMA-Male
FCMO35303-SMSM-3K	CMO antenna with 3 x 3M RG-174 and SMA-Male


Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK


Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com

## CMO | 4G/LTE/Multiband Puck Antenna

### Element 1 VSWR

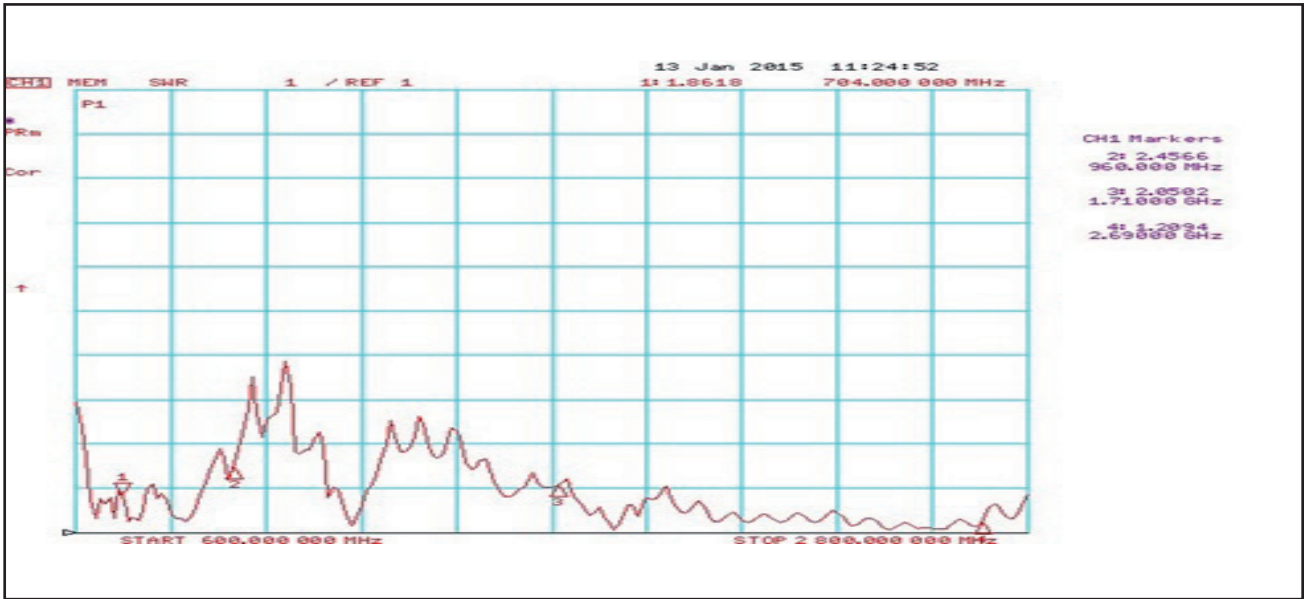

### Element 2 VSWR

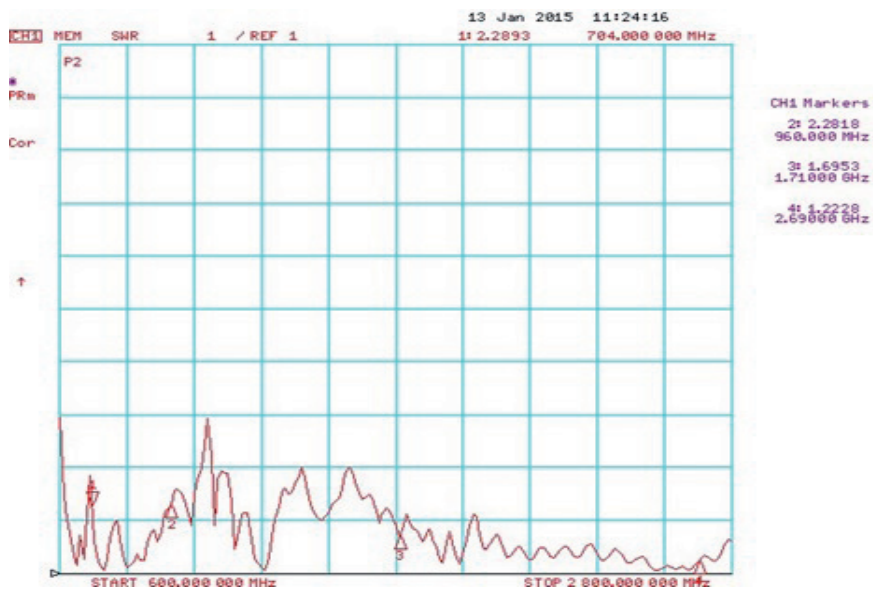

Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com