



PHI-CON

15 W DC-DC Converter P15F-Series

- Wide 4:1 Input Range
- 1600 V_{DC} Isolation
- No Minimum Load Required
- Continuous Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- Efficiency up to 89 %
- 15 mA no load Input Current
- Wide Operation Temperature Range -40...85 °C
- On / Off Remote Control Input
- Soft Start



Model guide

Type	Input voltage		Input current		Output voltage [V _{DC}]	Output current		Efficiency typ. [%]	Capacitor Load [μF] max.
	Nominal [V _{DC}]	Range [V _{DC}]	no load [mA] typ.	full load [mA] typ.		[mA] min.	[mA] max.		
Single output									
P15F243R3S	24	9...36	15	650	3.3	0	4000	86	1000
P15F2405S	24	9...36	15	730	5.0	0	3000	87	1000
P15F2412S	24	9...36	15	750	12.0	0	1300	88	330
P15F2415S	24	9...36	15	710	15.0	0	1000	89	220
P15F483R3S	48	18...75	10	330	3.3	0	4000	84	1000
P15F4805S	48	18...75	10	370	5.0	0	3000	86	1000
P15F4812S	48	18...75	10	380	12.0	0	1300	87	330
P15F4815S	48	18...75	10	360	15.0	0	1000	88	220
Dual output									
P15F2405D	24	9...36	15	750	±5.0	0	±1500	85	2 x 470
P15F2412D	24	9...36	15	720	±12.0	0	±625	88	2 x 220
P15F2415D	24	9...36	15	710	±15.0	0	±500	89	2 x 100
P15F4805D	48	18...75	10	380	±5.0	0	±1500	84	2 x 470
P15F4812D	48	18...75	10	360	±12.0	0	±625	87	2 x 220
P15F4815D	48	18...75	10	360	±15.0	0	±500	88	2 x 100

Suffix „K” for heat sink version, e.g.: P15F2415SK

Specifications

Input	
Filter	Pi Network
Start up time with R-load	20 ms, typ.
Reflected ripple current	20 mAp-p, (see fig. 2)
ON / OFF Control threshold (see fig. 5)	On: 3...12 V or open input Off: 0...1.2 V Standby current 5 mA typ.
Isolation:	
Input / output voltage	1600 V _{DC}
Input or output to case	1000 V _{DC}
Resistance	10 ⁹ Ω
Capacitance	1200 pF, max.
Output	
Voltage accuracy	± 1 %, max.
Voltage trim range (see fig. 4)	± 10 %
Voltage balance at dual outputs	± 1 % at balanced load
Line regulation	P15FxxxS: ± 0.2 %, max. P15FxxxD: ± 0.5 %, max.
Cross regulation @ dual outputs	± 5 % @ 75 % load difference
Load regulation 0...100 % load	P15FxxxS: ± 0.5 %, max. P15FxxxD: ± 1 %, max.
Transient recovery time	250 μs, typ.
Transient response drift @ 25 % load change steps	3 %, max.
Temperature coefficient	± 0.02 % / °C
Ripple and noise (at 20 MHz BW)	100 mVp-p, max., (see fig. 3)
Short circuit protection	Indefinite (hiccup), Automatic restart
Over current protection	170 % of I _{out} , max.
Over voltage protection	Z-diode clamping
P15Fxx3R3S	3.9 V
P15Fxx05x	6.2 V
P15Fxx12x	15 V
P15Fxx15x	18 V

General	
Switching frequency	375 kHz, typ
Safety Standard	EN 60950-1, IEC 60950-1
Reliability calculated MTBF MIL-HDBK-217F	560 k hours at 25 °C
EMC Characteristics	
Radiated Emissions	EN55022 class A
Conducted Emissions (see fig.1)	EN55022 class A
ESD	EN61000-4-2 perf. criteria A
RS	EN61000-4-3 perf. criteria A
EFT (see fig.1)	EN61000-4-4 perf. criteria A
Surge (see fig.1)	EN61000-4-5 perf. criteria A
CS	EN61000-4-6 perf. criteria A
PFMF	EN61000-4-8 perf. criteria A
Environmental	
Operating temperature ambient	-40...66 °C -40...85 °C, with derating
Case temperature	105 °C max.
Storage temperature	-55...125 °C
Derating	see diagram
Humidity	Up to 95 %, non condensing
Free air convection cooling	15...33 cm/s
Physical	
Dimensions	25.4 x 25.4 x 10.4 mm
Weight	18 g
Case material	Nickel coated copper
Potting material	Epoxy (UL94V-0 rated)
Absolute maximum ratings	
Input voltage P15F24xxx	50 V _{DC} , 100 ms max.
Input voltage P15F48xxx	100 V _{DC} , 100 ms max.
Pin soldering temperature 1.5 mm distance from body	260 °C max., 10 s max.

15 W DC-DC Converter P15F-Series



15 W DC-DC Converter P15F-Series

Fig. 2 Measure circuit for input ripple current

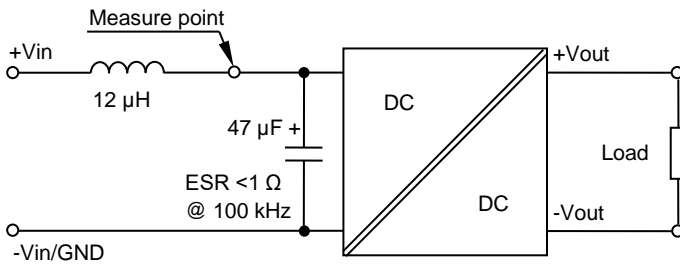


Fig. 3 Measure circuit for output ripple & noise voltage



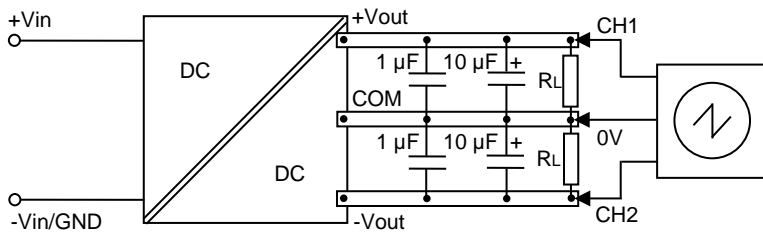


Fig.1 Typical input filter circuits

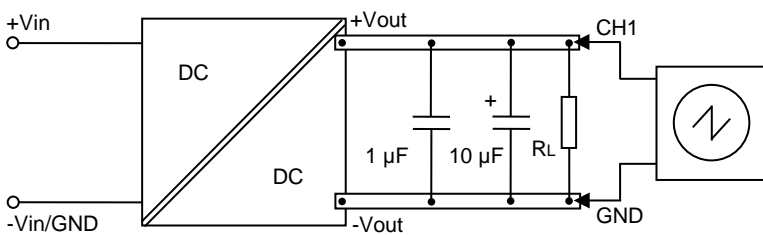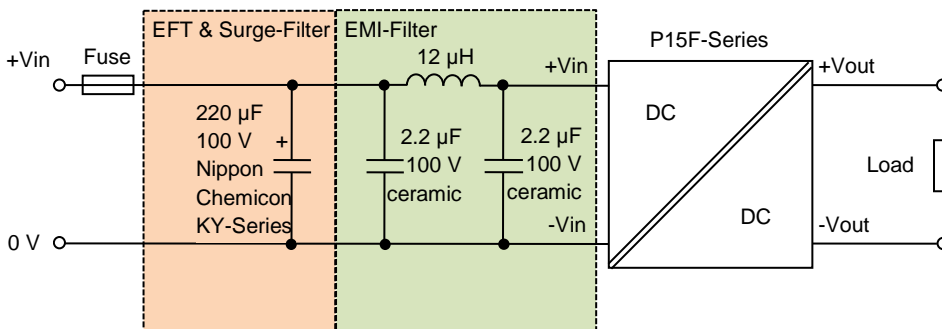

15 W DC-DC Converter P15F-Series

Fig. 5 ON/OFF remote control application

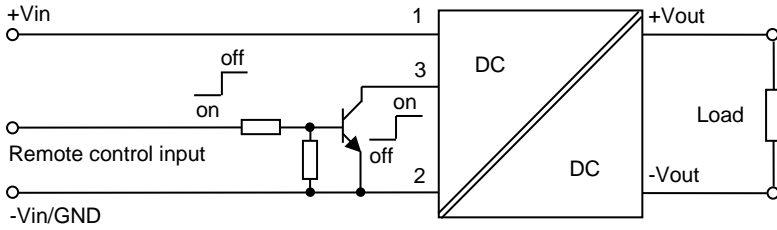


Fig. 4 Output voltage trimming application

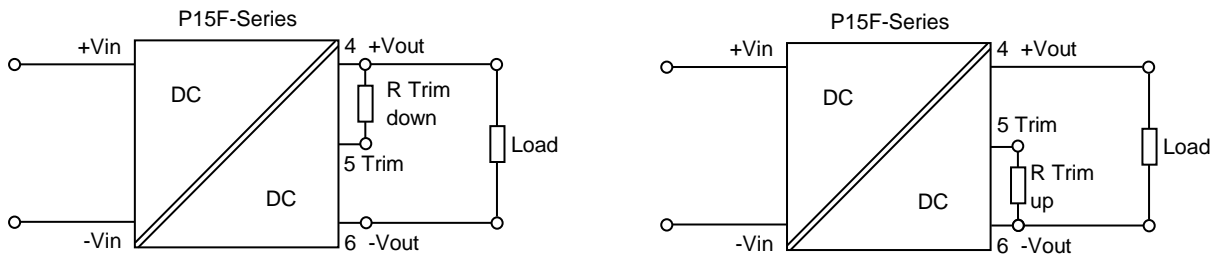


Table of trimming resistors

Vout 3.3V - types											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	%
Vout=	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970	Volts
Rtrim-down	286.268	154.699	100.178	70.355	51.546	38.601	29.147	21.940	16.264	11.678	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630	Volts
Rtrim-up	494.831	167.448	93.381	60.637	42.176	30.327	22.077	16.002	11.342	7.655	KOhms

Vout 5V - types											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	%
Vout=	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500	Volts
Rtrim-down	230.566	106.182	64.301	43.281	30.643	22.207	16.177	11.651	8.129	5.310	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500	Volts
Rtrim-up	244.547	113.776	70.631	49.142	36.274	27.707	21.592	17.010	13.447	10.598	KOhms

Vout 12V - types											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	%
Vout=	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800	Volts
Rtrim-down	273.344	135.217	84.017	57.325	40.944	29.865	21.873	15.836	11.114	7.320	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200	Volts
Rtrim-up	462.903	197.859	120.658	83.855	62.317	48.178	38.184	30.746	24.994	20.413	KOhms

Vout 15V - types											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	%
Vout=	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500	Volts
Rtrim-down	433.811	174.916	100.946	65.907	45.468	32.077	22.625	15.596	10.165	5.842	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500	Volts
Rtrim-up	347.293	178.523	115.235	82.084	61.683	47.863	37.882	30.336	24.430	19.682	KOhms


Notes:

1. Capacitive load is specified by minimal input voltage and maximum resistive load.
2. Alle values are specified by ambient temperature 25 °C, nominal input voltage and rated output current.

15 W DC-DC Converter P15F-Series




PHI-CON

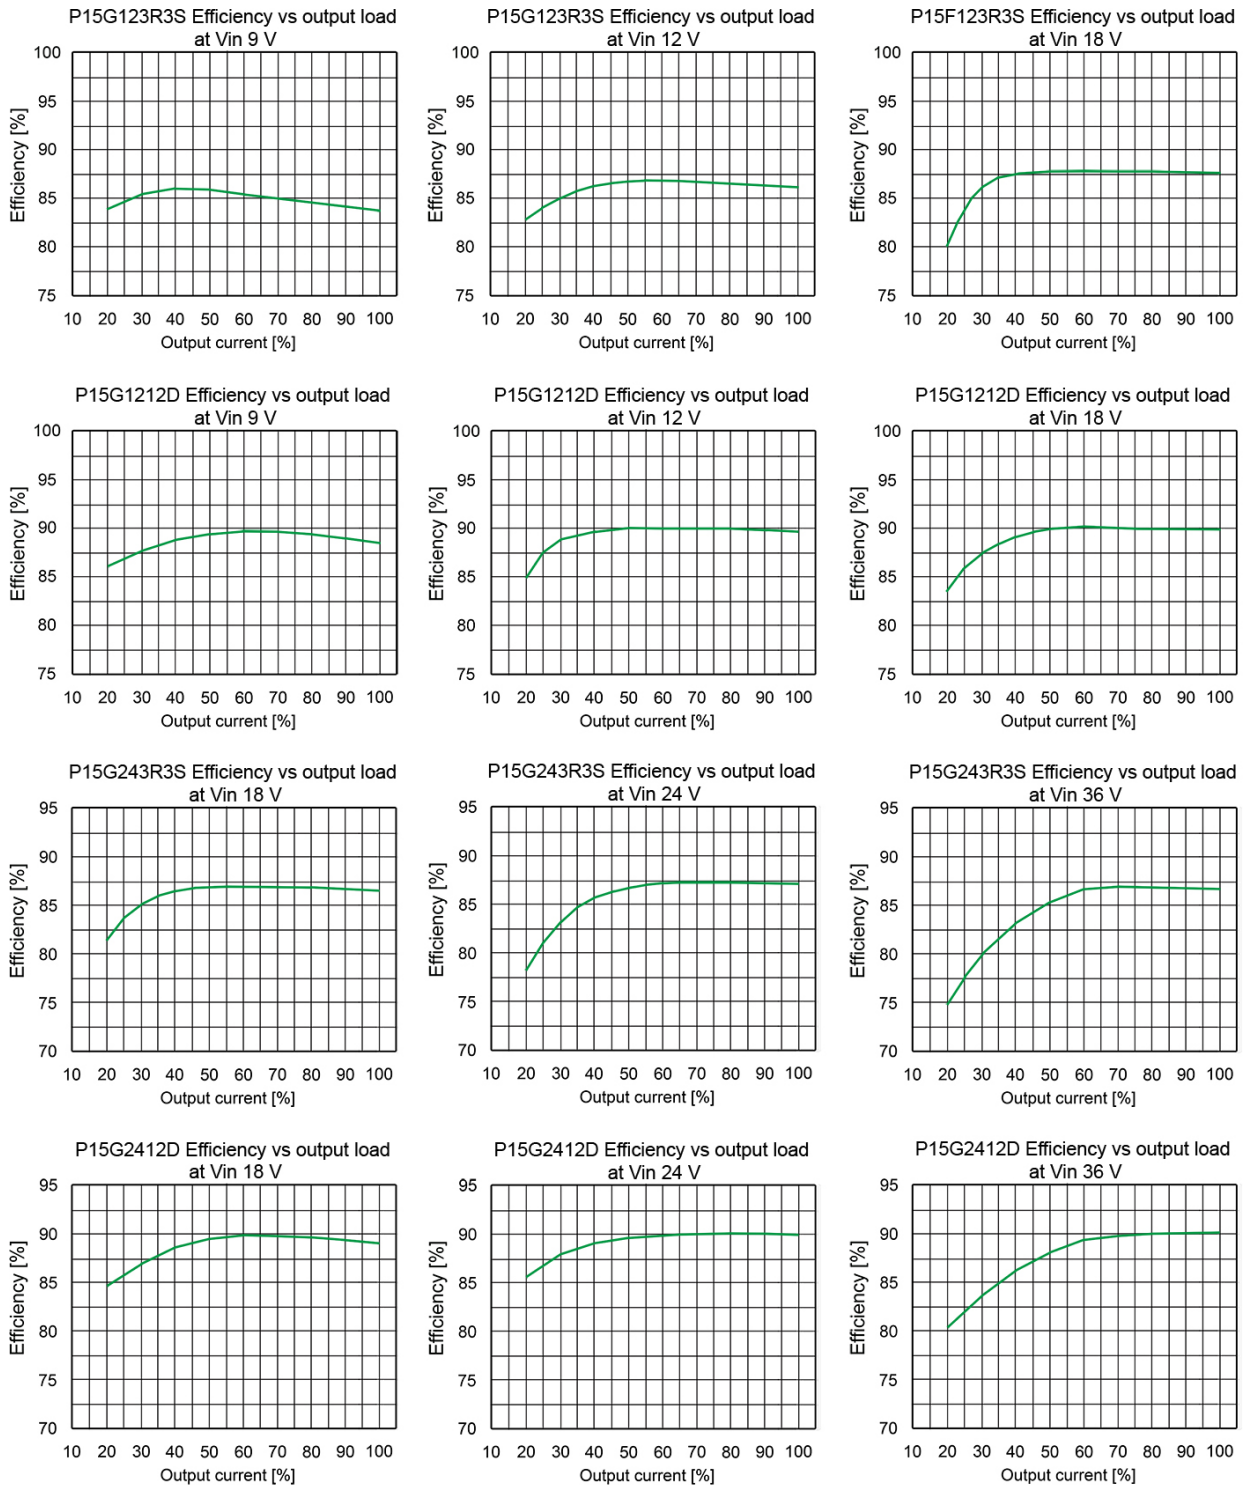


15 W DC-DC Converter P15F-Series

Derating diagram

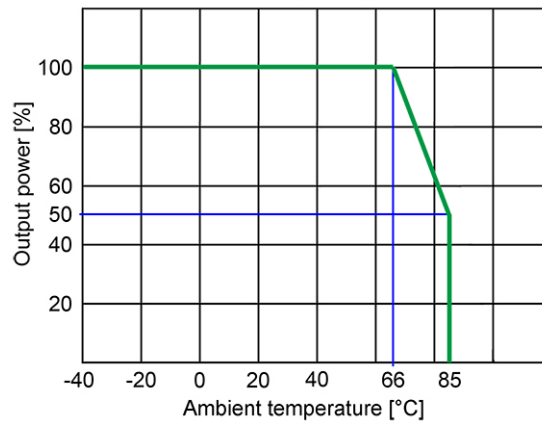

Dimensions

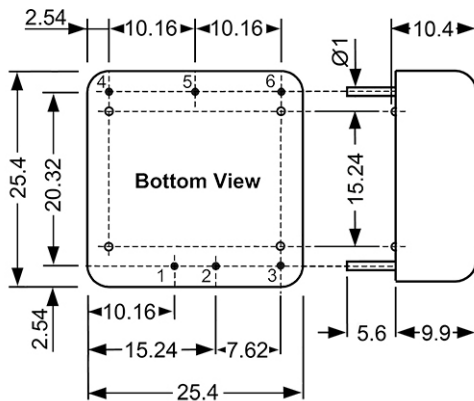

Unit in mm

1. Pin pitch tolerance ± 0.35 mm
2. Pin length tolerance ± 0.35 mm
3. Case tolerance ± 0.5 mm
4. Stand off tolerance ± 0.1 mm

Pin assignment		
Pin	Single output	Dual output
1	+V Input	+V Input
2	-V Input	-V Input
3	Remote control	Remote control
4	+V Output	+V Output
5	Trim Input	Common
6	-Vout	-Vout

PHI-CON is a trademark of HY-LINE Holding GmbH.

Only for professional use by professionals! Not for resale or distribution to the general public in any way! Read the instructions carefully before using!

Life Support Policy: HY-LINE does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user. Rev: 20171212 f